



HUBBELLPRO Ground Fault Receptacles



HUBBELLPRO provides an innovative self-test technology with a new contemporary look. The appealing smooth style and low profile satin finish are sure to complement any décor.

The face of the device blends in with the surrounding interior. All distracting stepped surfaces, lights and conspicuous text markings have been minimized.

This safety solution includes tamper resistant (TR), weather resistant (WR) and standard (non TRWR) options in 7 different color choices.

Quick and easy installation is essential for any installer. The new HUBBELLPRO provides an expanded ground wire area along with guide pockets at every termination. This allows for rapid internal back wire installation. The face design offers a flush, smooth look when the wall plate is added for the final touch.

This new ground fault solution is ideal for the residential market, including adult communities, multifamily, dormitories, hotels and homes. Retail, restaurant and commercial office environments would be suitable, as well.

Applications include kitchens, bathrooms, garages, basements, laundry areas, workshops, wet or damp locations and outdoor porches and decks.

HUBBELLPRO Ground Fault Receptacles

Features and Benefits

- Appealing style with a flush, smooth profile and satin finish to complement any décor
- All distracting stepped surfaces on face, including lights and conspicuous text, have been eliminated
- Patented tamper resistant mechanism designed specifically for residential applications
- Patented auto monitor, power denial technology, first in the industry introduced over 15 years ago
- Clear indication if unit can no longer provide protection (LED red flashes) and will not reset



Ordering Information

Description	Color	Standard		Tamper Resistant		Tamper/Weather Resistant	
		15A	20A	15A	20A	15A	20A
HUBBELLPRO Ground Fault Receptacle	Brown	GF15	GF20	GFT15	GFT20	GFTW15	GFTW20
	Ivory	GF15I	GF20I	GFT15I	GFT20I	GFTW15I	GFTW20I
	White	GF15W	GF20W	GFT15W	GFT20W	GFTW15W	GFTW20W
	Gray	GF15GY	GF20GY	GFT15GY	GFT20GY	GFTW15GY	GFTW20GY
	Black	GF15BK	GF20BK	GFT15BK	GFT20BK	GFTW15BK	GFTW20BK
	Red	GF15R	GF20R	GFT15R	GFT20R	GFTW15R	GFTW20R
	Light Almond	GF15LA	GF20LA	GFT15LA	GFT20LA	GFTW15LA	GFTW20LA



Code and Standard Compliance

National Electric Code®	Compliant with NEC® 406.12 and NEC® 517-18c for Tamper Resistance Compliant with NEC® 406.9 for Weather Resistance
Industry Standards	NEMA WD6, ANSI C-73, NOM, Canadian Electric Code

Ratings

Amperage	15 Amp/20 Amp
Feed-thru	20 Amp Protection
Voltage	102V to 132V AC
Horsepower	1 @ 120V AC
Flammability	V2 per UL 94
Operating Temperature	(-30°F to 150°F)


Certifications

UL File	E41978
UL498	Receptacle
UL943 GFCI	GFCI
NEC	TR, TR,WR
CSA Std	C22.2 No 42
CSA Tech	No. M-012A

Construction

Termination	Back and Side
Terminal	#14 -10 AWG
Grounding	Autoground Clip
Indicators	End of Life
Configuration	2 Pole, 3 Wire NEMA 5-15R, 5-20R

Dimensions

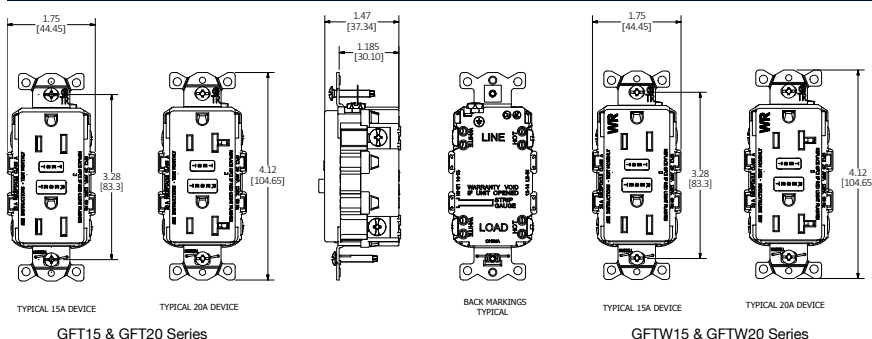

GFT15 & GFT20 Series

GFTW15 & GFTW20 Series

HUBBELL®
Wiring Device-Kellems

www.hubbell-wiring.com



Hubbell Wiring Systems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484 • Phone (800) 288-6000 • FAX (800) 255-1031
Printed in U.S.A. Specifications subject to change without notice.

WLFG006 8/17