

# PL V 10W DIR TITANIUM LED SERIES



PL:EDGE  
SERIES

PRO



10W REPLACES




26W  
CFL

60% Energy Savings

- Easy to install - Plug & Play Direct
- Ballast smart control technology
- Exceptional efficacy 102 LPW
- Dimmable on 0-10V circuits
- Compatible with most electronic ballasts
- Available in 2700K, 3000K, 3500K & 4000K CCT



50,000 H



BALLAST  
COMPATIBLE



DiRect



WARRANTY



CRI (Ra)



DIMMABLE



LM 79

LM 80

TM 21



## PL PRODUCT FEATURES

### High Performance - Ballast Smart Control


The PL DIR lamp's ballast smart control technology allows for high performance even on lower powered ballasts, making it a suitable replacement for 13W, 18W, 26W, 32W and 42W CFL PL lamps.

Ballast Type	Lumens	Bare Lamp
13W	590	5.4W
18W	820	6.5W
26W	1020	10W

### Innovative Round Design - Patent Pending



GREEN CREATIVE PL V LED Lamp




Other PL V LED Lamp

The PL V lamp features a patent pending fully round design. Compared to other square shaped PL vertical lamps, the GREEN CREATIVE PL V improves the overall light output and aesthetics of the fixture.

# PL V 10W DIR TITANIUM LED SERIES

## APPLICATIONS

### Retail

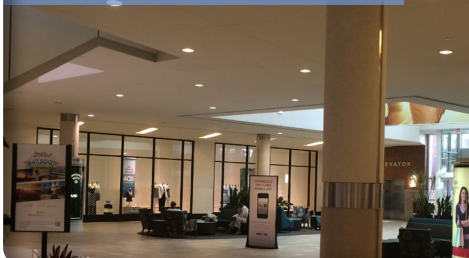


### Hospitality



### Office



**Base:** G24q & GX24q (4-pin CFL)  
**Voltage:** Ballast compatible 120-277V  
**Dimmable:** Yes  
**PF:** 0.9  
**Lifetime:** 50,000 hrs  
**Weight:** 0.20lb / 91g

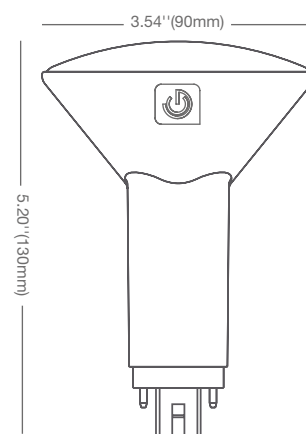

## SPECIFICATIONS\*

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
<b>10PLV/827/DIR</b>	57914	10	Soft White 2700K	80	950	95	120°
<b>10PLV/830/DIR</b>	57915	10	Warm White 3000K	80	1000	100	120°
<b>10PLV/835/DIR</b>	57916	10	Neutral White 3500K	80	1000	100	120°
<b>10PLV/840/DIR</b>	57917	10	Cool White 4000K	80	1020	102	120°

## BALLAST PERFORMANCE

Ballast Type	Bare Lamp (W)	System (W)	2700K Lumens	3000K Lumens	3500K Lumens	4000K Lumens
<b>13W</b>	<b>5.4</b>	<b>7.2</b>	<b>550</b>	<b>540</b>	<b>540</b>	<b>590</b>
<b>18W</b>	<b>6.5</b>	<b>8.7</b>	<b>720</b>	<b>760</b>	<b>760</b>	<b>820</b>
<b>26W</b>	<b>10</b>	<b>12.5</b>	<b>950</b>	<b>1000</b>	<b>1000</b>	<b>1020</b>
<b>42W</b>	<b>10.4</b>	<b>13</b>	<b>1050</b>	<b>1100</b>	<b>1100</b>	<b>1150</b>

Testing Method: Power and lumen output will vary based on number of lamps, ballast and fixture type. Above data is indicative only.

\* Specification data is preliminary and may be subject to change

\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

\*\*\* Not intended for use in enclosed fixtures

\*\*\*\* Full installation guide and more details available on website