

## NEX-707-LED

### Incandescent Emergency/LED Exit Combination with Square Adjustable Heads

Lamp: (2)5VA/T5WB Emergency / LED source Exit

#### PRODUCT DESCRIPTION

Exit sign with dual emergency fixtures feature full vertical adjustment allowing square heads to be positioned to the top, corners, or side of the exit sign. Exit sign is powered by LED source for maximum life without maintenance; emergency fixtures utilize reduced glare incandescent sources with a lens diffuser. In the event of power loss, both sign and heads will operate for a minimum of 90 minutes. Additional battery may be added to allow operation of two 5.4VA remote fixtures.

#### BODY

Injection-molded dual housing with 1/2" replaceable knockouts for power conduit feed.

#### FACE

##### EXIT

- Single or dual configuration. Optional solid face panel is included.
- 6" high text with color diffusion
- Knockout directional chevrons

##### EMERGENCY

- Two adjustable arms with square heads complete with specular reflector and diffuser lens for T5 light source

#### MOUNTING

- Wall or ceiling
- Mounting hardware included

#### ELECTRICAL

##### Voltage

- Dual 120V/277V Input

##### Power Consumption

- 3.8 Watts, normal operation
- 15 Watts, emergency operation, with capacity for 10.8 additional watts if using remote fixtures and additional battery.

##### Light Source

- Exit: LED strip for normal operation
- Emergency: 2 X 5.4 T5 6V Wedge Base Incandescent Lamps

##### Battery

- 6V 4.5 Replaceable lead-calcium battery operates integral heads and exit LED sources. Additional battery can be added to operate two 5.4W remote fixtures
- 90 minute emergency operation
- Internal solid state charging circuit Testing
- High-charge/ready operation indicator light
- Test button Circuitry Protection
- Isolated surge/short circuit protection

#### LIFE EXPECTANCY

- LED and PC circuitry are rated for a minimum of 25 years with no change in illumination level.
- Emergency lamps and lead calcium battery require standard maintenance.

#### APPROVALS

- UL 924
- NFPA
- NEC
- State & Municipal



#### LED Exit Sign

Catalog No.	Lettering
<b>NeX-707-LED</b>	<b>G</b> = Green
	<b>R</b> = Red

**NORALIGHTING.**


Type

Project

Catalog No.

Lamp/Wattage

#### DIMENSIONS

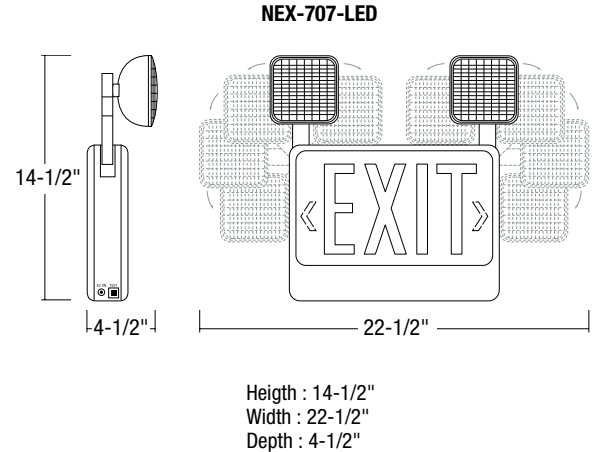

#### ACCESSORIES

- NE-837 5.4W T5 Square Emergency Remote Fixture
- NEXS-P1 Clear Plastic Shield\*
- NEXS-M3 Metal Shield
- NEXL-S Salida Face

\* Use of Plastic Shield will limit adjustability of emergency heads

Create a complete track head number: Example: NEX-707-LED R

**NORALIGHTING.**

6505 Gayhart St., Commerce, CA 90040 • Phone: 800.686.6672 • FAX: 800.500.9955 • [www.noralighting.com](http://www.noralighting.com)  
e-mail: [nora@noralighting.com](mailto:nora@noralighting.com) • Specifications subject to change without notice. © 2014