



Catalog Number	11394
UPC Number	60198611394
Description	Nylon Insulated Ring Terminals 6 AWG




Features

Color Coded insulation for easy identification
 Manufactured from high strength copper alloy
 Electro-tin plated for corrosion resistance
 Expanded Insulation funnel entry eliminates strand "Hang Up", increases the crimping rates and the reliability of the termination
 Wire range stamped on the surface for easy interpretation
 Brazed seam prevent splitting under maximum pressure
 Serrated barrel & flared position of sleeve provides excellent contact & mechanical stress relief at insulation & barrel junction

General

Insulation Type	Nylon
Material	Copper
Finish	Electro-tin plated
Color	Blue
Wire Range	6 AWG
Stud Size	1/4



Dimension Information

L Inches (mm)	1.606
W Inches (mm)	0.472
D Inches (mm)	0.433
d1 Inches (mm)	0.228
d2 Inches (mm)	0.252
E Inches (mm)	0.846
F Inches (mm)	0.524
T Inches (mm)	0.059

Specifications

Temperature Rating	105°C
Voltage Rating	600 V
Flammability Rating	UL94V-O
Amp Rating	6 AWG 95 Amps

Packaging

Bag Qty	100
Master Bag Qty	1000

Certifications


UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
△	RDK-97127	2009/09/01
△	RDK-98020	2009/09/01
△	B210- -91018	2009/09/02

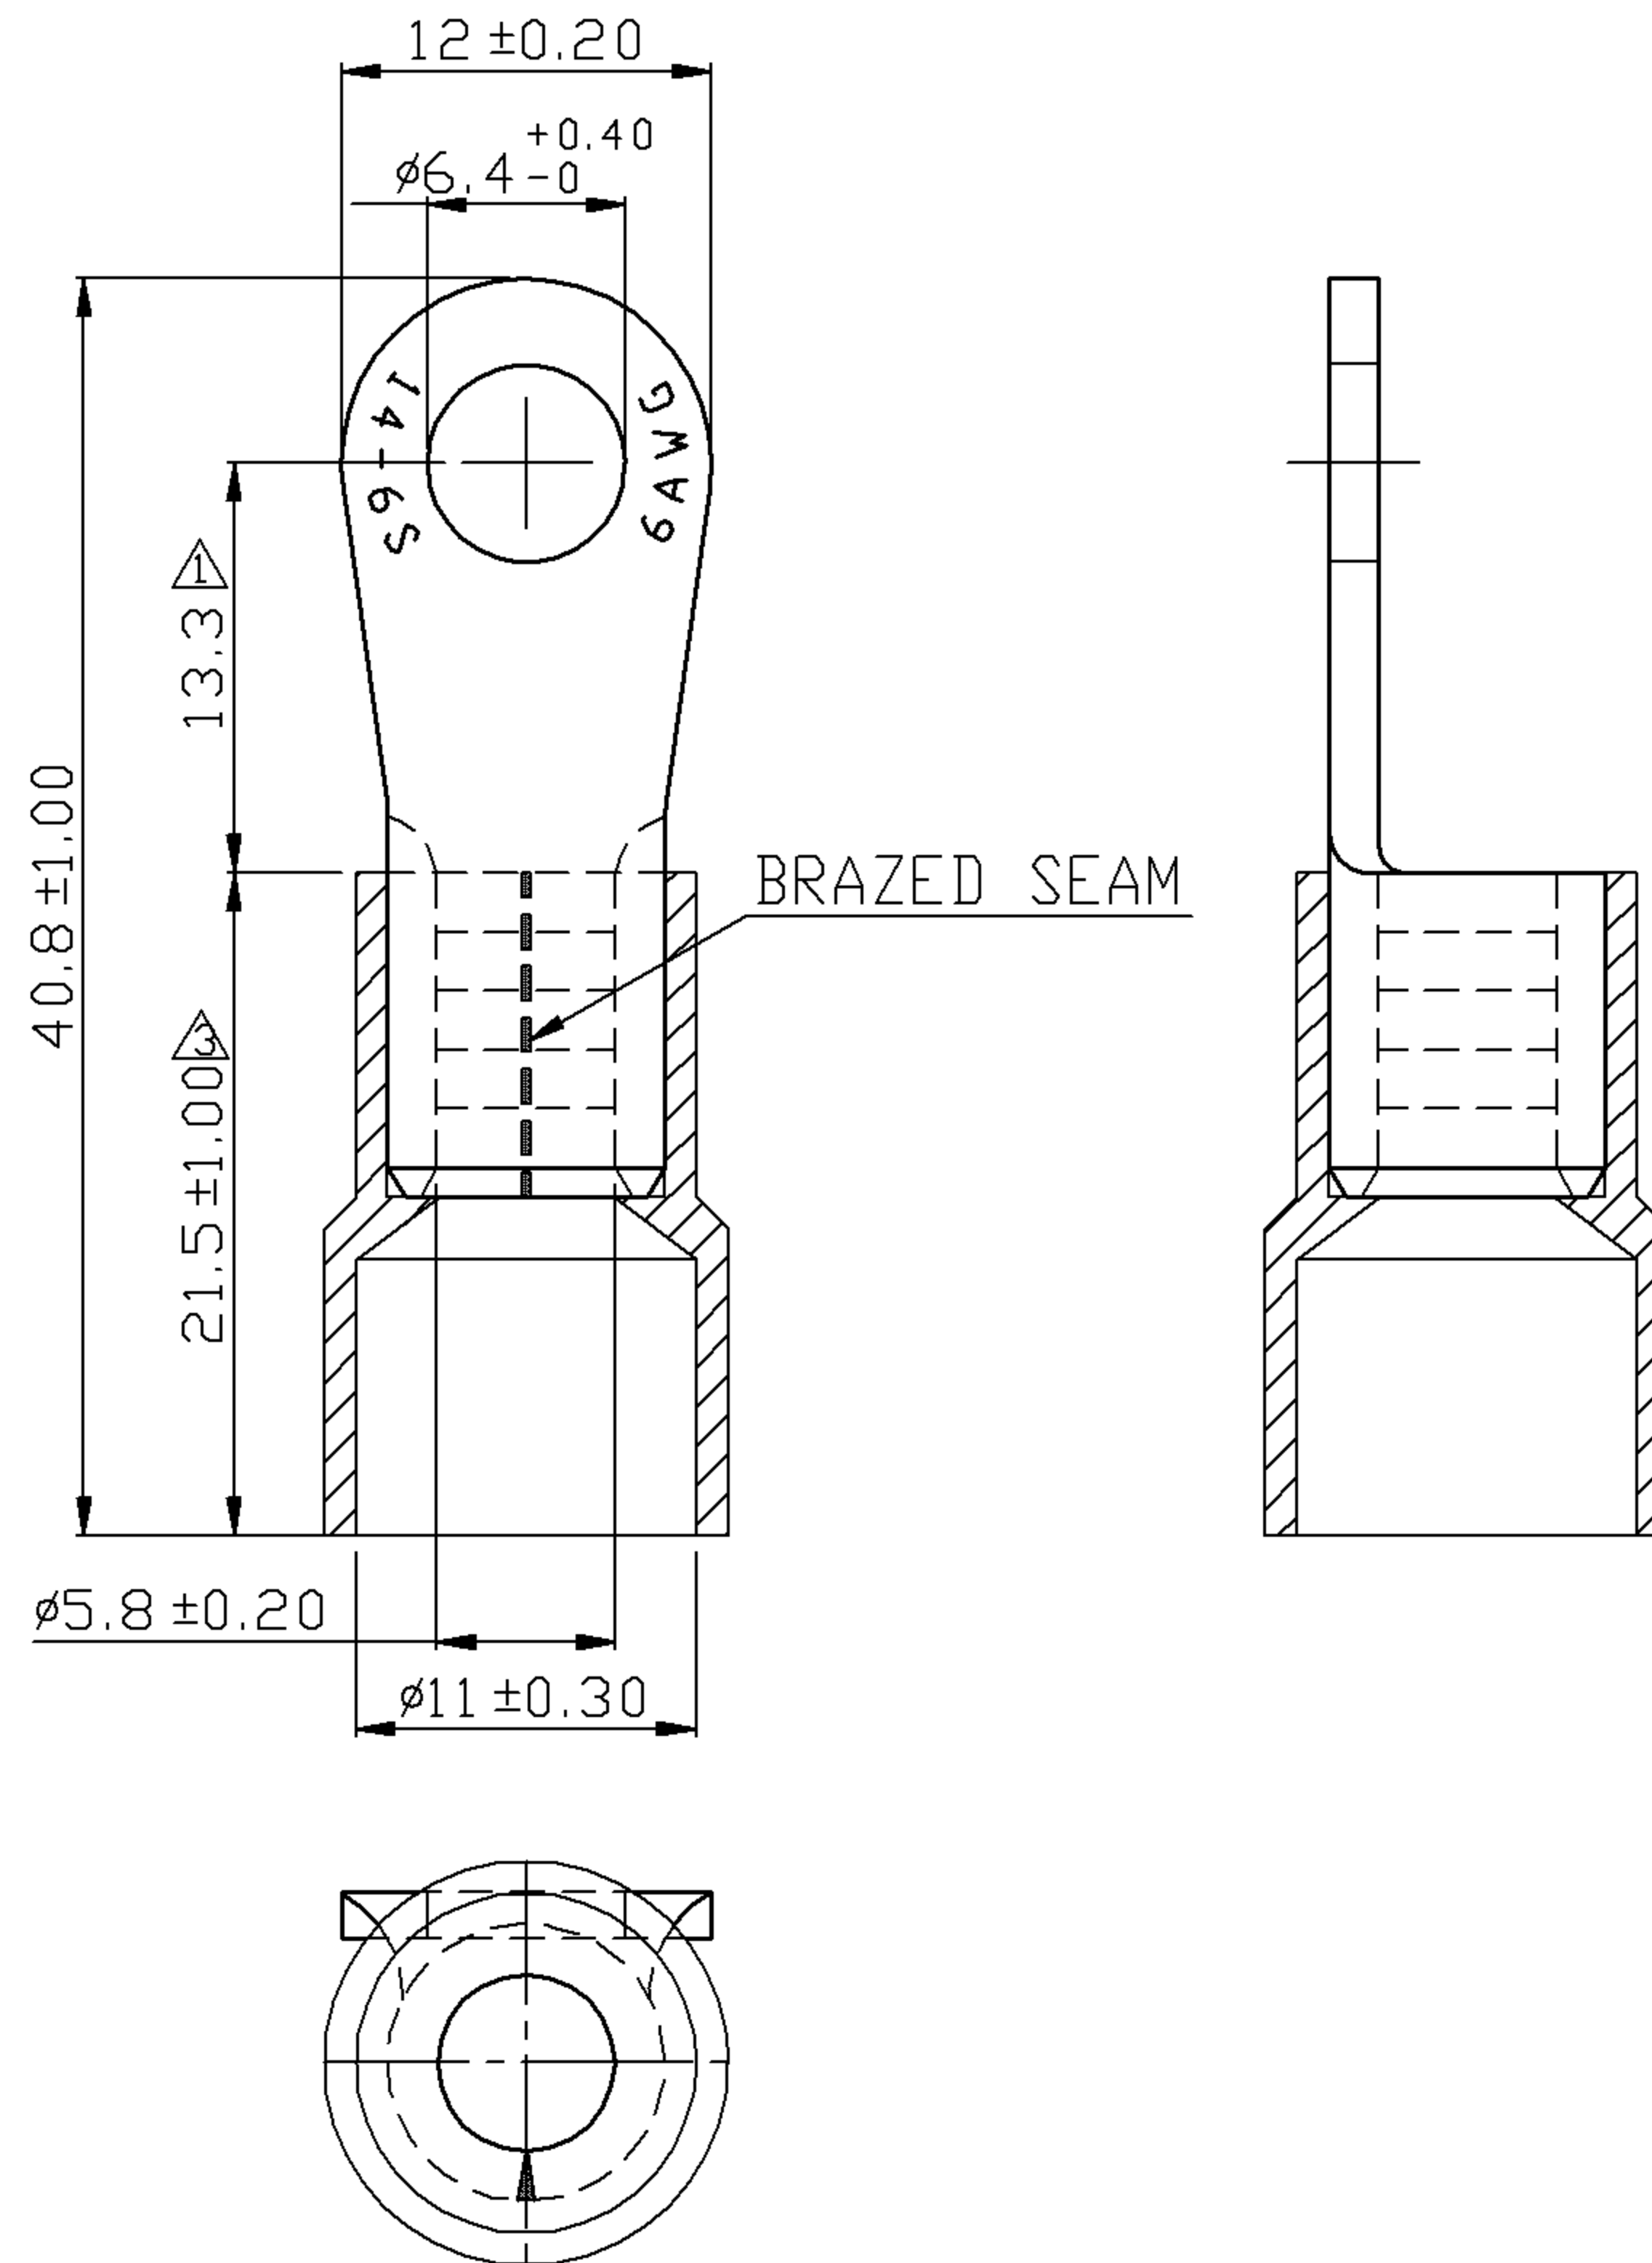

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	6		
AMP.	95		
 2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : NYLON
 4. INSULATION COLOR : BLUE
 5. TERMINAL MATERIAL : COPPER
 6. WIRE RANGE : 6 A.W.G. (14 mm²)
 7. TERMINAL SURFACE TREATMENT : TIN PLATED
 8. TERMINAL THICKNESS : 1.5 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0° >	° REF ±
>	mm ±	° >	° ±
>	mm ±	° >	° ±

NAME	NYLON-INSULATED RING TERMINALS			UNIT	mm	
PART NO.	11394	MATERIAL	-----	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2001/08/15	2/1	1-3	10F2	DRAWN	

Morris Products Inc.
53 Carey Rd. Quennsbury, NY 12804