

CONNECTORS AND ACCESSORIES

WORKING WITH LINEBRITE LED

LineBrite features an optional flexible mounting connector, optional hardwire connector, and a 48" aluminum or plastic mounting channel. With a maximum run of 164 feet and a minimum run of 20 inches, LineBrite LED is perfect for all indoor or outdoor lighting challenge.

Please consult website for installation details.




SEE OUR LINEBRITE INSTALLATION VIDEO @ WWW.GMLIGHTING.NET


CONNECTORS AND ACCESSORIES

Cat. No.	Description
120V-PC	Power connector with 2-prong polarized plug - 22"
120V-PC-6'	Power connector with 2-prong polarized plug - 72"
120V-PC-H	Hardwire power connector - 22"
120V-PC-H-6'	Hardwire power connector - 72"
120V-RC	6" tape to tape connector with pins
120V-RC-12	12" tape to tape connector with pins
120V-RC-18	18" tape to tape connector with pins
120V-SPLICE	Tape to tape direct connector with pins
120V-90	90° tape to tape connector
120V-EC	End caps - bag of 10
120V-MC	Mounting clips - bag of 10 (1 per ft. minimum)
3M-VHB-48	3M mounting tape to mount LineBrite into XD/XDF channel
120V-CHL	Aluminum mounting channel (no lens) - 39"
120V-CHL-P	Plastic mounting channel (no lens) - 39"

CONNECTOR DIAGRAMS

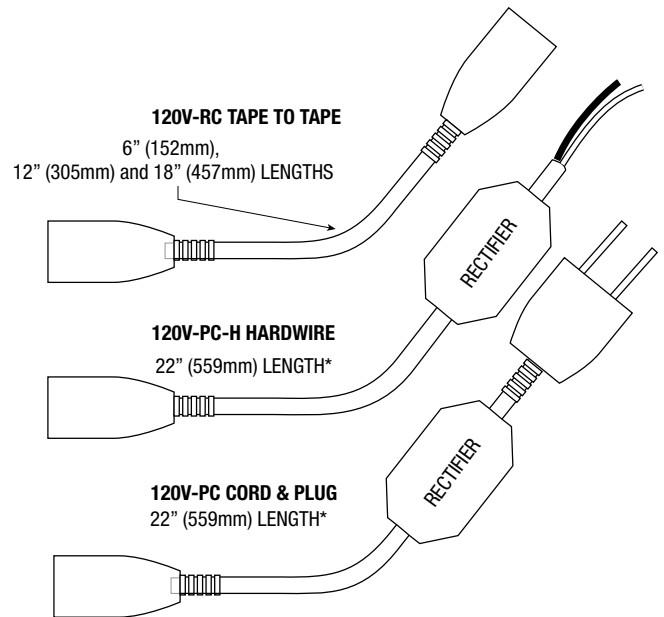

*Also available: Hardwire and Cord & Plug with 72" lead / cord. See ordering chart below left

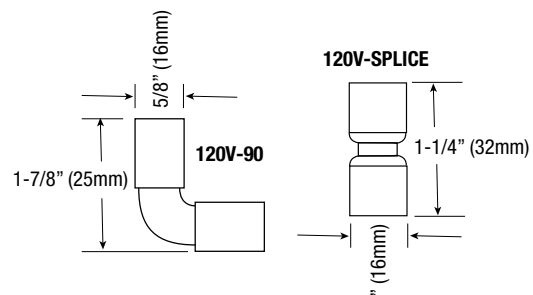

See our Custom Length Matrix on Page 43