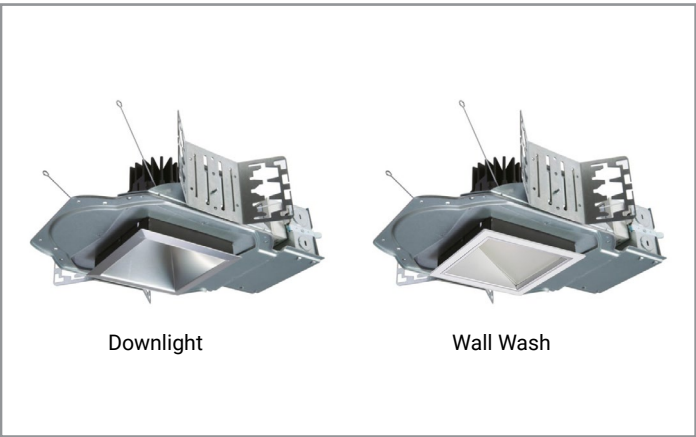


Project		Catalog #		Type	
Prepared by		Notes		Date	



Portfolio

LDSQ4C | EU4C | 4LBSQ

4" Square, New Construction Downlight and Wall Wash
250-7500 Lumens

Typical Applications

Office • Education • Healthcare • Hospitality • Retail • Code-Compliance Areas • Sports Venues

Interactive Menu

- Order Information [page 2](#)
- Product Specifications [page 4](#)
- Dimensional & Mounting Details [page 5](#)
- Energy Data [page 6](#)
- Photometric Data [page 7](#)
- Connected System [page 9](#)
- Product Warranty

Product Certification



Control Compatibility

Product Features

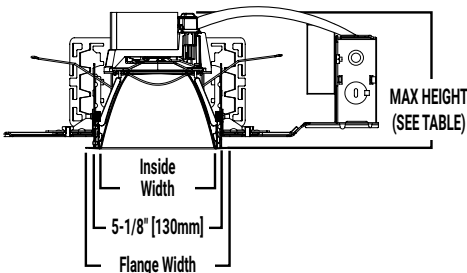
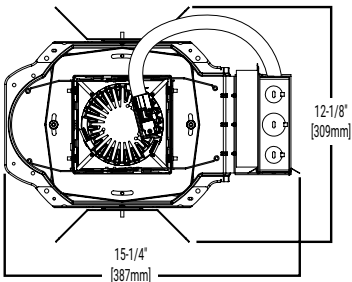


Top Product Features


- 250-7500 lumens; Offered in 90 and 97 CRI; ENERGY STAR® qualified
- Optional snap in driver for ease of replacement; Die-cast or anodized aluminum reflectors
- Standard 0-10V driver dims to 1%; Easy disconnect for LED engine replacement and installation
- 2400K, 2700K, 3000K, 3500K, 4000K, 5000K; D2W™ option from 3000K to 1850K
- Available W2N tunable white CCT range 2700K to 6500K or 2000K to 5000K

Dimensional and Mounting Details

DOWNLIGHT



WALL WASH

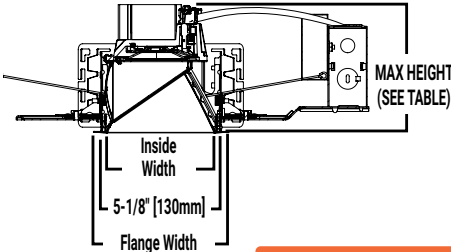

[CLICK HERE](#)
dimension information

Single Line Order Information

SAMPLE ORDER NUMBER: **LDSQ4C109030D010M1H** (all components in multiple packages in same shipment)

Invoice will indicate separate fixture components (housing, trim, module) which will ship complete from a single CLS facility in separate cartons.

To receive separate components (housing, trim, module) shipment, click on the "Multi-Line Ordering Information Option" button to the right.

Multi-line Ordering
Information Option

Housing	Lumen ⁽¹⁾			Color Control	CCT ⁽²⁰⁾	
LDSQ4C =LED Square Downlight 4" Nominal Aperture	02 = 250 lumens, IC rated	20 = 2000 Lumens	55 = 5500 Lumens ⁽¹⁰⁾	90 =90 CRI Minimum 97 =97 CRI Minimum	90 CRI	97 CRI
LDSQ4CCP =LED Square Downlight 4" Nominal Aperture, Chicago Plenum	05 = 500 lumens, IC rated	25 = 2500 lumens	60 = 6000 Lumens ⁽¹⁰⁾		24 =2400K	27 =2700K
	08 = 800 lumens, IC rated	30 = 3000 Lumens	65 = 6500 Lumens ⁽¹⁰⁾		27 =2700K	30 =3000K
	10 = 1000 Lumens	35 = 3500 lumens	70 = 7000 Lumens ⁽¹⁰⁾		30 =3000K	35 =3500K
	10IC = 1000 Lumens, IC rated	40 = 4000 Lumens	75 = 7500 Lumens ⁽¹⁰⁾		35 =3500K	40 =4000K
	15 = 1500 Lumens	45 = 4500 Lumens ⁽¹⁰⁾			40 =4000K	50 =5000K
	15IC = 1500 Lumens, IC rated	50 = 5000 Lumens ⁽¹⁰⁾				

Driver	Specify from Driver column. Information below for reference only.
	Remote driver & magnetic plug in driver
D010 =0-10V Dimming, 1% to 100%, 120V-277V up to 7000 lumens (up to 3000 lumens for remote driver) 1D010 =0-10V Dimming, 1% to 100%, 120V 7500 lumens (3500 to 7000 lumens for remote driver) 2D010 =0-10V Dimming, 1% to 100%, 277V 7500 lumens (3500 to 7000 lumens for remote driver) 3D010 =0-10V Dimming, 1% to 100%, 347V dedicated drivers for 800 to 4000 lumens; 500, 4500 and above use step down transformer (500 to 7000 lumens for remote driver)	250-7000
D010TR =0-10V Dimming, 5% to 100%, 120V-277V or 120V line voltage dimming 250- 4500 lumens (up to 3000 lumens for remote driver) 1D010TR =0-10V or line voltage Dimming, 5% to 100%, 120V 5000-7500 lumens (3500 to 4500 lumens for remote driver) 2D010TR =0-10V Dimming, 5% to 100%, 277V 5000-7500 lumens (3500 to 4500 lumens for remote driver) 3D010TR =0-10V or line voltage Dimming, 5% to 100%, 347V step down transformer 250-7500 lumens (250 to 4500 lumens for remote driver)	250-4500
DE010 =0-10V Dimming, 0% to 100%, 120V-277V 500-7000 lumens (up to 3000 lumens for remote driver) 1DE010 =0-10V Dimming, 0% to 100%, 120V 7500 lumens (3500 to 7000 lumens for remote driver) 2DE010 =0-10V Dimming, 0% to 100%, 277V 7500 lumens (3500 to 7000 lumens for remote driver) 3DE010 =0-10V Dimming, 0% to 100%, 347V step down transformer, 500-7500 lumens (500 to 7000 lumens for remote driver)	500-7000
DSLT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V-277V, 500-7000 lumens (up to 3000 lumens for remote driver) 1DSLT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V 7500 lumens (3500 to 7000 lumens for remote driver) 2DSLT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 277V 7500 lumens (3500 to 7000 lumens for remote driver) 3DSLT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100% 347V step down transformer, 500-7500 lumens (500 to 7000 lumens for remote driver)	500-7000
DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V 800-4500 lumens (up to 3000 lumens for remote driver) ⁽¹⁴⁾ 1DMX = DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, 5000-7500 lumens (3500 to 4500 lumens for remote driver) ⁽¹⁴⁾ 2DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, 5000-7500 lumens (3500 to 4500 lumens for remote driver) ⁽¹⁴⁾ 3DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 347V step down transformer, 800-7500 lumens (800 to 4500 lumens for remote driver) ⁽¹⁴⁾	800-4500
DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V, 800-4500 lumens, RJ45 Connection (up to 3000 lumens for remote driver) ⁽¹⁴⁾ 1DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, 5000-7500 lumens, RJ45 Connection (3500 to 4500 lumens for remote driver) ⁽¹⁴⁾ 2DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, 5000-7500 lumens, RJ45 Connection (3500 to 4500 lumens for remote driver) ⁽¹⁴⁾ 3DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 347V step down transformer, 800-7500 lumens, RJ45 Connection (800 to 4500 lumens for remote driver) ⁽¹⁴⁾	800-4500
DLE =Lutron Ecosystem dimming 1% to 100%, 120V-277V, 800-3500 lumens (up to 3000 lumens for remote driver) 1DLE =Lutron Ecosystem dimming 1% to 100%, 120V, 4000-7500 lumens (3500 lumens for remote driver) 2DLE =Lutron Ecosystem dimming 1% to 100%, 277V, 4000-7500 lumens (3500 lumens for remote driver) 3DLE =Lutron Ecosystem dimming 1% to 100%, 347, step down transformer, 800-7500 lumens (800-3500 lumens for remote driver)	800-3500
DLV = Low voltage dimming driver (1-100%) for use with DLVP system 800-3000 lumens ⁽³⁾	800-3000 (Remote driver only)

Driver Options	Hanger Bars
Blank = Integral driver RC100 = Remote 100ft ⁽³⁾ ⁽³³⁾ RC75 = Remote 75ft ⁽³⁾ ⁽³³⁾ RC50 = Remote 50ft ⁽³⁾ ⁽³³⁾ RC25 = Remote 25ft ⁽³⁾	Blank = Without hanger bars B26 = C-channel Bar Hanger, 26" Long, Pair
RC15 = Remote 15ft ⁽³⁾ RC5 = Remote 5ft ⁽³⁾ RC2 = Remote 2ft ⁽³⁾ PD = Magnetic Plug in Driver	

Trim Distribution ⁽⁵⁾	Trim Flange	Trim Finish	Options ⁽³⁾ ⁽¹³⁾
SQ = Medium beam 50° cutoff Anodized Aluminum SQW = Medium beam 45° cutoff Anodized Aluminum CSSQ =Cast Shallow Square, Die Cast Aluminum Wall Wash SQLWW = Lensed Wall Wash	0 =White Polymer Trim Ring ⁽³⁴⁾ 1 =Self-flanged ⁽¹³⁾ 2 =White Painted Self-flanged 4 =Knife edge rimless use with die cast only ⁽²²⁾ ⁽²³⁾	LI =Specular Clear ⁽⁹⁾ H =Semi-Specular Clear ⁽⁹⁾ WMH =Warm Haze ⁽⁹⁾ WH =Wheat ⁽⁹⁾ GPH =Graphite Haze ⁽⁹⁾ B =Specular Black ⁽⁹⁾ MW =Matte White (Antimicrobial) MB =Matte Black ⁽⁸⁾ MMS =Matte Metallic Silver ⁽⁸⁾	EMB0D =Bodine® Emergency Module with Remote Test Switch ⁽²¹⁾ EMB0D6ST =Bodine® 6W Self Test Emergency Module with Remote Test Switch EM7 =7W Emergency Module with Remote Test Switch EM14 =14W Emergency Module with Remote Test Switch EMB0D7ST =Bodine® Self Test Emergency Module ⁽²¹⁾ IEMB0D =Bodine® Emergency Module with Integral Test Switch ⁽⁶⁾ ⁽²¹⁾ IEM7 =7W Emergency Module with Integral Test Switch ⁽⁶⁾ IEM14 =14W Emergency Module with Integral Test Switch ⁽⁶⁾ EMV7 =7W Low Voltage Emergency Module with Remote Test Switch ⁽⁴⁾ EMV14 =14W Low Voltage Emergency Module with Remote Test Switch ⁽⁴⁾ ETRD =Emergency transfer device ⁽³²⁾ WPST = Factory installed WaveLinX PRO Sensor Kit ⁽¹⁵⁾ ⁽¹⁸⁾ WLST = Factory installed WaveLinX LITE Sensor Kit ⁽¹⁵⁾ ⁽¹⁷⁾ WPN = WaveLinX PRO Wireless Node without sensor ⁽¹⁹⁾ ⁽³⁶⁾ WLN = WaveLinX LITE Wireless Node without sensor ⁽³⁵⁾ ⁽³⁶⁾
PSSQMW1 =Non-Conductive Shallow (dead front), Self Flanged, White ⁽¹¹⁾ ⁽¹²⁾			

Continued on next page.

Single Line Order Information

Accessories (Sold separately) ⁽²²⁾		
LGSKT4SQIP66 =IP66 Gasket Kit PRSQ4 =Rimless Plaster Ring ⁽²⁾ RKPSQ4 =Knife Edge plaster Ring ⁽²⁴⁾ RPMSQ4MW =Rimless Millwork Ring, Matte White ⁽²⁾ RPMSQ4MB =Rimless Millwork Ring, Matte Black ⁽²⁾ RKMSQ4MW =Knife Edge Millwork Ring, Matte White ⁽²⁴⁾ RKMSQ4MB =Knife Edge Millwork Ring, Matte Black ⁽²⁴⁾	Bar Hangers HB50 =C-channel Bar Hanger, 50" Long, Pair RMB22 =Wood Joist Bar Hanger, 22" Long, Pair Connected Lighting Systems ⁽³⁾ ⁽¹⁵⁾ WPST = Field installed WaveLinX PRO Sensor Kit ⁽¹⁷⁾ WLST = Field installed WaveLinX LITE Sensor Kit ⁽¹⁸⁾	Transformers H347 =H347 for 5500 lumens and below H347200 =347 to 120V Step Down Transformer, 200VA

- Notes:**

 - 1. Nominal Lumens will vary depending on selected color, CRI, driver and reflector finish. Reference [Multiplier tables](#).
 - 2. Order trim with polymer trim ring (Consult specification sheet for color ordering information and options).
 - 3. Not available with Chicago Plenum.
 - 4. ULus listed only
 - 5. Beam angles are nominal with LI finish trims.
 - 6. Available with SQ and SQW open anodized Aluminum trims. Required for use with all IEMBOD, IEMBOD6ST, IEM7, IEM14, IEMV7 and IEMV14 housings. Not offered with remote driver.
 - 7. Only available with Matte White and Matte Black Finishes.
 - 8. Available only on CS distributions.
 - 9. Not available on PS, CS or BA distributions.
 - 10. Product is marked spacing. [Reference table on page 4](#).
 - 11. PS available in self-flanged MW finish only.
 - 12. Offered up to 2000 lumens
 - 13. Flange is the same finish as the reflector
 - 14. DMX fixtures default to full on upon loss of DMX signal.
 - 15. Refer to system specifications for additional information, features, and benefits. Order either factory installed option or accessory. Use with 0-10V driver.
- 16. Non-IC
 - 17. WLST = WaveLinX LITE tilemount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX LITE system specifications)
 - 18. WPST = WaveLinX wireless sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with 0-10V only.
 - 19. WPN = WaveLinX PRO wireless node provides luminaire level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with D010 or DE010 drivers only.
 - 21. Not available for W2N or 6500-7000 lumens with 90 and 97 CRI
 - 22. Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.
 - 23. Requires knife edge accessory ring
 - 24. Order die cast trim with flange type 4
 - 25. Not available with 6500-7000 lumens, DLVP up to 3000 lumens
 - 26. Offered with
 - D010, D5LT, DE010 up to 7000 lumens
 - D010TR, DMX up to 4500 lumens
 - DLE, DL2 up to 3500 lumens
 - 29. Order with self flanged trim.
 - 30. Offered with DLVP up to 3000 lumens
 - 31. 120V-277V
 - 32. Used to bypass local control during outage. Must be used in conjunction with UL 1008 device (provided by others)
 - 33. Not available with Lutron drivers
 - 34. Not available with CSSQ Cast Shallow Square, Die Cast Aluminum reflector
 - 35. WLN = WaveLinX LITE wireless node provides luminaire level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with D010 or DE010 drivers only.
 - 36. Not compatible with 347V or Chicago plenum.
 - 38. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analysed under domestic preference requirements. Offered with spun aluminum shallow (S) trims.

Product Specifications

Lower Shielding Reflector

- Painted die cast aluminum or anodized aluminum lower reflector with medium beam or medium beam 45° cutoff with a lensed upper optical chamber providing superior lumen output with minimal source brightness.
- Anodized reflectors are offered in all Portfolio finishes.
- Reflector is retained with two torsion springs holding the flange tight to the finished ceiling surface.
- Plaster lathing ring, knife edge and millwork ring accessory for flush reflector transition

Wall Wash Reflector

- Lensed Wall Wash** - Angle cut aluminum lower reflector in combination with spread lens provides even vertical illumination with minimal downlight.

Trim Retention

- Two torsion springs hold reflector flange tightly to the finished ceiling surface

Plaster Frame/Collar

- Galvanized steel plaster frame with adjustable collar adjusts for up to 2" thick ceilings and rotates +/- 7.5°.

Universal Mounting Bracket

- Accepts 1/2" Electric Metallic Tube (EMT), C-channel and bar hangers
- Adjusts 5" vertically from above and below the ceiling

Junction box

- Four 1/2" and two 3/4" trade size pry outs positioned to allow straight conduit runs
- Lever connectors for simple push in wiring
- Listed for (4) #12 AWG (two in, two out) 90°C conductors and feed thru branch wiring for type IC and Plug in drivers for 120/277V only. For all other cases (8) #12 AWG (four in, four out) 90°C conductors and feed thru branch wiring for 120/277V only

Thermal

- Aluminum heat sink conducts heat away from the LED module for improved performance and longer life

LED System

- Contains a plurality of high brightness white LED's combined with a high reflectance upper reflector and convex transitional lens producing even distribution without pixilation
- Auto resetting, thermally protected, LED's are turned off when safe operating temperatures are exceeded
- Quick disconnect allows for tool-less replacement of LED engine from below ceiling
- 90 and 97 CRI
- 90 & 97CRI: L78 55,000 hours for 1000-2000 lumens, L90 55,000 for all other lumen output
- Color variation within 2-step MacAdam ellipses
- Available in 2400K, 2700K, 3000K, 3500K, 4000K and 5000K correlated color temperature (CCT)

Vividtune and High CRI

- 98 CRI and W2N: L70 55,000 hours
- D2W™ – dim-to-warm shifts CCT from 3000K to 1850K as fixture dims mimicking halogen sources.
- W2N - Tunable white CCT range 2700K to 6500K or 2000K to 5000K, 90 CRI. Standard
- 98 CRI** With a full-spectrum approach using broad-blue chip technology and special phosphor blends, Thrive is able to closely match the spectrum of the sun across all color temperatures. Benefits of the natural spectrum of the sun using Thrive include superior accurate color rendering, reduced eye strain, and a higher sense of emotional well-being.
- See dedicated specification sheet for more details.

Driver

- Standard 120-277V 0-10V dimming driver provides flicker free dimming from 100% to 1%
- Optional 120V leading edge/0-10V, <1% 0-10V, Fifth Light, DMX or Lutron® Ecosystem
- Driver can be serviced from above or through the aperture
- Distributed low voltage power system combines power, lighting, and controls with ease of installation.
- Optional magnetically guided snap in driver for ease of maintenance.

Emergency Option

- Provides 90 minutes of standby lighting, meeting most life safety codes for egress lighting
- Available with integral or remote charge indicator and test switch
- Available Self-Test with remote charge indicator and test switch
- Emergency transfer device (ETRD) senses the loss of power regardless of local control settings allowing emergency power to the fixture.
- UL 924 listed

Connected Lighting System

Two WaveLinx connected solutions to choose from. Refer to WaveLinx system specifications and application guides for details.

WaveLinx PRO Tilemount Sensor Kit

- WaveLinx PRO WPST tilemount sensor kit offers daylight dimming, PIR motion sensing, scene and zone configuration, automatic commissioning; and optional RLTS - Real Time Location Services available.

WaveLinx PRO Wireless Node

- WaveLinx PRO WPN wireless node provides luminaire-level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only. **Note:** Not compatible with 347V or Chicago plenum.

WaveLinx LITE Tilemount Sensor Kit

- WaveLinx LITE WLST tilemount sensor kit offers daylight dimming and PIR motion sensing, scene and grouping configuration.

WaveLinx LITE Wireless Node

- WaveLinx LITE WLN wireless node provides luminaire level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only. **Note:** Not compatible with 347V or Chicago plenum.

WaveLinx Tilemount Kits Application

- The WPST and WLST tilemount kits include a control module mounted on the luminaire junction box via 1/2" knock-out, and a tilemount sensor on 54-inch whip; for ceiling installation by direct-mount spring clips or via mounting bracket in octagon ceiling boxes.
- The WPST and WLST tilemount kits may be ordered as factory installed on the luminaire, or ordered separately as a field installed accessory kit.
- Note: WaveLinx PRO devices are only compatible with the WaveLinx PRO system.**
- Note: WaveLinx LITE devices are only compatible with the WaveLinx LITE system.**

Code Compliance

- Thermally protected
- cULus Certified to UL 1598 / C22.2 No. 250.0 suitable for wet locations with downlight; damp location with wall wash and hyperbolic with covered ceiling
- IP66 rated when used with IP66 gasket kit accessory
- Use IP66 gasket with non conductive reflector for steam room applications up to 2000 lumens and 40°C.
- Optional City of Chicago environmental air (CCEA) marking for plenum applications
- FCC CFR Title 47 Part 15 Class B at 120VAC and Class A at 277VA
- Insulated ceiling (IC) rated up to 1,500 lumens (90 and 97CRI). All others are non-IC rated (insulation must be kept 3" from top and sides of housing).
- Can be used for State of California Title 24 high efficacy LED compliance under JA8, reference Modernized Appliance Efficiency Database System (MAEDBS) for 2016 JA8 High Efficacy Lighting
- RoHS compliant
- Photometric testing completed in accordance with IES LM-79
- LED life testing completed in accordance with IES LM-80-08 and TM-21-11 standards
- See table on page 3 for marked spacing requirements.

Warranty


- Five year warranty www.cooperlighting.com/legal

Marked Spacing




4-inch Marked spacing for 90 and 97 CRI			
4000	36	36	0.5
4000-7500 (Lutron)	36	36	8
4500-7500	36	36	8

Dimensional and Mounting Details

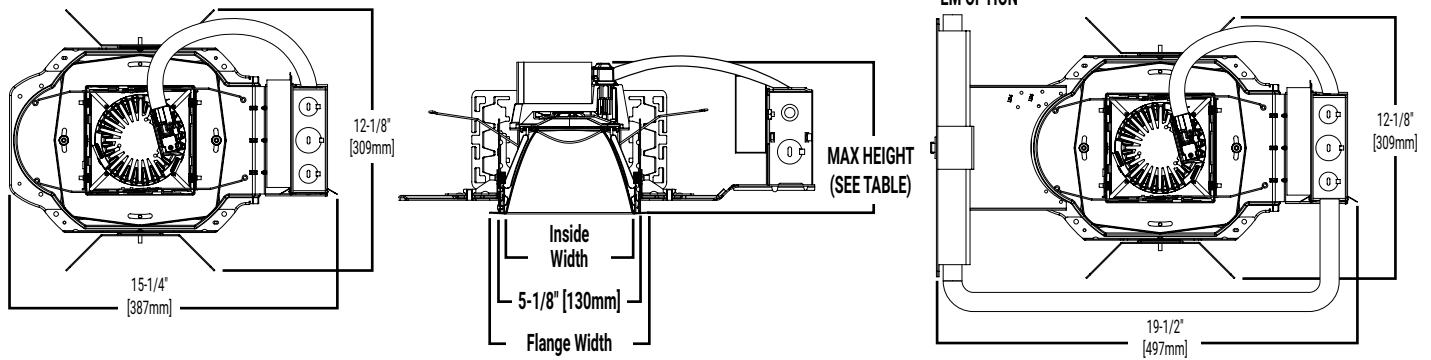DOWNLIGHT



WALL WASH

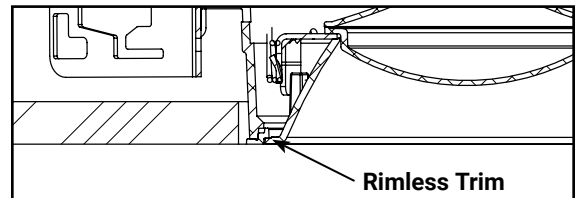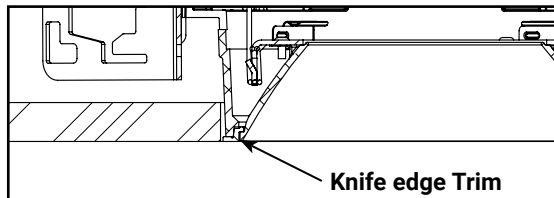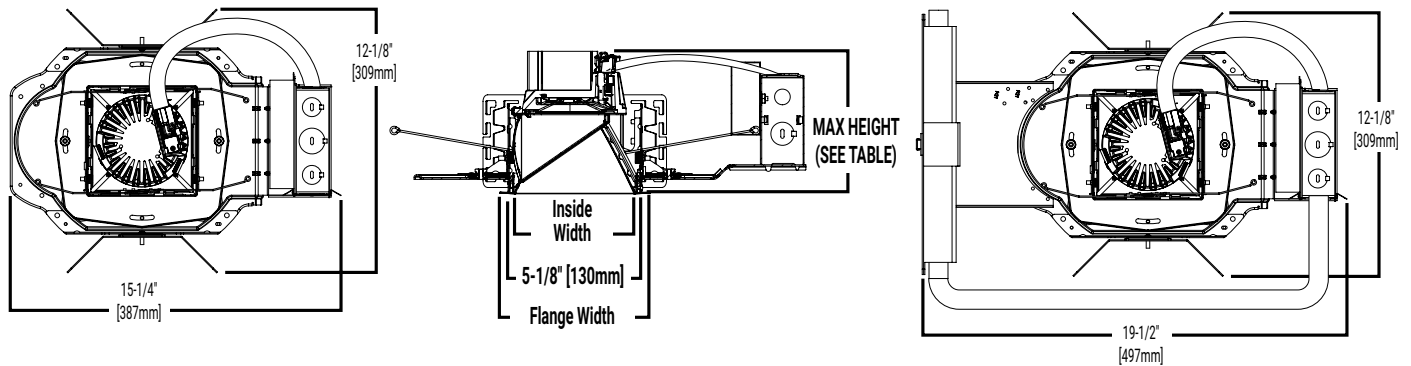

CATALOG #	Flange DIAMETER or WIDTH [IN]	INSIDE DIAMETER or WIDTH [IN]	MAX HEIGHT				
			250-2000 LUMENS (90/97CRI)	2500-4000 LUMENS (90/97CRI)	4500-6000 LUMENS (90/97CRI)	1000-1500IC LUMENS (90/97CRI) 6500-7000 LUMENS (90/97CRI)	2 LEDs 4500-7500 LUMENS (90/97CRI)
4LBSQ	5.68	4.48	5.6	5.6	5.8	6.3	8.3
4LBCSSQ	5.66	4.48	5.6	5.6	5.6	5.6	6.4
4LBSQW	5.68	4.1	5.8	6	6.4	6.9	8.9
4LBSQLWW	5.68	4.5	5.6	5.6	5.7	6.2	8.2

Energy and Performance Data

D010 DRIVER ENERGY DATA

Series	250 lumen		500 lumen		800 lumen		1000 lumen		1500 lumen		2000 lumen	
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V
Input Current (A)	0.029	0.017	0.061	0.032	0.085	0.041	0.084	0.042	0.135	0.063	0.189	0.084
Input Power (W)	3.45	3.87	7.33	7.78	10.15	10.52	10.04	10.43	16.17	16.56	22.58	22.63
In-rush (A)	2.1	8.5	3.7	8.5	3.6	8.3	3.6	8.4	2.3	9.5	2.1	9.7
Inrush duration (μs)	250	131	190	136	220	135	226	136	230	125	243	132
THDi (%)	7.21	16.92	7.82	10.78	5.57	9.63	7.78	9.24	4.75	9.93	8.03	7.44
PF	≥ 0.98	≥ 0.9	≥ 0.99	≥ 0.93	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.94	≥ 0.99	≥ 0.96

Series	2500 lumen		3000 lumen		3500 lumen		4000 lumen		4500 lumen		5000 lumen	
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V
Input Current (A)	0.276	0.121	0.276	0.121	0.333	0.152	0.404	0.181	0.421	0.192	0.491	0.216
Input Power (W)	32.98	32.57	32	32.57	39.83	39.84	48.38	47.94	50.22	50.17	58.69	58.01
In-rush (A)	2.5	11.8	3.6	11.8	3.1	14.3	3.1	14.5	5.6	22.6	5.6	22.6
Inrush duration (μs)	215	111	220	111	200	94	197	95	215	120	213	135
THDi (%)	9.86	6.57	5.57	6.57	4.25	10.05	5.02	7.97	6.12	8.35	8.51	7.92
PF	≥ 0.99	≥ 0.97	≥ 0.99	≥ 0.99	≥ 0.99	≥ 0.94	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.96

Series	5500 lumen		6000 lumen		6500 lumen		7000 lumen		7500 lumen	
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V
Input Current (A)	0.526	0.231	0.542	0.256	0.572	0.266	0.632	0.292	0.668	0.306
Input Power (W)	62.97	61.97	64.88	65.7	68.35	69.02	75.56	75.85	79.89	80.09
In-rush (A)	5.1	23.1	6.2	27.5	6.3	28.4	6.4	29.1	6.4	28.7
Inrush duration (μs)	217	138	188	101	189	92	187	90	185	100
THDi (%)	9.42	7.16	4.33	11.86	4.38	11.33	4.84	10.32	4.46	9.85
PF	≥ 0.99	≥ 0.96	≥ 0.99	≥ 0.93	≥ 0.99	≥ 0.93	≥ 0.99	≥ 0.94	≥ 0.99	≥ 0.94

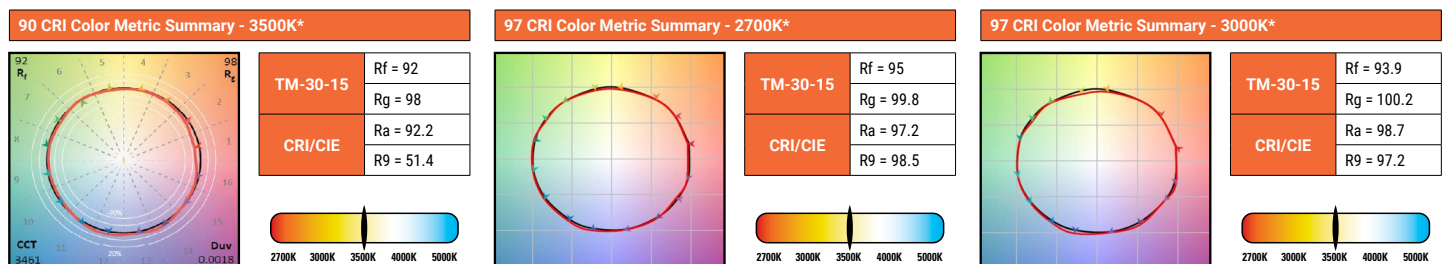
Minimum starting temperature -30°C (-22°F)*
(Nominal input 120-277VAC & 100% of rated output power)

Sound Rating: Class A standards

Notes:

Emergency Battery packs are rated for a minimum starting temperature of 0°C.



COLOR METRICS - TM-30-15 & CRI/CIE









* Color values are based on haze reflector, other finishes and field results may vary.



Photometric Data

 View IES files

NON CONDUCTIVE		CANDLEPOWER DISTRIBUTION				CONE OF LIGHT				CANDELA TABLE		ZONAL LUMEN SUMMARY			LUMINANCE																									
Test Number	P571650	Downlight								Degrees Vertical	Candela	Zone	Lumens	% Fixture	Average Candela Degrees	Average 0° Luminance																								
Housing	LDSQ4C15D010					<table><tr><th>D</th><th>FC</th><th>L</th><th>W</th></tr><tr><td>4'</td><td>45.4</td><td>4.6</td><td>4.6</td></tr><tr><td>7'</td><td>14.8</td><td>8.2</td><td>8.2</td></tr><tr><td>9'</td><td>9</td><td>10.6</td><td>10.6</td></tr><tr><td>13'</td><td>4.3</td><td>15.4</td><td>15.4</td></tr><tr><td>16'</td><td>2.8</td><td>18.8</td><td>19</td></tr></table>				D	FC	L	W	4'	45.4	4.6	4.6	7'	14.8	8.2	8.2	9'	9	10.6	10.6	13'	4.3	15.4	15.4	16'	2.8	18.8	19	0	720	0-30	545	35.5	37	61218
D	FC									L	W																													
4'	45.4									4.6	4.6																													
7'	14.8									8.2	8.2																													
9'	9									10.6	10.6																													
13'	4.3	15.4	15.4																																					
16'	2.8	18.8	19																																					
Module	EU4C10209035	5	705	0-40	876	57	45	55920																																
Trim	4LBPSSQMW	15	678	0-60	1425	92.7	55	39886																																
Lumens	1537	25	526	0-90	1537	100	65	17740																																
Efficacy	97.3 Lm/W	35	410	90-180	0	0	75	746																																
SC	1.2					65	78	0-180	1537	100	85	0																												
UGR	24.8					75	2	85	0	90	0																													



MEDIUM/WIDE 65° BEAM (H)		CANDLEPOWER DISTRIBUTION				CONE OF LIGHT				CANDELA TABLE		ZONAL LUMEN SUMMARY			LUMINANCE																									
Test Number	P571651	Downlight								Degrees Vertical	Candela	Zone	Lumens	% Fixture	Average Candela Degrees	Average 0° Luminance																								
Housing	LDSQ4C15D010					<table><tr><th>D</th><th>FC</th><th>L</th><th>W</th></tr><tr><td>4'</td><td>77.3</td><td>3.6</td><td>3.6</td></tr><tr><td>7'</td><td>25.2</td><td>6.6</td><td>6.6</td></tr><tr><td>9'</td><td>15.3</td><td>8.4</td><td>8.4</td></tr><tr><td>13'</td><td>7.3</td><td>12.2</td><td>12.2</td></tr><tr><td>16'</td><td>4.8</td><td>15</td><td>15</td></tr></table>				D	FC	L	W	4'	77.3	3.6	3.6	7'	25.2	6.6	6.6	9'	15.3	8.4	8.4	13'	7.3	12.2	12.2	16'	4.8	15	15	0	1236	0-30	796	63.8	37	46109
D	FC									L	W																													
4'	77.3									3.6	3.6																													
7'	25.2									6.6	6.6																													
9'	15.3									8.4	8.4																													
13'	7.3	12.2	12.2																																					
16'	4.8	15	15																																					
Module	EU4C10209035	5	1214	0-40	1084	87	45	19513																																
Trim	4LBSQH	15	1065	0-60	1233	98.9	55	5703																																
Lumens	1247	25	847	0-90	1247	100	65	2146																																
Efficacy	78.9 Lm/W	35	463	90-180	0	0	75	708																																
SC	0.95					65	9	0-180	1247	100	85	0																												
UGR	11.3					75	2	85	0	90	0																													



MEDIUM/WIDE 65° BEAM		CANDLEPOWER DISTRIBUTION				CONE OF LIGHT				CANDELA TABLE		ZONAL LUMEN SUMMARY			LUMINANCE																									
Test Number	P571652	Downlight								Degrees Vertical	Candela	Zone	Lumens	% Fixture	Average Candela Degrees	Average 0° Luminance																								
Housing	LDSQ4C15D010					<table><tr><th>D</th><th>FC</th><th>L</th><th>W</th></tr><tr><td>4'</td><td>100.6</td><td>3.6</td><td>3.6</td></tr><tr><td>7'</td><td>32.9</td><td>6.2</td><td>6.2</td></tr><tr><td>9'</td><td>19.9</td><td>8</td><td>8</td></tr><tr><td>13'</td><td>9.5</td><td>11.6</td><td>11.6</td></tr><tr><td>16'</td><td>6.3</td><td>14.4</td><td>14.4</td></tr></table>				D	FC	L	W	4'	100.6	3.6	3.6	7'	32.9	6.2	6.2	9'	19.9	8	8	13'	9.5	11.6	11.6	16'	6.3	14.4	14.4	0	1607	0-30	1017	68.5	37	42636
D	FC									L	W																													
4'	100.6									3.6	3.6																													
7'	32.9									6.2	6.2																													
9'	19.9									8	8																													
13'	9.5	11.6	11.6																																					
16'	6.3	14.4	14.4																																					
Module	EU4C10209035	5	1583	0-40	1350	91	45	13523																																
Trim	4LBSQLI	15	1393	0-60	1477	99.5	55	2406																																
Lumens	1484	25	1039	0-90	1484	100	65	936																																
Efficacy	93.9 Lm/W	35	449	90-180	0	0	75	373																																
SC	0.9					65	4	0-180	1484	100	85	0																												
UGR	5.2					75	1	85	0	90	0																													




LENSED WALL WASH (H)		CANDLEPOWER DISTRIBUTION				CONE OF LIGHT				CANDELA TABLE		ZONAL LUMEN SUMMARY			LUMINANCE																									
Test Number	P571653	Downlight								Degrees Vertical	Candela	Zone	Lumens	% Fixture	Average Candela Degrees	Average 0° Luminance																								
Housing	LDSQ4C15D010					<table><tr><th>D</th><th>FC</th><th>L</th><th>W</th></tr><tr><td>4'</td><td>48.2</td><td>3.6</td><td>3.8</td></tr><tr><td>7'</td><td>15.8</td><td>6.5</td><td>6.8</td></tr><tr><td>9'</td><td>9.5</td><td>8.3</td><td>8.8</td></tr><tr><td>13'</td><td>4.6</td><td>12</td><td>12.6</td></tr><tr><td>16'</td><td>3</td><td>14.8</td><td>15.6</td></tr></table>				D	FC	L	W	4'	48.2	3.6	3.8	7'	15.8	6.5	6.8	9'	9.5	8.3	8.8	13'	4.6	12	12.6	16'	3	14.8	15.6	0	716	0-30	489	47.7	37	46123
D	FC									L	W																													
4'	48.2									3.6	3.8																													
7'	15.8									6.5	6.8																													
9'	9.5									8.3	8.8																													
13'	4.6	12	12.6																																					
16'	3	14.8	15.6																																					
Module	EU4C10209035	5	755	0-40	719	70	45	35056																																
Trim	4LBSQLWWH	15	746	0-60	965	93.9	55	29187																																
Lumens	1027	25	631	0-90	1027	100	65	27055																																
Efficacy	65 Lm/W	35	424	90-180	0	0	75	19870																																
SC	1					65	118	0-180	1027	100	85	0																												
UGR	26.9					75	53	85	0	90	0																													

Photometric Data

[View IES files](#)

LENSED WALL WASH (LI)		CANDLEPOWER DISTRIBUTION		CONE OF LIGHT		CANDELA TABLE		ZONAL LUMEN SUMMARY			LUMINANCE																									
Test Number	P571654	Downlight				Degrees Vertical	Candela	Zone	Lumens	% Fixture	Average Candela Degrees	Average 0° Luminance																								
Housing	LDSQ4C15D010			<table><tr><th>D</th><th>FC</th><th>L</th><th>W</th></tr><tr><td>4'</td><td>57.4</td><td>3.6</td><td>3.8</td></tr><tr><td>7'</td><td>18.7</td><td>6.5</td><td>6.8</td></tr><tr><td>9'</td><td>11.3</td><td>8.3</td><td>8.8</td></tr><tr><td>13'</td><td>5.4</td><td>12</td><td>12.6</td></tr><tr><td>16'</td><td>3.6</td><td>14.8</td><td>15.6</td></tr></table>		D	FC	L	W	4'	57.4	3.6	3.8	7'	18.7	6.5	6.8	9'	11.3	8.3	8.8	13'	5.4	12	12.6	16'	3.6	14.8	15.6	0	852	0-30	582	47.7	37	54885
D	FC	L	W																																	
4'	57.4	3.6	3.8																																	
7'	18.7	6.5	6.8																																	
9'	11.3	8.3	8.8																																	
13'	5.4	12	12.6																																	
16'	3.6	14.8	15.6																																	
Module	EU4C10209035					5	898	0-40	855	70	45	41701																								
Trim	4LBSQLWWLI					15	887	0-60	1148	93.9	55	34738																								
Lumens	1222					25	751	0-90	1222	100	65	32192																								
Efficacy	77.3 Lm/W					35	505	90-180	0	0	75	23636																								
SC	1					45	306	0-180	1222	100	85	0																								
UGR	27.5					55	206																													
						65	141																													
						75	63																													
						85	0																													
						90	0																													

MEDIUM/WIDE 45° CUTOFF 60° BEAM (H)		CANDLEPOWER DISTRIBUTION		CONE OF LIGHT		CANDELA TABLE		ZONAL LUMEN SUMMARY			LUMINANCE																									
Test Number	P571655	Downlight				Degrees Vertical	Candela	Zone	Lumens	% Fixture	Average Candela Degrees	Average 0° Luminance																								
Housing	LDSQ4C15D010			<table><tr><th>D</th><th>FC</th><th>L</th><th>W</th></tr><tr><td>4'</td><td>61.1</td><td>3.6</td><td>3.6</td></tr><tr><td>7'</td><td>20</td><td>6.4</td><td>6.4</td></tr><tr><td>9'</td><td>12.1</td><td>8.2</td><td>8.2</td></tr><tr><td>13'</td><td>5.8</td><td>12</td><td>12</td></tr><tr><td>16'</td><td>3.8</td><td>14.8</td><td>14.8</td></tr></table>		D	FC	L	W	4'	61.1	3.6	3.6	7'	20	6.4	6.4	9'	12.1	8.2	8.2	13'	5.8	12	12	16'	3.8	14.8	14.8	0	978	0-30	649	62.7	37	32299
D	FC	L	W																																	
4'	61.1	3.6	3.6																																	
7'	20	6.4	6.4																																	
9'	12.1	8.2	8.2																																	
13'	5.8	12	12																																	
16'	3.8	14.8	14.8																																	
Module	EU4C10209035					5	965	0-40	857	82.8	45	21751																								
Trim	4LBSQWH					15	890	0-60	1012	97.8	55	9656																								
Lumens	1035					25	650	0-90	1035	100	65	4429																								
Efficacy	65.5 Lm/W					35	302	90-180	0	0	75	1939																								
SC	0.93					45	159	0-180	1035	100	85	996																								
UGR	14.9					55	57																													
						65	19																													
						75	5																													
						85	1																													
						90	0																													

MEDIUM/WIDE 45° CUTOFF 55° BEAM (LI)		CANDLEPOWER DISTRIBUTION		CONE OF LIGHT		CANDELA TABLE		ZONAL LUMEN SUMMARY			LUMINANCE																									
Test Number	P571656	Downlight				Degrees Vertical	Candela	Zone	Lumens	% Fixture	Average Candela Degrees	Average 0° Luminance																								
Housing	LDSQ4C15D010			<table><tr><th>D</th><th>FC</th><th>L</th><th>W</th></tr><tr><td>4'</td><td>83.9</td><td>3.6</td><td>3.6</td></tr><tr><td>7'</td><td>27.4</td><td>6.4</td><td>6.2</td></tr><tr><td>9'</td><td>16.6</td><td>8.2</td><td>8</td></tr><tr><td>13'</td><td>7.9</td><td>11.8</td><td>11.8</td></tr><tr><td>16'</td><td>5.2</td><td>14.6</td><td>14.4</td></tr></table>		D	FC	L	W	4'	83.9	3.6	3.6	7'	27.4	6.4	6.2	9'	16.6	8.2	8	13'	7.9	11.8	11.8	16'	5.2	14.6	14.4	0	1343	0-30	882	73.4	37	32072
D	FC	L	W																																	
4'	83.9	3.6	3.6																																	
7'	27.4	6.4	6.2																																	
9'	16.6	8.2	8																																	
13'	7.9	11.8	11.8																																	
16'	5.2	14.6	14.4																																	
Module	EU4C10209035					5	1339	0-40	1115	92.7	45	11954																								
Trim	4LBSQWLI					15	1240	0-60	1197	99.6	55	1665																								
Lumens	1202					25	866	0-90	1202	100	65	776																								
Efficacy	76.1 Lm/W					35	323	90-180	0	0	75	447																								
SC	0.91					45	88	0-180	1202	100	85	332																								
UGR	3.7					55	10																													
						65	3																													
						75	1																													
						85	0																													
						90	0																													

Photometric Multipliers (Nominal Lumen Values)

250 Lumen	500 Lumen	800 Lumen	1000 Lumen	1500 Lumen	2000 Lumen	2500 Lumen	3000 Lumen	3500 Lumen
0.22	0.42	0.57	0.65	1.00	1.29	1.62	1.90	2.25

4000 Lumen	4500 Lumen	5000 Lumen	5500 Lumen	6000 Lumen	6500 Lumen	7000 Lumen	7500 Lumen
2.61	3.02	3.42	3.82	4.13	4.32	4.54	5.34

Multipliers for relative lumen values with other series models.

CCT Multipliers – 90CRI

2400K	2700K	3000K	3500K	4000K	5000K
0.912	0.949	0.986	1	1.001	1.022

Multipliers for relative lumen values with other series color temperatures.

CCT Multipliers – 97CRI

2700K	3000K	3500K	4000K	5000K
0.889	0.955	1	1.016	1.07

Multipliers for relative lumen values with other series color temperatures.

Color Finish Multipliers

Finish code	LI	H	WMH	WH	GPH	B	MW
Finish	Specular Clear	Semi-Specular Clear	Warm Haze	Wheat	Graphite Haze	Specular Black	Matte White
Multiplier	1.26	1.0	1.06	1.11	0.83	0.62	1.11

Multipliers for relative lumen values with other color finishes.

The diagram illustrates the WaveLinx Lite Mobile Application at the top, connected via Bluetooth (indicated by dashed orange lines and Bluetooth icons) to four different devices below:

- WaveLinx Lite Integrated Ambient:** Represented by a square icon with a horizontal line.
- WaveLinx Lite Tilemount Sensor Kit:** Represented by a circular icon with a sensor component.
- WaveLinx Lite Wallstation:** Represented by a rectangular icon with horizontal lines.
- WaveLinx Lite Integrated Parking Garage:** Represented by an icon of a parking structure.

- The diagram illustrates the integration of four key components into a unified lighting control system:

 - Downlights with timelount sensor wireless communication:** Highly efficient LED fixtures.
 - WaveLinx Area Controller:** Provides centralized coordination of multiple area control options.
 - Wireless Wall Station/Receptacle:** Provides customized wireless control of each area.
 - Mobile Applications:** Provides personalized, local control from a tablet or smartphone.

The diagram displays eight smart lighting control features arranged in two rows of four. Each feature is represented by an icon and a label:

- Manual Dimmer:** Icon of a hand adjusting a dimmer switch.
- Occupancy Sensor:** Icon of a person walking with a sensor wave.
- Lumen Maintenance Control:** Icon of a sun with horizontal lines below it.
- Daylighting Control:** Icon of a sun with rays.
- Receptacle Control:** Icon of a two-prong electrical plug.
- Tuning Control:** Icon of a tuning fork.
- Scheduling:** Icon of a clock face.
- Manually Switched ON/OFF:** Icon of a lit light bulb.
- Demand Response:** Icon of a server rack with three units.

120-277 VAC

Black (Hot) → **Control module (MSP31VMVDC1EP)**

White (Neutral) → **Control module (MSP31VMVDC1EP)**

Control module (MSP31VMVDC1EP) outputs:

- Pink (Dimming) → **0-10V Dimming Driver**
- Purple (Dimming) → **0-10V Dimming Driver**
- Blue (Not Switched) → **0-10V Dimming Driver**
- White (Neutral) → **0-10V Dimming Driver**

0-10V Dimming Driver outputs:

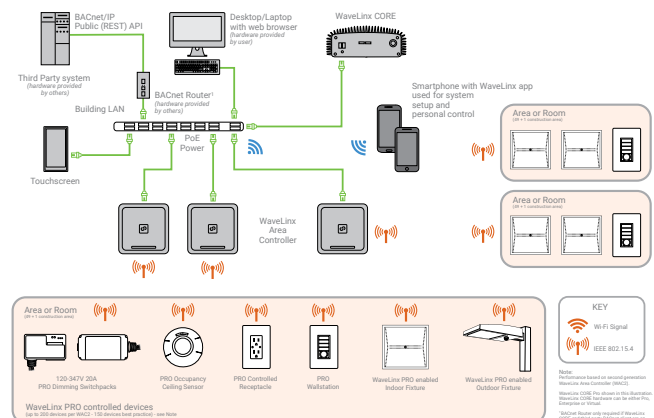
- 0-10V Dimming Signal → **WaveLinx Lite Tilemount Sensor Kit control module (MSP31VMVDC1EP) (included)**

WaveLinx Lite Tilemount Sensor Kit control module (MSP31VMVDC1EP) (included) is connected to a **54" Plenum cable (5140-000123-00) (included)**.

The **54" Plenum cable** is connected to the **WaveLinx Sensor and Mounting Trim (included)**.

The **WaveLinx Sensor and Mounting Trim** is connected to the **120-277 VAC 3A downlights with 0-10V control**.

Includes switchleg (Blue load out wire) and 0-10V to each fixture controlled



Connected Solutions



WaveLinX LITE Wireless Node - WLN

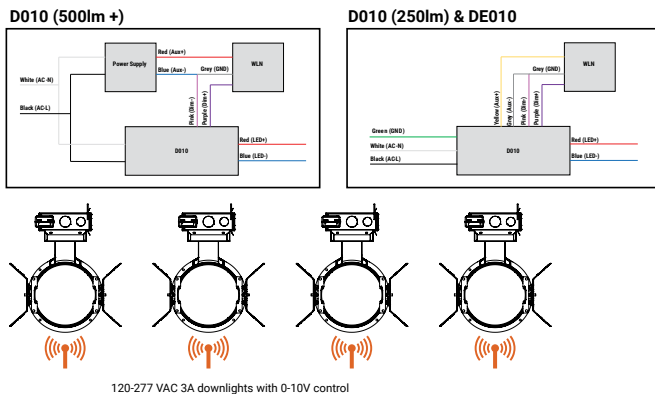
WaveLinX LITE devices only compatible with the WaveLinX LITE system.

- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per project site (WaveLinX LITE Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Refer to the WaveLinX system specifications for details
- Not available with BioUp or Tunable White


WaveLinX mobile app settings



WaveLinX LITE Wireless Node (WLN) Wiring Diagram



WaveLinX LITE Bluetooth Enabled System

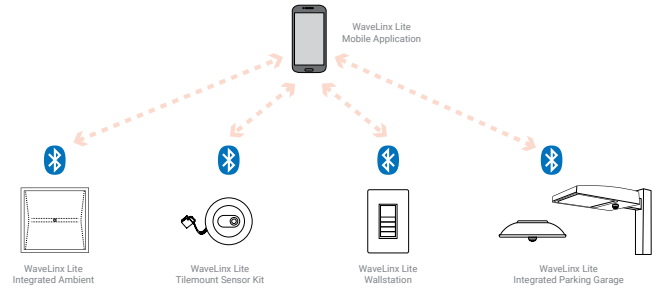


WaveLinX PRO Wireless Node - WPN

WaveLinX PRO devices only compatible with the WaveLinX PRO system.


- WaveLinX Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with WaveLinX Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations



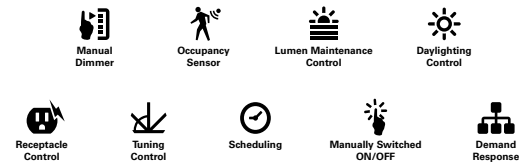
WaveLinX mobile app settings



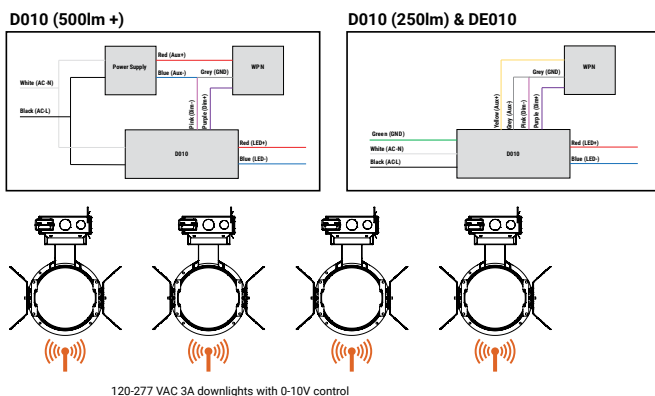WaveLinX PRO Wireless Node (WPN) Wiring Diagram



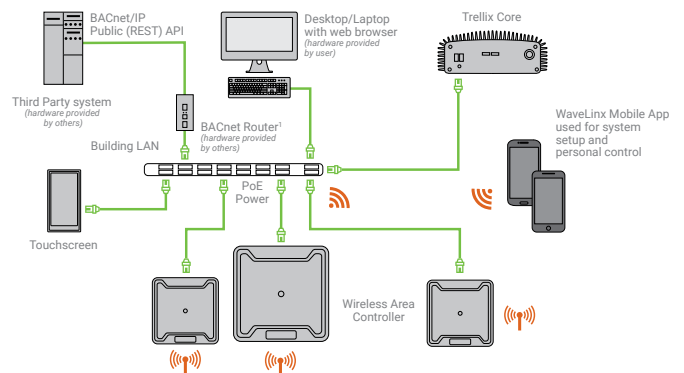WaveLinX CORE Building Management Integration



Multi-line Order Information

SAMPLE ORDER NUMBER: **LDSQ4C10D010TRIEM14** (All components may ship separately)

Invoice will indicate separate fixture components (housing, trim, module) and may ship from multiple CLS facilities in separate cartons.

Single line Ordering
Information Option

Domestic Preferences ⁽³⁸⁾	Housing	Lumens ⁽²⁾		
[Blank] =Standard TAA =Trade Agreements Act	LDSQ4C =LED Square Downlight 4" Nominal Aperture LDSQ4CCP =LED Square Downlight 4" Nominal Aperture, Chicago Plenum	02 =250 lumens 05 =500 lumens 08 =800 lumens 10 =1000 lumens 15 =1500 lumens 20 =2000 lumens	25 =2500 lumens 30 =3000 lumens 35 =3500 lumens 40 =4000 lumens 45 =4500 lumens ⁽³⁾ 50 =5000 lumens ⁽³⁾	55 =5500 lumens ⁽³⁾ 60 =6000 lumens ⁽³⁾ 65 =6500 lumens ⁽³⁾ 70 =7000 lumens ⁽³⁾ 75 =7500 lumens ⁽³⁾

Driver	Driver Options
D010 = 0-10V Dimming, 1% to 100%, 120V-277V, up to 7000 lumens (up to 3000 lumens for remote driver) 1D010 = 0-10V Dimming, 1% to 100%, 120V, 7500 lumens (3500 to 7000 lumens for remote driver) 2D010 = 0-10V Dimming, 1% to 100%, 277V, 7500 lumens (3500 to 7000 lumens for remote driver) 3D010 = 0-10V Dimming, 1% to 100%, 347V dedicated drivers for 800 to 4000 lumens; 500, 4500 and above use step down transformer (500 to 7000 lumens for remote driver) 1 driver: 500-7000 / 2 drivers: 7500	Blank =Integral driver R =Remote driver (offered with single driver, order remote driver separately) ⁽⁶⁾ PD =Magnetic Plug in Driver (offered with single driver) ⁽⁶⁾
D010TR = 0-10V Dimming, 5% to 100%, 120V-277V or 120V line voltage dimming, 250- 4500 lumens (up to 3000 lumens for remote driver) 1D010TR = 0-10V or line voltage Dimming, 5% to 100%, 120V, 5000-7500 lumens (3500 to 4500 lumens for remote driver) 2D010TR = 0-10V Dimming, 5% to 100%, 277V, 5000-7500 lumens (3500 to 4500 lumens for remote driver) 3D010TR = 0-10V or line voltage Dimming, 5% to 100%, 347V step down transformer, 250-7500 lumens (250 to 4500 lumens for remote driver) 1 driver: 250-4500 / 2 drivers: 5000-7500	
DE010 = 0-10V Dimming, 0% to 100%, 120V-277V, 500-7000 lumens (up to 3000 lumens for remote driver) 1DE010 = 0-10V Dimming, 0% to 100%, 120V, 7500 lumens (3500 to 7000 lumens for remote driver) 2DE010 = 0-10V Dimming, 0% to 100%, 277V, 7500 lumens (3500 to 7000 lumens for remote driver) 3DE010 = 0-10V Dimming, 0% to 100%, 0-10V Dimming, 347V step down transformer, 500-7500 lumens (500 to 7000 lumens for remote driver) 1 driver: 500-7000 / 2 drivers: 7500	
D5LT = Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V-277V, 500-7000 lumens (up to 3000 lumens for remote driver) 1D5LT = Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V, 7500 lumens (3500 to 7000 lumens for remote driver) 2D5LT = Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 277V, 7500 lumens (3500 to 7000 lumens for remote driver) 3D5LT = Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100% 347V step down transformer, 500-7500 lumens (500 to 7000 lumens for remote driver) 1 driver: 500-7000 / 2 drivers: 7500	
DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V, 800-4500 lumens (up to 3000 lumens for remote driver) ⁽⁵⁾ 1DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, 5000-7500 lumens (3500 to 4500 lumens for remote driver) ⁽⁵⁾ 2DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, 5000-7500 lumens (3500 to 4500 lumens for remote driver) ⁽⁵⁾ 3DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 347V step down transformer, 800-7500 lumens, RJ45 Connection (800 to 4500 lumens for remote driver) ⁽⁵⁾ 1 driver: 800-4500 / 2 drivers: 5000-7500	
DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V, up to 800-4500 lumens, RJ45 Connection (up to 3000 lumens for remote driver) ⁽⁵⁾ 1DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, 5000-7500 lumens, RJ45 Connection (3500 to 4500 lumens for remote driver) ⁽⁵⁾ 2DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, 5000-7500 lumens, RJ45 Connection (3500 to 4500 lumens for remote driver) ⁽⁵⁾ 3DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 347V step down transformer, 250-7500 lumens, RJ45 Connection (800 to 4500 lumens for remote driver) ⁽⁵⁾ 1 driver: 800-4500 / 2 drivers: 5000-7500	
DLE =Lutron Ecosystem dimming 1% to 100%, 120V-277V, 800-3500 lumens (up to 3000 lumens for remote driver) 1DLE =Lutron Ecosystem dimming 1% to 100%, 120V, 4000-7500 lumens (3500 lumens for remote driver) 2DLE =Lutron Ecosystem dimming 1% to 100%, 277V, 4000-7500 lumens (3500 lumens for remote driver) 3DLE =Lutron Ecosystem dimming 1% to 100%, 347V, step down transformer, 800-7500 lumens (800-3500 lumens for remote driver) 1 driver: 800-3500 / 2 drivers: 4000-7500	
DLV =Low voltage dimming driver (1-100%) for use with DLVP system 800-3000 lumens ⁽⁶⁾	

Options ⁽⁶⁾ (30) (31) (33)

EMBOD=Bodine® Emergency Module with Remote Test Switch ⁽¹⁰⁾
EMBOD6ST=Bodine® 6W Self Test Emergency Module with Remote Test Switch
EM7=7W Emergency Module with Remote Test Switch
EM14=14W Emergency Module with Remote Test Switch
EMBOD7ST=Bodine® Self Test Emergency Module ⁽¹⁰⁾
IEMBOD=Bodine® Emergency Module with Integral Test Switch ⁽¹⁰⁾ (22)

IEM7=7W Emergency Module with Integral Test Switch ⁽²²⁾
IEM14=14W Emergency Module with Integral Test Switch ⁽²²⁾
EMV7=7W Low Voltage Emergency Module with Remote Test Switch ⁽⁷⁾
EMV14=14W Low Voltage Emergency Module with Remote Test Switch ⁽⁷⁾
ETRD=Emergency transfer device ⁽³²⁾
WPST =Factory installed WaveLinX PRO Sensor Kit ⁽¹¹⁾ (13)
WLST =Factory installed WaveLinX LITE Sensor Kit ⁽¹¹⁾ (12)
WPN = WaveLinX PRO Wireless Node without sensor ⁽²³⁾ (27)
WLN = WaveLinX LITE Wireless Node without sensor ⁽³⁶⁾ (37)

Continued on next page.

Multi-line Order Information

SAMPLE ORDER NUMBER: EU4C10209035

Domestic Preferences ⁽³⁸⁾	Power Module	Lumen Levels ⁽²⁾	CRI ⁽²⁾	Color	
[Blank] =Standard BAA =Buy American Act TAA =Trade Agreements Act	EU4C=4-inch Universal LED Module	For use with one driver 0208IC =250, 500, 800 lumens, IC Rated (for use with all drivers, min 500 lumen with DE010 and D5LT, min 800 lumens with DLVP, Lutron and DMX) 1020 = 1000, 1500, 2000 lumens 1015IC =1000, 1500 lumens IC Rated 2540 =2500, 3000, 3500, 4000 lumens (For use with Lutron 3000-3500, DLVP 3000 lumens, DMX, D010, D010TR, D5LT and DE010 3000-4000) 4560 =4500, 5000, 5500, 6000 lumens (For use with DMX and D010TR 4500 lumens, D010, D5LT and DE010 4500-6000) ⁽³⁾ 6570 =6500, 7000 lumens (For use with D010, D5LT and DE010) ⁽³⁾ For use with two drivers 4075 =4000, 4500, 5000, 5500, 6000, 6500, 7000, 7500 lumens (For use with Lutron 4000-7500, D010TR & DMX 5000, D010, D5LT & DE010 7500 lumen) ⁽³⁾	90 =90 CRI Minimum 97 =97 CRI Minimum	90 CRI 24 =2400K 27 =2700K 30 =3000K 35 =3500K 40 =4000K 50 =5000K	97 CRI 27 =2700K 30 =3000K

SAMPLE ORDER NUMBER: 4LBSQ2H

Trim	Reflector	Flange	Finish	Options
4LB=4" LED	SQ =Square Anodized Aluminum SQW =Square Wide Anodized Aluminum CSSQ =Cast Shallow Square, Die Cast Aluminum PSSQ =Non-Conductive Shallow (dead front), white ⁽¹⁶⁾ ⁽¹⁷⁾ Wall Wash SQLWW =Square Anodized Aluminum Lensed Wall Wash	0 =White polymer trim ring ⁽³⁴⁾ 1 =Self flanged ⁽¹⁸⁾ 2 =White painted self flanged 4 =Knife edge rimless use with die cast only ⁽¹⁹⁾	LI =Specular Clear ⁽²⁰⁾ H =Semi-Specular Clear ⁽²⁰⁾ WMH =Warm Haze ⁽²⁰⁾ WH =Wheat ⁽²⁰⁾ GPH =Graphite Haze ⁽²⁰⁾ B =Specular Black ⁽²⁰⁾ MW =Matte White MB =Matte Black ⁽²¹⁾ MMS =Matte Metallic Silver ⁽²¹⁾	E =Integral Emergency Test Switch Hole ⁽²²⁾

REQUIRED if Remote Driver (R) is specified

SAMPLE ORDER NUMBER: RC10010D010TREM7

Domestic Preferences ⁽¹⁾	Remote Drivers	Lumens ⁽²⁾ ⁽¹⁴⁾		
[Blank] =Standard BAA =Buy American Act TAA =Trade Agreements Act	RC100 =Remote 100ft RC75 =Remote 75ft RC50 =Remote 50ft RC25 =Remote 25ft RC15 =Remote 15ft RC5 =Remote 5ft RC2 =Remote 2ft	02 =250 lumens 05 =500 lumens 08 =800 lumens 10 =1000 lumens 15 =1500 lumens	20 =2000 lumens 25 =2500 lumens 30 =3000 lumens 35 =3500 lumens 40 =4000 lumens 45 =4500 lumens	50 =5000 lumens 55 =5500 lumens 60 =6000 lumens 65 =6500 lumens 70 =7000 lumens

Continued on next page.

Multi-line Order Information

Driver
D010 = 0-10V Dimming, 1% to 100%, 120V-277V, 500-3000 lumens 1D010 = 0-10V Dimming, 1% to 100%, 120V, 3500-7000 lumens 2D010 = 0-10V Dimming, 1% to 100%, 277V, 3500-7000 lumens 3D010 = 0-10V Dimming, 1% to 100%, 347V dedicated drivers for 800 to 3000 lumens; 500, 3500-7000 lumens use step down transformer
D010TR = 0-10V Dimming, 5% to 100%,120V-277V or 120V line voltage dimming, 120V-277V, 250- 3000 lumens 1D010TR = 0-10V or line voltage Dimming, 5% to 100%, 120V, 3500-4500 lumens 2D010TR = 0-10V Dimming, 5% to 100%, 277V, 3500-4500 lumens 3D010TR = 0-10V or line voltage Dimming, 5% to 100% 347V step down transformer, 250-4500 lumens
DE010 = 0-10V Dimming, 0% to 100%, 120V-277V, 500-3000 lumens 1DE010 = 0-10V Dimming, 0% to 100%, 120V, 3500-7,000 lumens 2DE010 = 0-10V Dimming, 0% to 100%, 277V, 3500-7,000 lumens 3DE010 = 0-10V Dimming, 0% to 100%, 347V step down transformer, 500-7,000 lumens
D5LT = Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V-277V, 500-3000 lumens 1D5LT = Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V, 3500-7,000 lumens 2D5LT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 277V, 3500-7,000 lumens 3D5LT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100% 347V step down transformer, 500-7,000 lumens
DMX = DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V, 800-3000 lumens ⁽⁵⁾ 1DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, 3500-4500 ⁽⁵⁾ 2DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, 3500-4500 ⁽⁵⁾ 3DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 347V step down transformer, 800-4500 ⁽⁵⁾
DMXC5 = DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V up to 800-3000 lumens, RJ45 Connection ⁽⁵⁾ 1DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, 3500-4500 lumens, RJ45 Connection ⁽⁵⁾ 2DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, 3500-4500 lumens, RJ45 Connection ⁽⁵⁾ 3DMXCF =DMX/RDM Logarithmic Dimming, 0% to 100%, 347V step down transformer, 800-4500 lumens, RJ45 Connection ⁽⁵⁾
DLE = Lutron Ecosystem dimming 1% to 100%, 120V-277V, 25' Max remote length, 800-3000 lumens 1DLE =Lutron Ecosystem dimming 1% to 100%, 120V, 25' Max remote length, 3500 lumens 2DLE =Lutron Ecosystem dimming 1% to 100%, 277V, 25' Max remote length, 3500 lumens 3DLE =Lutron Ecosystem dimming 1% to 100%, 347V, step down transformer, 25' Max remote length, 800-3500 lumens
DLV = Low voltage dimming driver (1-100%) for use with DLVP system, 800-3000 lumens ⁽⁶⁾

Options ^{(6) (30) (31) (33)}	Controls
EMB0D =Bodine® Emergency Module with Remote Test Switch ⁽¹⁰⁾ EMB0D6ST =Bodine® 6W Self Test Emergency Module with Remote Test Switch EM7 =7W Emergency Module with Remote Test Switch EM14 =14W Emergency Module with Remote Test Switch	WPST =Factory installed WaveLinX PRO Sensor Kit ^{(11) (13)} WLST =Factory installed WaveLinX LITE Sensor Kit ^{(11) (12)} WPN = WaveLinX PRO Wireless Node without sensor ^{(23) (37)} WLN = WaveLinX LITE Wireless Node without sensor ^{(36) (37)}
EMB0D7ST =Bodine® Self Test Emergency Module with Remote Test Switch ⁽¹⁰⁾ EMV7 =7W Low Voltage Emergency Module with Remote Test Switch ⁽⁷⁾ EMV14 =14W Low Voltage Emergency Module with Remote Test Switch ⁽⁷⁾ ETRD =Emergency transfer device ⁽²²⁾	

Accessories (Order separately) ⁽²⁵⁾		
LGSKT4SQIP66 =IP66 Gasket Kit	Bar Hangers HB26 =C-channel Bar Hanger, 26" Long, Pair HB50 =C-channel Bar Hanger, 50" Long, Pair RMB22 =Wood Joist Bar Hanger, 22" Long, Pair	Transformers H347 =H347 for 5500 lumens and below H347200 =347 to 120V Step Down Transformer, 200VA
PRSQ4 =Rimless Plaster Ring ⁽²⁶⁾ RKPSQ4 =Knife Edge plaster Ring ⁽²⁷⁾	Connected Lighting Systems ^{(6) (11)} WPST = Field installed WaveLinX PRO Sensor Kit ⁽¹³⁾ WLST = Field installed WaveLinX LITE Sensor Kit ⁽¹²⁾	
RPMSQ4MW =Rimless Millwork Ring, Matte White ⁽²⁶⁾ RPMSQ4MB =Rimless Millwork Ring, Matte Black ⁽²⁶⁾ RKMSQ4MW =Knife Edge Millwork Ring, Matte White ⁽²⁷⁾ RKMSQ4MB =Knife Edge Millwork Ring, Matte Black ⁽²⁷⁾		

Notes: 2. Nominal Lumens will vary depending on selected color, CRI, driver and reflector finish. Reference Multiplier tables . 3. Product is marked spacing. Reference table on page 4 for the spacing details . 5. DMX fixtures default to full on upon loss of DMX signal. 6. Not available with Chicago Plenum. 7. ULus listed only 8. Offered with - D010, D5LT, DE010 up to 7000 lumens - D010TR, DMX up to 4500 lumens - DLE, DL2 up to 3500 lumens 9. Not available with 5500 lumens 10. Not available for 6500-7000 lumens 11. Refer to system specifications for additional information,features, and benefits. Order either factory installed option or accessory. Use with 0-10V driver. 12. WLST = WaveLinX LITE tilemount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX LITE system specifications) 13. WPST = WaveLinX wireless sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with 0-10V only.	14. IC rated up to 3000 lumens 15. Spun aluminum only 16. PS available in self-flanged MW finish only 17. Offered up to 2000 lumens 18. Flange is the same finish as the reflector 19. Requires knife edge accessory ring 20. Anodized or spun reflectors 21. Die cast only 22. Available with SQ and SQW open anodized Aluminum trims. Required for use with all IEMBOD, IEMBOD6ST, IEM7, IEM14,IEMV7 and IEMV14 housings. Not offered with remote driver. 23. WPN = WaveLinX PRO wireless node provides luminairelevel control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with D010 or DE010 drivers only. 24. Black or white paint. 25. Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information. 26. Order trim with polymer trim ring (Consult specification sheet for color ordering information and options). 27. Order die cast trim with flange type 4	28. Order with self flanged trim. 29. Use only with single LED/driver. 30. If using remote driver order battery and controls with the remote driver. 31. 120V-277V 32. Used to bypass local control during outage. Must be used in conjunction with UL 1008 device (provided by others) 33. Non-IC 34. Not available with CSSQ Cast Shallow Square, Die Cast Aluminum reflector 36. WLN = WaveLinX LITE wireless node provides luminaire level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with D010 or DE010 drivers only. 37. Not compatible with 347V or Chicago plenum. 38. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC PREFERENCES website for more information. Components shipped separately may be separately analysed under domestic preference requirements. Offered with spun aluminum shallow (S) trims.
--	---	---