


# PAR30 12.5W 277V TITANIUM CRI<sup>SP</sup> LED SERIES 4.0



CRI<sup>SP</sup>



12.5W REPLACES



75W  
Hal.

80% Energy Savings

**\$239** Savings  
per lamp\*

- Direct line voltage 120-277V - Not compatible with ballasts
- Exceptional color rendering CRI 90
- Richer reds and natural skin tones (R9 50, R13 90)
- Tight LED binning for consistent CCT across all lamps
- High efficacy 68 LPW in Warm White
- Suitable for use in totally enclosed fixtures



## PATENT PENDING REFINE OPTIC


The innovative REFINE optic provides a high candela to lumen ratio, optimizing light usage for directional applications.



**REFLECTOR**  
Directs light

**FOCUS LENS**  
Focuses center beam

**SHAPING LENS**  
Refines beam pattern

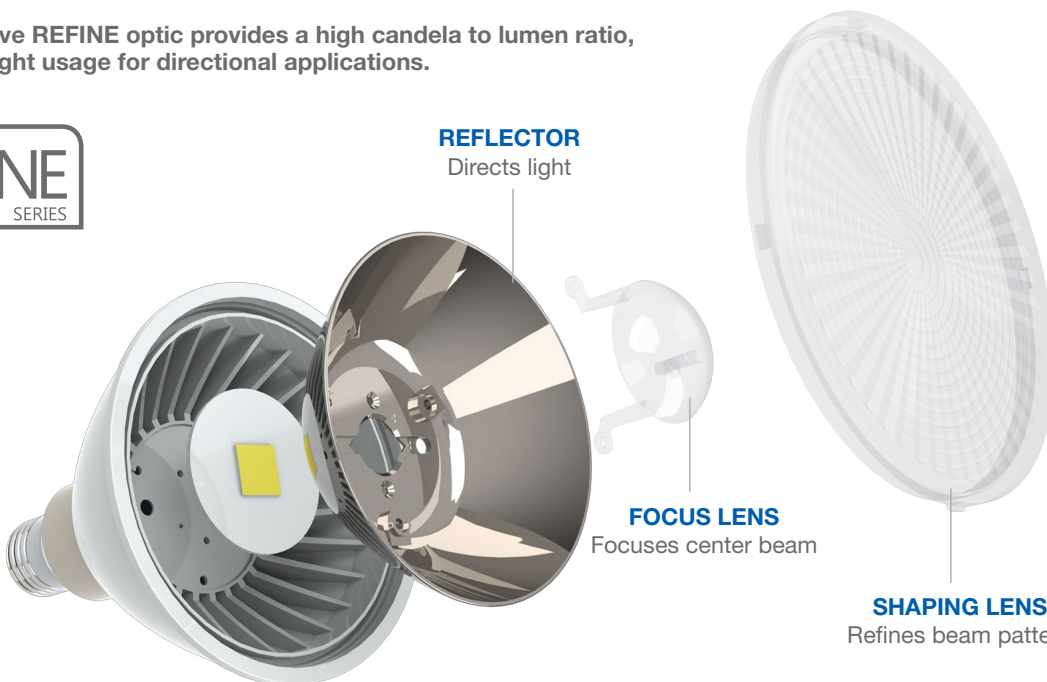


WATCH THE VIDEO

# PAR30 12.5W 277V TITANIUM CRI<sup>SP</sup> LED SERIES 4.0




## ILLUMINANCE & CANDELA DISTRIBUTION


12.5PAR30G4/930FL40/277V

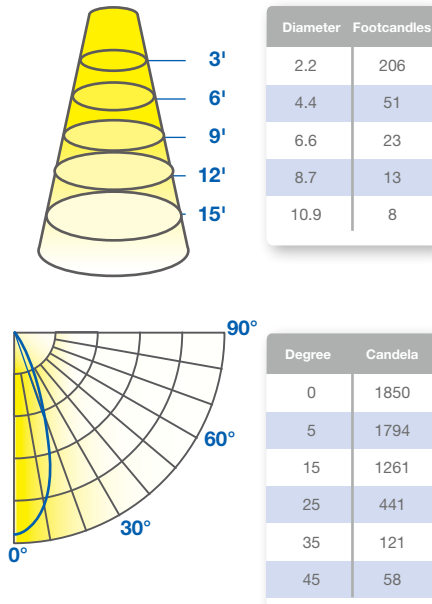

12.5PAR30G4/940FL40/277V

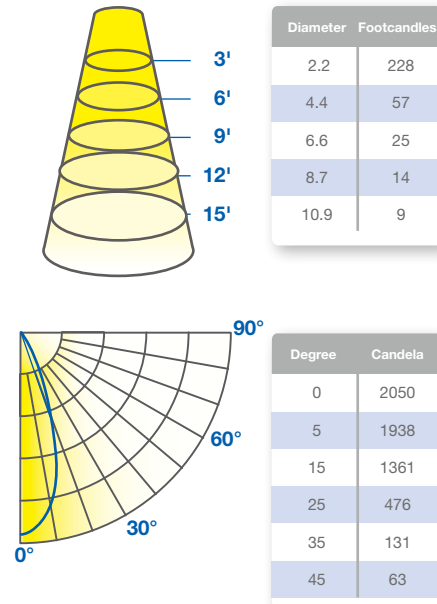

**Base:** E26  
**Voltage:** 120-277V  
**Dimmable:** No  
**PF:** 0.9  
**Lifetime:** 40,000 hrs  
**Weight:** 0.52lb / 236g



## SPECIFICATIONS

| Model                    | Product | Power (W) | CCT                 | CRI (typ.) | R9 / R13 (typ.) | Lumens | LPW | Beam Angle | CBCP (cd) |
|--------------------------|---------|-----------|---------------------|------------|-----------------|--------|-----|------------|-----------|
| 12.5PAR30G4/930FL40/277V | 16125   | 12.5      | Warm White 3000K    | 90         | 50 / 90         | 850    | 68  | FL 40°     | 1850      |
| 12.5PAR30G4/940FL40/277V | 16128   | 12.5      | Natural White 4000K | 90         | 50 / 90         | 900    | 72  | FL 40°     | 2050      |

\* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$8 halogen with 1500-hr lifetime, \$28 LED with 40,000-hr lifetime

\*\* Suitable for use in totally enclosed fixtures

\*\*\* Suitable for damp locations. Not for use where directly exposed to weather or water