


CF Lamps

GOODLAMP™

- U-Tube compact fluorescent design
- Miniature GoodLamp™ subcompact height fits any application

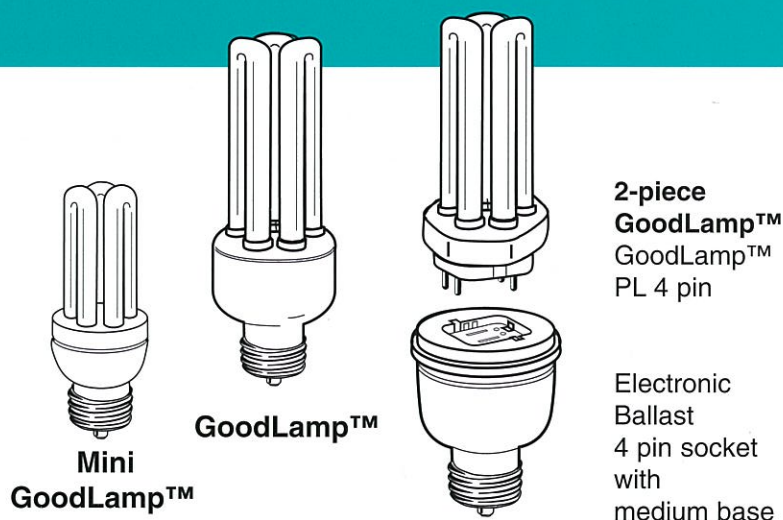

TCP Part Number	Watts	Incandescent Watts Comparison	Ballast Type / Special Features Colors / CRI	Input Line Current	M.O.L. (Inches)	Diameter (Inches)	Initial Lumens	Power Factor	Total Harmonic Distortion	Replacement Lamp	Dimming Range
-----------------	-------	-------------------------------	--	--------------------	-----------------	-------------------	----------------	--------------	---------------------------	------------------	---------------

Mini GoodLamp™ Electronic NPF, 120 volts, 10,000 Hours Avg. Life

19503	3	15	Electronic, 2700°K, CRI 84	.09A	3.70	1.60	150	>.50	<150%	N/A	N/A
19507	7	25	Electronic, 2700°K, CRI 84	.11A	3.95	1.60	350	>.50	<150%	N/A	N/A
19514	14	40	Electronic, 2700°K, CRI 84	.15A	4.80	1.60	650	>.50	<150%	N/A	N/A

Add suffix C to part number for candelabra base

GoodLamp™ Electronic NPF, 120 volts, 10,000 Hours Avg. Life

19515	15	60	Electronic, 2700°K, CRI 84	.24A	5.20	2.20	900	>.50	<150%	N/A	N/A
19520	18	75	Electronic, 2700°K, CRI 84	.30A	5.70	2.20	1200	>.50	<150%	N/A	N/A
19523	23	90	Electronic, 2700°K, CRI 84	.38A	6.20	2.20	1400	>.50	<150%	N/A	N/A
19544	44	150	Electronic, 2700°K, CRI 84	.60A	7.50	2.20	2400	>.50	<150%	N/A	N/A

3 way GoodLamp™ Electronic NPF, 11, 22, 33 watt, 120 volts, 10,000 Hours Avg. Life

19833	11,22,33	50,100,150	Electronic, 2700°K, CRI 84	.42A	7.60	2.20	1500	>.50	<150%	N/A	N/A
-------	----------	------------	----------------------------	------	------	------	------	------	-------	-----	-----

2 piece GoodLamp™ Electronic NPF, 120 volts

										Average Lamp Life 10,000 Hrs.	Average Ballast Life 50,000 Hrs.
19915L	15	60	Electronic, 2700°K, CRI 84	.24A	6.60	2.20	900	>.50	<150%	TCX 4-pin	N/A
19918L	18	75	Electronic, 2700°K, CRI 84	.29A	7.10	2.20	1100	>.50	<150%	TCX 4-pin	N/A
19927L	27	100	Electronic, 2700°K, CRI 84	.45A	7.60	2.20	1700	>.50	<150%	TCX 4-pin	N/A

GoodLamp™ Replacement TCX Base PL 4-pin Lamp, 10,000 Hours Avg. Life

34015	15	60	Electronic, 2700°K, CRI 84	N/A	3.60	2.20	900	N/A	N/A	TCX 4-pin	N/A
34018	18	75	Electronic, 2700°K, CRI 84	N/A	4.10	2.20	1100	N/A	N/A	TCX 4-pin	N/A
34027	27	100	Electronic, 2700°K, CRI 84	N/A	4.60	2.20	1700	N/A	N/A	TCX 4-pin	N/A

For Replacement TCX Base PL 4 pin Ballast Adapters see page 9 ; For Additional Technical Specifications see page 23
For Floodlight Reflector covers see pages 12 and 15