



KTEB-2C72-1-TP	
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Parallel
Input Voltage	120Vac $\pm$ 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F32T8	2	62	0.89	0.58	1.58	0.9	1.45	130
F32T8	1	33	0.53	0.52	1.40	0.9	2.73	130
F25T8	2	47	0.70	0.55	1.55	0.95	2.02	150
F25T8	1	24	0.42	0.49	1.47	0.95	3.96	150
F17T8	2	36	0.57	0.53	1.55	0.95	2.64	160
F17T8	1	19	0.34	0.46	1.61	0.95	5.00	160
F15T8	2	29	0.48	0.50	1.69	0.95	3.28	160
F15T8	1	15	0.29	0.45	1.55	0.95	6.33	160

PERFORMANCE:


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- Lamp end-of-life protected

APPROVALS:


- UL, cUL 935 listed

PHYSICAL DIMENSIONS:

Length (L):	6.46"
Width (W):	1.89"
Height (H):	1.00"
Mounting (M):	6.00"
Lead Length:	
White, Black	20"
Blue	32x32"
Red	48x48"

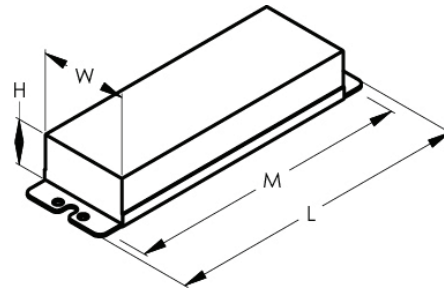

WIRING DIAGRAM:

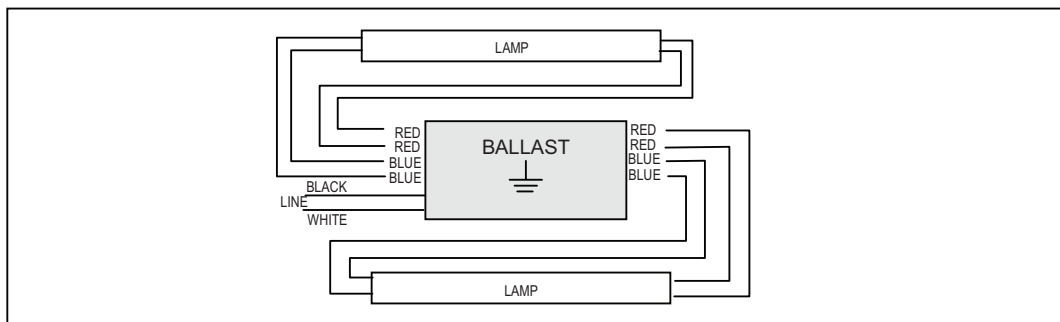

1.877.652.9640
248.652.9640

Commercial and Residential
Monday-Friday 8am - 5pm EST

Green Electrical Supply
www.GreenElectricalSupply.com
2355 Arizona Court, Rochester Hills, MI 48309