



T12

Magnetic T12

Known for durability and long life, Keystone's line of magnetic ballasts continue to provide superior value and performance. Now available only to the ballast replacement market, we've made maintaining your existing magnetic lighting system simple.

Features & Benefits

Industry Tested for Over 50 Years

- Dependability you can count on from a name you've trusted for over 50 years.

We Still Manufacture This Product Line

- Other manufacturers have discontinued their offering, but Keystone will continue to offer this product until 2010.

Easy Swap-Out

- Great for replacing existing magnetic ballast installations. Simply swap-out the old magnetic with a new factory-sealed magnetic ballast from Keystone.

Note:

Keystone Technologies may continue to supply these magnetic ballasts for T12 lamps until July 1, 2010. After this date the U.S. Department of Energy will prevent the sale of these ballasts. The following regulations are currently in effect on these items:

- May only be sold for the ballast replacement market (through electrical wholesalers and distributors).
- Each ballast must be marked "For Replacement Use Only".
- All lead wires must be no longer than 12" to prevent installation into original fixtures.
- Ballast carton quantity may not exceed 10 ballasts.

For unrestricted alternatives, please see Electronic T12.

Applications:

- Office
- Commercial
- Industrial
- Residential




P.O. Box 246 Ambler, PA 19002 Toll Free (800) 464-2680
Phone (215) 283-2600 Fax (215) 628-4412 info@KeystoneBallast.com

THE RIGHT CHOICE IN BALLASTS!

Lamp Type	# of Lamps	Lamp Watts	Input Volts	Catalog #	Input Current (Amps)	Input Power (Watts)	Power Factor	THD (%)	Ballast Factor	Starting Method	Wiring Diagram	Dim.	Warranty
F15T8	1	15	120	120TP	0.63	31	>0.40	<10	1.00	Trigger	4	D1	3
	2		120	220TP	0.65	35	>0.45	<20	0.70	Trigger	5	C1	3
F14T12	1	14	120	120TP	0.69	29	>0.35	<10	0.93	Trigger	4	D1	3
F15T12	1	15	120	120TP	0.63	31	>0.40	<10	1.00	Trigger	4	D1	3
	2		120	220TP	0.65	35	>0.45	<20	0.70	Trigger	5	C1	3
F20T12	1	20	120	120TP	0.62	30	>0.40	<10	0.85	Trigger	4	D1	3
	2		120	220TP	0.59	35	>0.50	<20	0.54	Trigger	5	C1	3
F40T12	2	34	120	240TPH	0.64	75	>0.95	<25	0.88	Rapid	5	C2	3
			277	240TPH277	0.30	78	>0.95	<20	0.90	Rapid	5	C2	3
	2	40	120	240TPH	0.77	88	>0.95	<20	0.91	Rapid	5	C2	3
			277	240TPH277	0.33	88	>0.95	<20	0.91	Rapid	5	C2	3
F72T12	2	55	120	296TPH	1.20	133	>0.95	<25	0.88	Instant	8	D2	3
			277	296TPH277	0.51	133	>0.95	<25	0.90	Instant	15	D2	3
F96T12	2	60	120	296TPH	1.20	133	>0.95	<25	0.74	Instant	8	D2	3
			277	296TPH277	0.53	131	>0.90	<40	0.74	Instant	15	D2	3
		75	120	296TPH	1.40	160	>0.95	<25	1.00	Instant	8	D2	3
			277	296TPH277	0.53	131	>0.90	<40	0.74	Instant	15	D2	3
F72T12HO	2	85	120	296HOTPH	1.85	207	>0.90	<20	0.94	Rapid	5	D8	3
			277	296HOTPH277	0.76	202	>0.95	<25	0.94	Rapid	5	D8	3
F96T12HO	2	96	120	296HOTPH	1.95	220	>0.92	<20	0.93	Rapid	5	D8	3
			277	296HOTPH277	0.78	210	>0.95	<15	0.90	Rapid	5	D8	3
		110	120	296HOTPH	2.20	260	>0.95	<10	0.95	Rapid	5	D8	3
			277	296HOTPH277	0.94	254	>0.95	<10	0.95	Rapid	5	D8	3

Case Styles (inches)

	M	L	W	H
C1	6.00	6.61	2.36	1.57
C2	9.00	9.49	2.40	1.61

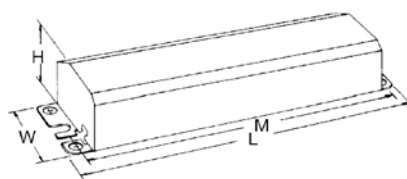


Case C

	M	L	W	H
D1	6.00	6.46	1.89	1.42
D2	11.00	11.65	3.15	1.85
D8	11.00	11.70	3.15	2.50




Case D


Wiring Diagrams




4



5



8



15



Specifications subject to change without notice.
For complete product specifications visit KeystoneBallast.com
Printed in U.S.A. ©2008 Keystone Technologies, LLC

