


LED LAY IN TROFFER - CENTER BASKET


1X4', 2X2', 2X4'




2X4' 30W 40W 50W

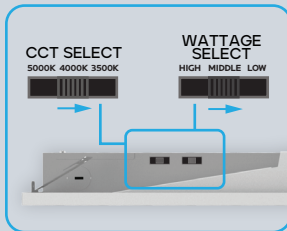

DRIVER WITH CCT & WATTAGE SELECT SWITCH

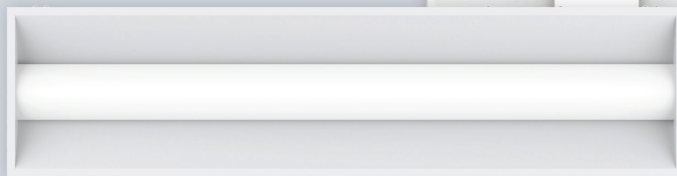

1X4' 16W 20W 30W



2X2' 20W 30W 40W



COLOR SELECTABLE

3500K 4000K 5000K


WATTAGE
SELECTABLE


3 OPTIONS

DIMMABLE


0-10V

IC
RATED

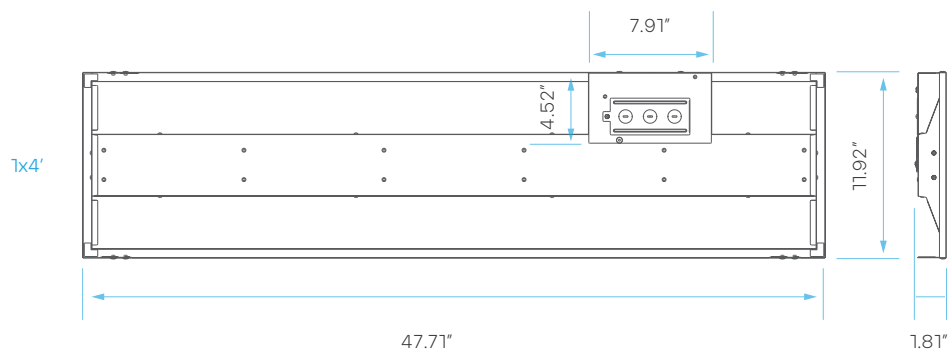

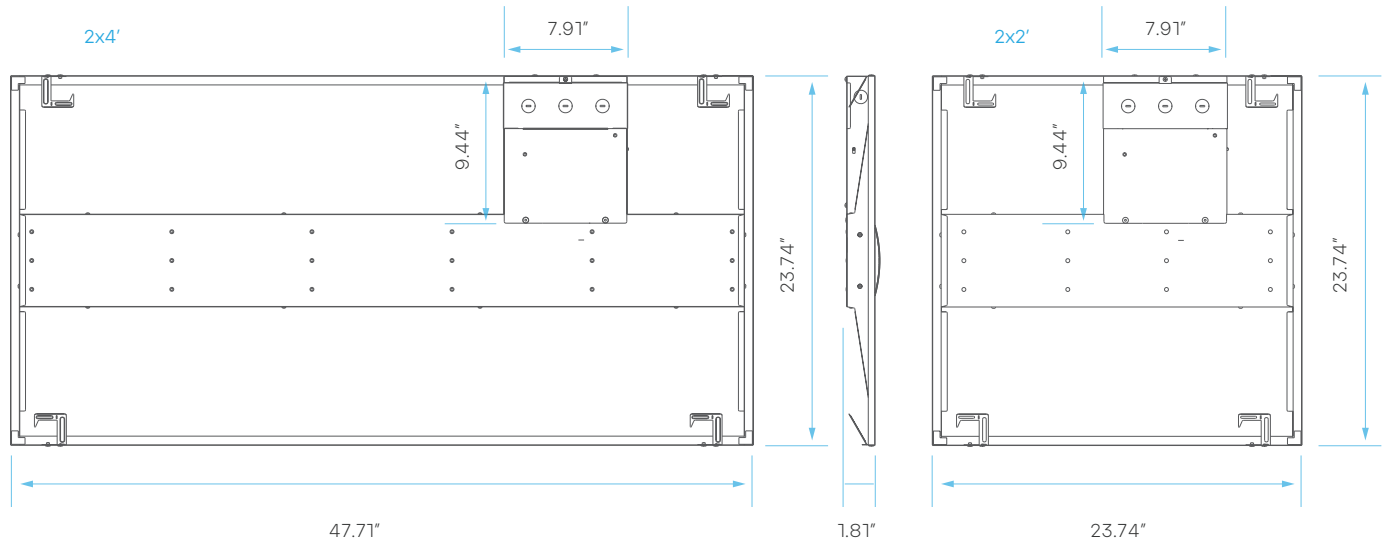


MAKEUP OF CCT & WATTAGE SELECT TROFFER

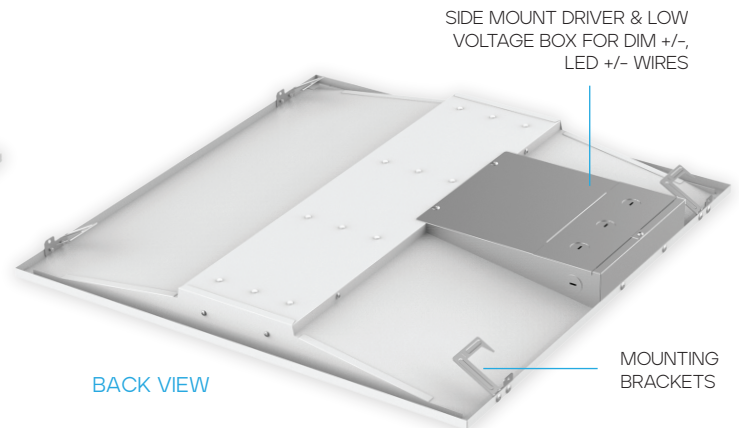

1X4 TROFFER	2X2 TROFFER	2X4 TROFFER
3500K ☐ 16W ☐	3500K ☐ 20W ☐	3500K ☐ 30W ☐
4000K ☐ 20W ☐	4000K ☐ 30W ☐	4000K ☐ 40W ☐
5000K ☐ 30W ☐	5000K ☐ 40W ☐	5000K ☐ 50W ☐

CCT & WATTAGE SELECT SWITCH

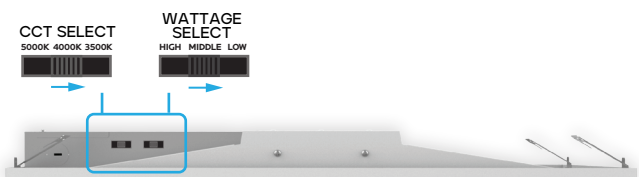

ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
2x2'	LR25135	LED1X4TROF/CB/3WO/3CCT/D	30	120-277V	125	50,000	\$ 2.40
	LR25135-20W	LED1X4TROF/CB/3WO/3CCT/D-20W	20				
	LR25135-16W	LED1X4TROF/CB/3WO/3CCT/D-16W	16				
2x4'	LR25136	LED2X2TROF/CB/3WO/3CCT/D	40	120-277V	125	50,000	\$ 3.61
	LR25136-30W	LED2X2TROF/CB/3WO/3CCT/D-30W	30				
	LR25136-20W	LED2X2TROF/CB/3WO/3CCT/D-20W	20				
2x4'	LR25137	LED2X4TROF/CB/3WO/3CCT/D	50	120-277V	125	50,000	\$ 4.81
	LR25137-40W	LED2X4TROF/CB/3WO/3CCT/D-40W	40				
	LR25137-30W	LED2X4TROF/CB/3WO/3CCT/D-30W	30				

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	UL	DLC
LR25135	LED1X4TROF/CB/3WO/3CCT/D	3500K/4000K/5000K	CCT SELECT	3750 (@30W)	80	YES	YES
LR25135-20W	LED1X4TROF/CB/3WO/3CCT/D-20W			2500 (@20W)			
LR25135-16W	LED1X4TROF/CB/3WO/3CCT/D-16W			2000 (@16W)			
LR25136	LED2X2TROF/CB/3WO/3CCT/D	3500K/4000K/5000K	CCT SELECT	5000 (@40W)	80	YES	YES
LR25136-30W	LED2X2TROF/CB/3WO/3CCT/D-30W			3750 (@30W)			
LR25136-20W	LED2X2TROF/CB/3WO/3CCT/D-20W			2500 (@20W)			
LR25137	LED2X4TROF/CB/3WO/3CCT/D	3500K/4000K/5000K	CCT SELECT	6250 (@50W)	80	YES	YES
LR25137-40W	LED2X4TROF/CB/3WO/3CCT/D-40W			5000 (@40W)			
LR25137-30W	LED2X4TROF/CB/3WO/3CCT/D-30W			37500 (@30W)			

COMPATIBLE
WITH:

LR35126
Emergency
LED Driver



LR24183
4' CABLE
EXTENDER

