



MEGH175SF/480/I



JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Mega flood with heavy duty, die cast slipfitter for 2 3/8" O.D. tenon size. Slipfitter joint adjusts over 180° arc. Lamp supplied.

SPECIFICATIONS

Finish:

Chip and fade resistant polyester powder coating

Housing:

One-piece die cast aluminum with die cast door frame held captive when opened

Lens Gasket:

High temperature extruded silicone set in die cast retaining groove. Remains in place during relamping

Lens:

Thermal, tempered shock resistant glass, 5/32" thick

Reflector:

High quality anodized aluminum eliminates redirected energy to prolong lamp life. Contoured for maximum horizontal and vertical beam dispersion.

UL Listing:

Suitable for wet locations. Suitable for mounting within 4' of the ground.

Socket:

3 socket positions customize beam spread to the application (center position is standard). Porcelain socket pulse rated 4kv, 1500 watts and 600 volts, reinforced with cat's eyes for added durability. Silicone and fiberglass #14 gauge socket leads rated for 200° C. Plated screw shell designed to resist corrosion with spring loaded center contact

Ballast Volts:

480 V

EPA:

0.6

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws


Color:

Bronze

Weight:

288

DIMENSIONS

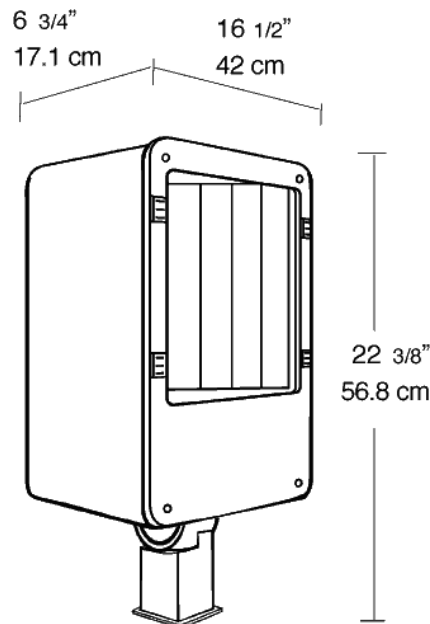

ORDERING INFORMATION

Metal Halide

Lamp supplied with fixture

| Total Watts | Lamp Type | Lamp Base | Ballast | Starting Amps/ Operating Amps | | | | Input Watts | LAMP ANSI | Initial Lumens | Lamp Hours |
|----------------|--------------|--------------|--------------|-------------------------------|------|------|------|----------------|--------------|-------------------|---------------|
| | | | | 120V | 208V | 240V | 277V | | | | |
| 175 | ED17 | Medium | CWA-HPF 480V | | | | | 210 | M57 | 13500 | 10000 |

Factory Installed Options

Add suffix to Catalog Number

Swivel Photocontrol wired for 120V (/PCS)

Single fusing for 120 and 277 volt. (/F)

Double fusing for 208 and 240 volt. (/FF)

Button Photocontrol wired for 480V (/PC4)

Button Photocontrol wired for 277V (/PC2)

Button Photocontrol wired for 120V (/PC)

480 volt ballast (substitute /480 for QT) (/480)

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com

© 2009