## **ND6R26E/E2**





Easy to install 4" and 6" rough-in with die-cast aperture ring, removable driver, thermal protector and adjustable butterfly brackets. This rough-in is designed to make new construction recessed downlighting easy 90 CRI.

Color: N/A Weight: 8.5 lbs

Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Type:	Constant Current	Watts:	26W
120V:	0.25A	Color Temp:	Sold Separately
208V:	0.17A	Color Accuracy:	90 CRI
240V:	0.15A	L70 Lifespan:	N/A
277V:	0.12A	Lumens:	N/A
Input Watts:	0W	Efficacy:	N/A
Efficiency:	N/A		

## **Technical Specifications**

#### Listings

#### **UL Listed:**

Suitable for wet locations covered ceiling.

#### Optical

#### Photometrics:

Photometrics are based on prorated reports. Contact the RAB Lighting Design department for the most upto-date data.

#### Construction

#### **Housing Component:**

This component must be ordered with New Construction Round Trim Module in order to make a complete fixture.

## **Ambient Temperature:**

Suitable for use in 40°C ambient temperatures.

#### **Cold Weather Starting:**

The minimum starting temperature is -40°F/-40°C.

## Aperture Size:

6" Rough-In.

#### **Drop Ceiling Installation:**

NDLED can be installed in drop ceiling tiles when using optional c-channel bars and following local construction codes.

#### **Junction Box:**

Integral junction box with wiring capacity for Min 90°C supply conductors 4 in 4 out

#### **Butterfly Brackets:**

The Butterfly bracket allows to mount with the following 1/4 x 1/2" bar stock, C Channel, 1/2" conduit, or nailer bars.

#### **Easy Installation:**

The EZConnector makes installation easy.

#### **Thermal Protector:**

Thermal protector included. Disables power if temperature exceeds safe operation levels.

## Electrical

## **Emergency Battery Backup:**

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

#### Driver:

Electronic Low Voltage, Constant Current, Class 2, 120-277V, 50/60Hz, 350mA, 120V 0.17A 277V 0.09A, Power Factor 99.4%, THD  $\leq$  10%.

## **Dimming Driver:**

Electronic Low Voltage compatible dimmer with dimming as low as 5%.

#### Other

## Equivalency:

DLED 26W is equivalent to 100W PAR.

## Air Tight:

Housing certified Air Tight as per ASTM E283

#### California Title 24:

ND6R26E complies with 2013 California Title 24 building and electrical codes as a residential indoor fixture. It also complies as a commercial indoor fixture for general spaces when used with a vacancy sensor and ELV dimming control. Select a vacancy sensor using catalog number LVS800. ELV dimmer provided by others.

## Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

#### **Country of Origin:**

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

## **Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act

#### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

## **Trade Agreements Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

## GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.


## **LED Characteristics**

#### **Color Accuracy:**

90 CRI

# ND6R26E/E2



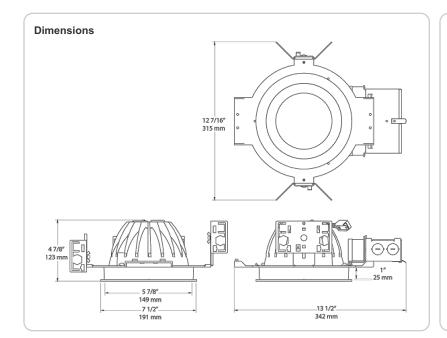

## **Features**

Butterfly bracket allows mounting with bar stock, "C" channel, 1/2" conduit or nailer bars  $\,$ 

Low-profile design allows for installation in ceilings with limited space

Sturdy design with die cast aperture frame

90 CRI

Ordering Matrix									
Family	Туре	Size	Shape	Watts	Dimming Driver	Battery Backup			
ND	۸	6	R	26	E	/E2			
	Blank = Standard IC = Insulation Contact (IC)	<b>4</b> = 4" <b>6</b> = 6"	<b>R</b> = Round	12 = 12W 20 = 20W 26 = 26W	Blank = Triac Driver E = ELV Driver L = Lutron Driver F = 120V-277V Driver	Blank = No Battery Backup /E2 = 120-277V Backup			