



STL360Q2W



JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Super Stealth 360 sensor with twin 150w Q2 Quartz Floods. Pre-wired and pre-assembled on CU4 cover-plate. Unique flood pan adjustment keeps lamps level for longer life. Lamps included.

SPECIFICATIONS

Advanced Detection Logic:

Minimizes false triggers

Color Matched Lens:

Dark lens with bronze units, white lens with white units

Evening Timer:

Keeps lights on for 1-8 hours after dusk. Then sensor is motion activated until dawn.

Lens Masks:

Customized press apply lens mask included to reduce coverage easily

Photoelectric Control:

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications.

Power Consumption:

1 watt

RF Immunity:

Circuits fully shielded for maximum radio frequency immunity.

Scanning LEDs:

3 LEDs continually scan back-and-forth

Set it and forget it:

STL360's full coverage pattern reduces need for aiming and adjustment.

Surge Protection:

Withstands up to 6000 volts

Temperature Compensation:

Sensitivity adjusted automatically for consistent detection in hot and cold ambient temperatures.

Time Adjustment:

5 seconds to 12 minutes

UL Listing:

Suitable for wet locations.

Voltage:

120 volts AC 60 Hz

Wall Switch Manual Override:

Two flip logic prevents activation by momentary power outages. Override resets to auto at dawn. No extra wiring needed.

Wide Sensitivity Control:

Adjustable from 100% to 30%

Detection:

Senses 180° out and 360° down for Total Detection

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

Switching Capacity:

8 amps, 1000 watts incandescent @ 120 volts


Color:

White


Weight:

4.39

DIMENSIONS

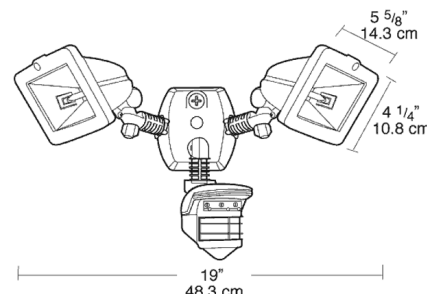

DETECTION PATTERN

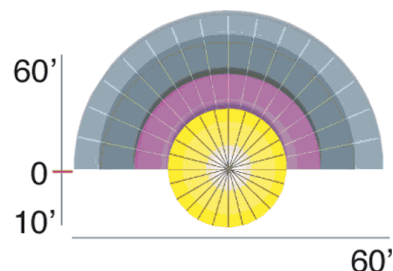

ORDERING INFORMATION

Lamp supplied with fixture	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
	120V	208V	240V	277V	0	0	0	0	0	0	0	0
Lamp supplied with fixture	150	0	0	0	0	0	0	0	0	0	0	0

Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
© 2007