

Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	LED Info		
Type	Constant Current	Watts	72W		
120V	0.60A	Color	3000/3500/4000/5000K		
208V	0.35A	Temp			
240V	0.30A	Color	84 CRI		
277V	0.26A	Accuracy			
Input Watts 46.1-94.2W		L70 Lifespan	100,000 Hours		
		Lumens	5736-12028 lm		
		Efficacy	122.8-127.7 lm/W		

# **Technical Specifications**

# Compliance

# UL Listed:

Suitable for damp locations

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### **Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

#### **DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-NOVM87

# Electrical

# Driver:

48W: Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.40A, 208V: 0.23A, 240V: 0.20A, 277V: 0.18A 72W: Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.60A, 208V: 0.35A, 240V: 0.30A, 277V: 0.26A 96W: Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.80A, 208V: 0.47A, 240V: 0.40A, 277V: 0.35A

## **Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 5%.

# THD:

5.6% at 120V, 11.7% at 277V

# Power Factor:

99.7% at 120V, 96.9% at 277V

#### **Surge Protection:**

1-2kV

# Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### Wattage Equivalency:

48W: Replaces up to (2) F32T8 or (1) F96T8 72W: Replaces up to (4) F32T8 or (2) F96T8 96W: Replaces (5) F32T8 or (2) F96T8

### **LED Characteristics**

#### LEDs:

Long-life, high-efficiency, surface-mount LEDs

### **Color Consistency:**

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

#### **Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Construction

#### **Cold Weather Starting:**

The minimum starting temperature is -20°C (-4°F)

# **Maximum Ambient Temperature:**

Suitable for use in up to 55°C (131°F)

#### Housing:

 ${\sf Cold\ Rolled\ Carbon\ Steel\ Sheets\ and\ Strip\ (SPCC)}$ 

#### Lens:

Diffused Polymethyl Methacrylate (PMMA)

#### Finish:

Formulated for high durability and long-lasting color

# Green Technology:

Mercury and UV free. RoHS-compliant components.

**TOMO-8** 



# **Technical Specifications (continued)**

# Installation

#### Mounting:

Comes standard with two mounting accessories: aircraft cable for secure, suspended mounts and a stainless bracket for easy mounting to junction boxes. Power cord and canopy cover included.

#### Other

### **Lighting Pattern:**

70% downlight, 30% uplight


#### Accessories:

Fixture to fixture connector: TOMO CONNECT

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="mailto:rable-r

### **Dimensions**

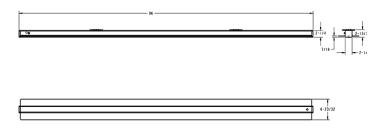

### **Features**

0-10V dimming

100,000-Hour LED lifespan

5-Year, No-Compromise Warranty



ordering Matrix								
Family	Length (Wattage)	Color Temp	Finish	Driver	Options			
томо -	- 8							
	<b>4</b> = 4' (48/36/24W) <b>8</b> = 8' (96/72/48W) <b>2</b> = 2' (24/18/12W)	<b>Blank =</b> 3000/3500/4000/5000K CCT Adjustable	Blank = White	Blank = 120-277V, 0-10V Dimming	/LCBs/E = Lightcloud Blue w/PIR Sensor and Battery Backup ¹ /LCB/E = Lightcloud Blue-enabled w/Battery Backup ¹ /LCBS = Lightcloud Blue-enabled w/PIR sensor /LCB = Lightcloud Blue-enabled /PIR/E = Passive Infrared Occupancy Sensor w/Battery Backup ¹ /LC/E = Lightcloud w/Battery Backup /LCS = Lightcloud Sensor /LC = Lightcloud /E = Battery Backup ¹ /PIR = Passive Infrared Occupancy Sensor Blank = No Option			
		¹ *Available o	nly for 4' and 8'		·			