




Decorator Commercial Specification Grade Combination Devices

Single Pole Switch with Second Device, Grounding

Combination Devices


FEATURES

- Grounding terminal screw standard.
- Combination switch with additional switch has 120/277V/AC rating ideal for fluorescent lighting fixtures typical in commercial applications.
- Switches have break-off provision for wiring both devices on same circuit or on separate circuits.
- Receptacles have triple wiper line contacts and double wiper ground contacts to insure long-term plug retention.
- 0.050" (1.27mm) thick steel mounting strap zinc-plated for corrosion resistance.
- Combination slot/Phillips head mounting and terminal screws ease installation with power screwdrivers. (Slot/Robertson screws in Canada where available).
- Terminal screws backed out – ready for wiring.
- Side wire terminals accept up to #10 solid or stranded wire.
- Pilot light may be wired to indicate power on or power off (3277).

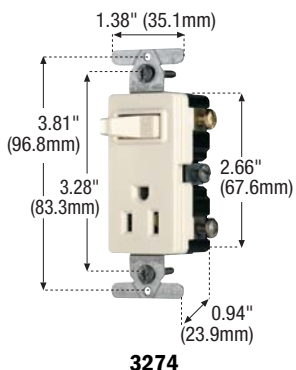


Single Pole Switch with Receptacle – Side Wire

Switch Rating	Receptacle Rating	Second Device Description	Color	Catalog No.
15A 120V/AC	15V 125V/AC	2P3W Grounding Receptacle	Almond	3274A
			Brown	3274B
			Ivory	3274V
			Light Almond	3274LA
			White	3274W

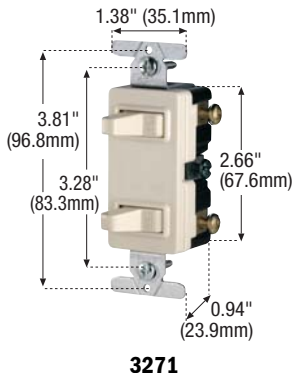

Single Pole Switch with Additional Switch – Side Wire

Switch Rating	Receptacle Rating	Second Device Description	Color	Catalog No.
15A 120/277V/AC	15A 120/277V/AC	Single Pole Switch	Almond	3271A
			Brown	3271B
			Ivory	3271V
			Light Almond	3271LA
			White	3271W
15A 120/277V/AC	15A 120/277V/AC	3-Way Switch	Almond	3275A
			Brown	3275B
			Ivory	3275V
			Light Almond	3275LA
			White	3275W

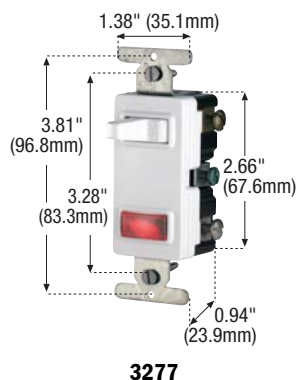

Single Pole Switch with Pilot Light – Side Wire

Switch Rating	Pilot Light Rating	Color	Catalog No.
15A 120V/AC	120V 75W	Almond	3277A
		Brown	3277B
		Ivory	3277V
		Light Almond	3277LA
		White	3277W

INDUSTRIAL
COMMERCIAL
RESIDENTIAL

B-9
DECORATOR
DEVICES

TESTING & CODE COMPLIANCE

- UL Listed (file no. E18704),
- Meet all CSA requirements C22.2 no. 42 and 111, certified, (file no. 10016 (6241-05)) for switches and pilot lights, (file no. 6914 (6233-01)) for receptacles
- NOM Certified

MATERIAL CHARACTERISTICS

Meets flammability requirements per UL94, V2 rated.
Temperature Rating:
-20°C to 60°C.

Decorator Commercial Specification Grade Combination Devices

AC Quiet Switches
15A 120V/AC
15A 120/277V/AC



INDUSTRIAL
COMMERCIAL
RESIDENTIAL

B-10
DECORATOR
DEVICES

TESTING & CODE COMPLIANCE

- UL Listed, (file no. E18704)
- Meet all CSA requirements, C22.2 no. 42 and 111, (file no. 6914 (6233-04)) for receptacles, (file no. 10016 (6241-05)) for switches
- NOM Certified

MATERIAL CHARACTERISTICS

Temperature Rating:
-40°C to 60°C.


Decorator Combination Devices

FEATURES

- Combination switch with additional switch has 120/277V/AC rating ideal for fluorescent lighting fixtures typical in commercial applications.
- Switches have break-off provision for wiring both devices on same circuit or on separate circuits.
- Receptacles have triple wipe line contacts and double wipe ground contacts to insure long-term plug retention.
- Grounding terminal screw standard.
- 0.050" (1.27mm) thick steel mounting strap zinc-plated for corrosion resistance.
- Combination slot/Phillips head mounting and terminal screws ease installation with power screwdrivers.
- Terminal screws backed out – ready for wiring.
- Side wire terminals accept up to #10 solid or stranded wire.

Three-Way Switch with Receptacle – Side Wire


Switch Rating	Receptacle Rating	Second Device Description	Color	Catalog No.
15A 120V/AC	15V 125V/AC	2P3W Grounding Receptacle	Almond	3293A
			Brown	3293B
			Ivory	3293V
			Light Almond	3293LA
			White	3293W

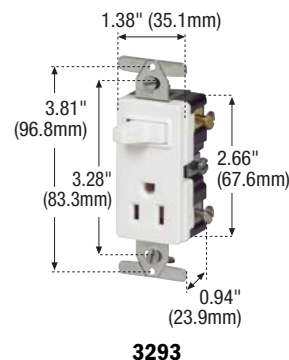

3293

Three-Way Switch with Additional Switch – Side Wire


Switch Rating	Additional Switch Rating	Additional Switch Description	Color	Catalog No.
15A 120/277V/AC	15A 120/277V/AC	3-Way Switch	Almond	3276A
			Brown	3276B
			Ivory	3276V
			Light Almond	3276LA
			White	3276W

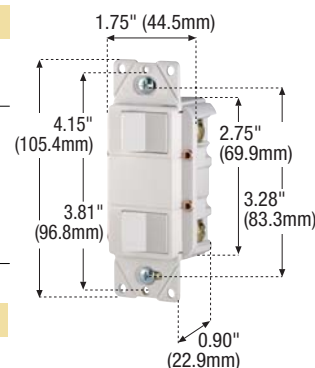

3276

Single Pole Double and Triple Combination Switches - Side Wire and Push Wire

Switch Rating	Description	Color	Catalog No.
15A 120V/AC	2 Single Pole Switches	Almond	3282A
		Ivory	3282V
		Light Almond	3282LA
		White	3282W
15A 120V/AC	3 Single Pole Switches	Almond	3283A
		Ivory	3283V
		Light Almond	3283LA
		White	3283W

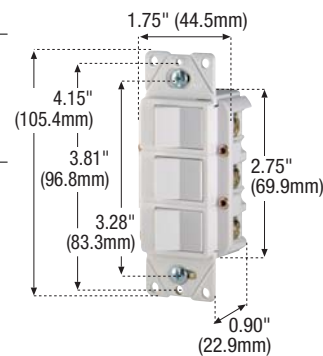

3283