

PLS 5.5W HYB GX23 TITANIUM LED SERIES



PL:EDGE
SERIES

PRO




5.5W REPLACES



13W
CFL

60% Energy Savings

- HYBRid installation - DIReCT or BYPass
- Compatible with magnetic ballasts - DIReCT installation
- Built-in universal voltage driver - BYPass installation
- Exceptional efficacy 91 LPW
- Lasts 4 times longer than CFL
- Suitable for use in totally enclosed fixtures



LM 79

LM 80

TM 21



COMPACT FORM FACTOR AND ROTATABLE BASE SUITABLE FOR ALL APPLICATIONS



PLS 5.5W HYB GX23 TITANIUM LED SERIES



APPLICATIONS


Office




Hospitality



General

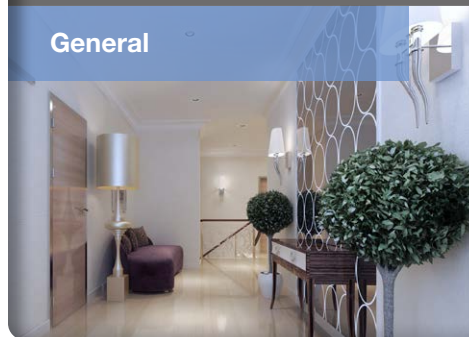

Base: GX23 (2-pin CFL)
Voltage: Magnetic ballast compatible
 120-277V
Dimmable: No
PF: 0.9
Lifetime: 40,000 hrs
Weight: 0.08lb / 38g

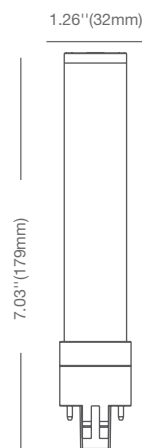

Note: Product designed to replace 13W Single Twin Tube CFL. For Double Twin Tube CFL replacement, please check fixture compartment dimensions to ensure compatibility.

SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
5.5PLS/827/HYB/GX23	57820	5.5	Soft White 2700K	80	450	82	120°
5.5PLS/830/HYB/GX23	57821	5.5	Warm White 3000K	80	500	91	120°
5.5PLS/835/HYB/GX23	57822	5.5	Neutral White 3500K	80	500	91	120°
5.5PLS/840/HYB/GX23	57823	5.5	Cool White 4000K	80	520	95	120°

* Suitable for use in totally enclosed fixtures

** Suitable for damp locations. Not for use where directly exposed to weather or water

*** Full installation guide and more details available on website

Ref.#DS105-PLS-5.5W-HYB-GX23