




DECORA® SWITCHES 15 AMP 120 and 120/277V

Residential Grade Switches

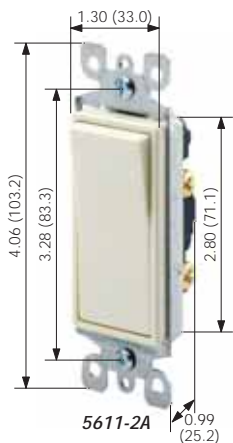

Decora AC Quiet Rocker Switches

Quickwire® and Side Wired Illuminated 15 AMP 120/277V AC
(Illuminated when load is OFF—Does not require a neutral wire)

DESCRIPTION	CAT. NO.	COLOR*
Single-Pole	5611-I	Ivory
	5611-W	White
	5611-2A	Almond
	5611-2T	Light Almond
Three-Way	5613-I	Ivory
	5613-W	White
	5613-2A	Almond
	5613-2T	Light Almond
Four-Way	5614-2I	Ivory
	5614-2W	White
	5614-2A	Almond
	5614-2T	Light Almond

Note: To order Decora rocker switches with grounding screw add suffix -2 (e.g. - 5611-2I)

Quickwire and Side Wired Pilot Light 15 AMP 120V AC
(Illuminated when load is ON—Requires a neutral wire)

DESCRIPTION	CAT. NO.	COLOR*
Single-Pole	5618-2	I, W, A, T

Quickwire and Side Wired Imprinted 15 AMP 120/277V AC

DESCRIPTION	STOCK MESSAGES AVAILABLE	CAT. NO.	COLOR*
Single-Pole, Stock or Custom Imprinted	FAN, DISPOSAL, OIL BURNER	5601-Z2	I, W

Quickwire and Side Wired Molded 15 AMP 120/277V AC

DESCRIPTION	CAT. NO.	COLOR*
Single-Pole ON/OFF Molded in Rocker	5601-X2	I, W, A, T, E

911 Flasher Switch

500 WATTS 120V

DESCRIPTION	CAT. NO.	COLOR*
3-Position Emergency Flasher Rocker Switch	911	I, W, A

Wallplates

THERMOSET				ALUMINUM	
80401-W	80409-W	80601-I Midway Size	80609-I Midway Size	83401	83409

For complete Decora wallplate selection, see pages B20–B24.

SPECIFICATIONS AND FEATURES

- Illuminated Switch rocker illuminated when load is OFF
 - Pilot Light switch rocker visible when ON even in bright light
 - Switch border shields against dust and fits in wallplate to prevent rocker binding
 - Side-wiring terminals accept both solid and stranded wire to ease installation
 - Full rated current capacity with tungsten, fluorescent or resistive loads. Motor capacity is 80% of switch rating
 - Conform to all NEMA standard specifications
- Imprinted Decora Switches**
- Stock Decora switches available with choice of three imprints on rocker: FAN, DISPOSAL, OIL BURNER

911 Switch

- 911 Switch provides standard ON/OFF control plus a special illuminated FLASH function will flash controlled lighting ON and OFF at one-second intervals
- Replaces standard single-pole switch—flash function alerts neighbors and helps emergency personnel locate a house quickly

TESTING AND CODE COMPLIANCE

- UL Listed (File #E-7458)
- CSA Certified (File #LR-3413)
- NOM Certified (#057)
- Backed by a Limited Two-Year Warranty

*COLOR

For color choice add suffix as follows: Ivory (-I), White (-W), Almond (-A), Light Almond (-T).

HORSEPOWER

15A
1/2 @120V
2 @ 240V

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating
Operating Temperature: -40°C to 120°C