


Product data sheet

Specifications

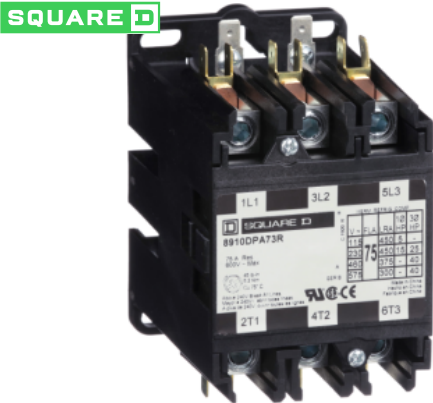

Contactor, Definite Purpose, 75A, 3 pole, 40 HP at 575 VAC, 3 phase, 208/240 VAC 60 Hz 220 VAC 50 Hz coil, open

8910DPA73RV09

Product availability : Non-Stock - Not normally stocked in distribution facility

Price* : 318.00 USD

Main

Product or Component Type	Definite Purpose Contactor
Line Rated Current	75 A
Number of Poles	3P
Pole contact composition	3 NO
Range of Product	DPA

Complementary

Maximum Horse Power Rating	5 hp 115 V AC, 1 phase 15 hp 230 V AC, 1 phase 25 hp 230 V AC, 3 phase 40 hp 460 V AC, 3 phase 40 hp 575 V AC, 3 phase
Locked rotor rated current	450 A 277 V AC 375 A 460 V AC 300 A 575 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	208...240 V AC 60 Hz 220 V AC 50 Hz
Phase	3 phase
Electrical Connection	Quick connect terminals Box lugs
Height	3.65 in (92.8 mm)
Width	4.10 in (104.03 mm)
Depth	2.56 in (65 mm)

Environment

Product Certifications	UL Recognized CSA
------------------------	----------------------

Ordering and shipping details

Category	21347 - 8910 DPA 7_(70 AMP)
Discount Schedule	CP1B
GTIN	785901768371

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Nbr. of units in pkg.	1
Package weight(Lbs)	24.00 oz (680.4 g)
Returnability	Yes

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	4.06 in (103 mm)
Package 1 width	3.35 in (85 mm)
Package 1 Length	3.66 in (93 mm)

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.

Contractual warranty

Warranty	18 months
----------	-----------