



Color: Bronze

Weight: 13.2 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	1.50A
208V	0.80A
240V	0.70A
277V	0.06A
Input Watts	149.17W

LED Info

Watts	150W
Color Temp	4000K (Neutral)
Color Accuracy	70 CRI
L70 Lifespan	100,000 Hours
Lumens	21,204
Efficacy	142.1 lm/W

Technical Specifications**Compliance****UL Listed:**

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PL7C2E05FQ0M

Electrical**Driver:**

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 1.50A, 208V: 0.70A, 240V: 0.70A, 277V: 0.60A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

3.85% at 120V, 9.26% at 277V

Power Factor:

99.8% at 120V, 93.2% at 277V

Surge Protection:

10kV

Performance**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Construction**IES Classification:**

The Type IV distribution (also known as a Forward Throw) is especially suited for mounting on the sides of buildings and walls, and for illuminating the perimeter of parking areas. It produces a semicircular distribution with essentially the same candlepower at lateral angles from 90° to 270°.

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Lens:

Polycarbonate lens

Housing:

Die-cast aluminum housing, lens frame and mounting arm

Technical Specifications (continued)

Construction

IP Rating:

Ingress protection rating of IP65 for dust and water

Vibration Rating:

3G vibration rating per ANSI C136.31

EPA:

- 1 Fixture: 0.46
- 2 Fixtures at 90°: 0.60
- 2 Fixtures at 180°: 0.93
- 3 Fixtures at 90°: 0.93
- 4 Fixtures at 90°: 0.93

EPA with Slipfitter & Adjustable Arm Mounting Accessories (Sold Separately)

- 1 Fixture: 0.66
- 2 Fixtures at 90°: 0.80
- 2 Fixtures at 180°: 1.32
- 3 Fixtures at 90°: 1.32
- 4 Fixtures at 90°: 1.32

Mounting:

Universal mounting arm compatible for hole spacing patterns from 1" to 5 1/2" center to center. Round Pole Adaptor plate included as a standard. Easy slide and lock to mount fixture with ease. Round pole diameter must be >4" to mount fixtures at 90° orientation.

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

LED Characteristics

LEDs:

Long-life, high-efficiency, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Other


5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

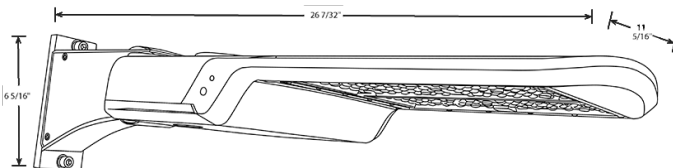

Features

- 0-10V Dimming, standard
- 100,000-hour LED lifespan
- 5-Year, Limited Warranty

Ordering Matrix

Family		Distribution	Wattage/Lumens	Mounting	Color Temp	Driver	Options
A17	-	4T	150		N		
		3T = Type III	70 = 70W/10,000LM	Blank = Universal Pole Mount	Blank = 5000K Cool	Blank = 120-277V, 0-10V	Blank = No Option
		4T = Type IV	100 = 100W/15,000LM	SF = Slipfitter (Factory installed	N = 4000K Neutral	Dimming	/3PRS = 3-pin Receptacle and
		5T = Type V	150 = 150W/22,500LM	SF available in 150W)		/480 = 480V, 0-10V	Shorting Cap
			200 = 200W/30,000LM			Dimming ¹	/7PRS = 7-pin Receptacle and
			240 = 240W/36,000LM				Shorting Cap
			300 = 300W/45,000LM				/MVS = Microwave Motion
			375 = 375W/51,800LM				Sensor
							/LC = Lightcloud® Controller

¹ 480V driver available standard on 150W and 300W and by special order on 100, 240 and 375W. Not available on 70W or 200W models.

Type II distribution available as special order

Wall mount and adjustable universal pole mount available as optional field-installed accessories