



UPC: 019813833910



Color: White

Weight: 0.7 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Performance

Product Type:

A-Line

Input Wattage:

23.5W

Lumens (Nominal):

3050lm

Efficacy:

127 lm/W

Color Accuracy (CRI):

80 CRI

L70 Lifespan:

40,000 Hours

Dimmable:

No

Construction

Bulb Shape:

A23 E26

Base Type:

E26

Beam Angle:

230°

For Use Outdoors in Open Fixtures:

No

Other
Equivalency:

200WW Incandescent

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Technical Specifications (continued)

LED Characteristics

Color Temperature:

4000K Cool White

Electrical

THD:

≤25%

Power Factor:

>0.9

Operating Temperature:

-20°C - 45°C (-4°F - 113°F)

Input Voltage:

120-277V AC

Operating Frequency:

60 Hz

Input Current @ 120V:

249mA

Input Current @ 277V:

108mA

Compliance

UL Listed:

Yes

UL Classified:

Yes

CEC Status:

Not lawful for sale in California

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified


Energy Star ID:

2341114

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	10.8	7.5	14.4
PALLET	864	44.9	47.3	44.5

Dimension

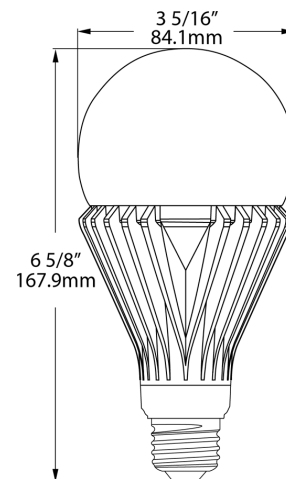

Features

- Replacement for High output incandescent or Metal Halide and High Pressure Sodium HID Lamps
- Commercial Grade
- Large metal heatsink for optimal heat dissipation
- In HID retrofit applications - Integral Driver enables lamp to be wired directly to line voltage. Must bypass ballast
- Rated for use in enclosed and open fixtures in dry or damp locations
- Ideal for post top, bollards, and outdoor corridor lighting
- Environmentally friendly, no mercury used
- UL Listed, ENERGY STAR Compliant
- Non-Dimmable
- Universal Voltage 120 through 277V
- 50,000 hour Lifespan

5 Year No Compromise Warranty

Ordering Matrix

Family		Lamp Power		Base Type		CRI/Color Temp		Dimmable	Voltage
A23	–	24	–	E26	–	840	–	ND	120–277V
		17 = 17W 23 = 23W 24 = 24W 32 = 32W		E26 = E26		830 = 80 CRI, 3000K 840 = 80 CRI, 4000K 850 = 80 CRI, 5000K		ND = Non-dimmable	120–277V = 120-277V