


Squeeze Connectors Malleable Iron for Flex



AFC FITTINGS • AC/MC CABLE, FLEX

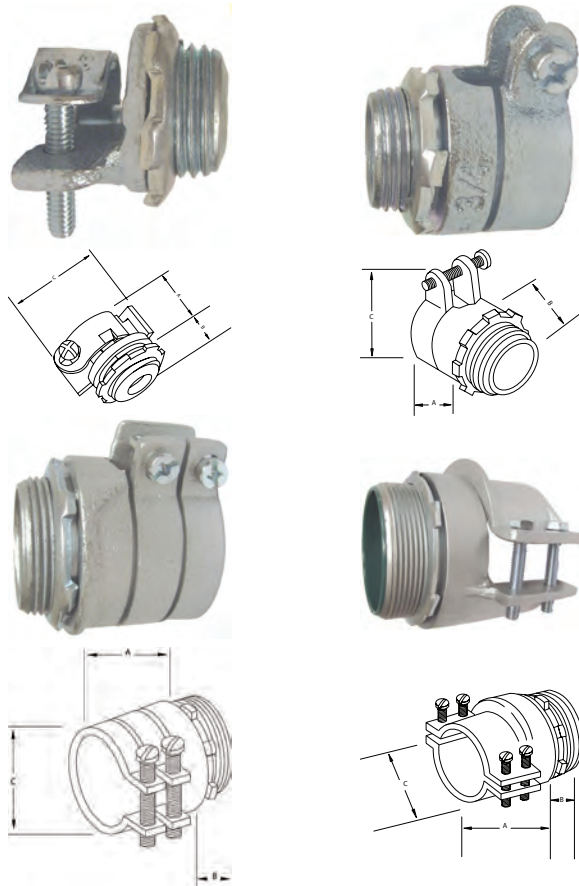

Applications

For armored cable, flexible metal conduit, interlocked metal clad cables, HCF cables

Features

- Male hub threads - NPSM
- RoHS compliant

Standard Materials: Malleable Iron, Steel Locknut

Standard Finish: Zinc Plated
>2½" to 4" zinc plated & painted

Applicable Third Party Standards

- UL Standard: 514B
- Fed. Spec. A-A-50552
- NEMA: FB-1
- UL Listed File # E164166, E164116

Product Code	Catalog Number	Weight per/C	Trade Size	KO Size	Dimensions in Inches			Carton Count	
					A	B	C	Inner	Master
Squeeze Connectors Malleable Iron for Flex									
0121-24-00	AFC380	5.6	⅜"	½"	1.000	0.438	1.625	25	125
0132-24-00	AFC500	13.3	½"	½"	1.000	0.438	1.625	25	125
0133-20-00	AFC750	16.7	¾"	¾"	1.125	0.500	1.750	20	100
0134-10-00	AFC100	25.9	1"	1"	1.125	0.563	2.125	10	50
0135-10-00	AFC125	39.8	1¼"	1¼"	1.188	0.563	2.188	10	50
0136-05-00	AFC150	63.0	1½"	1½"	1.875	0.625	2.250	5	25
0137-05-00	AFC200	107.2	2"	2"	2.000	0.750	2.688	-	5
0138-05-00	AFC250	171.9	2½"	2½"	2.063	0.875	3.313	-	5
0139-05-00	AFC300	202.6	3"	3"	2.125	1.063	3.875	-	5
0140-01-00	AFC350	442.0	3½"	3½"	3.750	1.313	6.500	-	1
0141-01-00	AFC400	663.0	4"	4"	4.125	1.500	7.250	-	1
With Insulated Throat									
0131-24-00	AFCI380	5.7	⅜"	½"	1.000	0.500	1.625	25	125
0142-24-00	AFCI500	13.4	½"	½"	1.000	0.500	1.625	25	125
0143-20-00	AFCI750	16.9	¾"	¾"	1.125	0.563	1.750	20	100
0144-10-00	AFCI100	26.2	1"	1"	1.125	0.625	2.125	10	50
0145-10-00	AFCI125	40.2	1¼"	1¼"	1.188	0.625	2.188	10	50
0146-05-00	AFCI150	63.6	1½"	1½"	1.875	0.688	2.250	5	25
0147-05-00	AFCI200	108.2	2"	2"	2.000	0.813	2.688	-	5
0148-05-00	AFCI250	173.6	2½"	2½"	2.063	0.938	3.313	-	5
0149-05-00	AFCI300	204.6	3"	3"	2.125	1.125	3.875	-	5
0150-01-00	AFCI350	446.4	3½"	3½"	3.750	1.375	6.500	-	1
0151-01-00	AFCI400	669.6	4"	4"	4.125	1.563	7.250	-	1