




GENERAL PURPOSE RELAYS




RC-PRD3



RC-PRD5



RC-PRD7



RC-PRD11

PART NO.	COIL VOLTS	AMPS	CONTACT ARRANGEMENTS
RC-PRD3AYO-240	240*	25 AMPS @ 277VAC 1HP @ 120VAC 2HP @ 250VAC	SPST - NO - DM Single Pole, Single Throw
RC-PRD5AYO-24	24*	10 AMPS @ 600VAC 7AMPS @ 50VDC RES.	SPDT Single Pole, Double Throw
RC-PRD7AYO-24	24*	25 AMPS @ 240VAC 20 AMPS @ 277VAC 1HP @ 120VAC 2HP @ 250VAC	DPST - NO Double Pole, Single Throw Normally Open
RC-PRD7AYO-240	240*	7AMPS @ 50VDC RES. 10 AMPS @ 600VAC * Stock Delivery	DPDT Double Pole, Double Throw
RC-PRD11DYO-110	110 DC		(DC) (DC)
W199X13 "DC" Same as PRD11DYO 24	24*	40 AMPS, 300 VAC/28VDC 5AMPS, 480/600 VAC 1.5HP EA. POLE @ 120-600VAC	
W199X14 "DC" Same as PRD11DYO-110	110 DC	2HP SW 2 POLE @ 200-600VAC 10A TUNG. 120V 50/60 HZ	

DUST COVER ENCLOSURES

FOR CONTACTORS

AHK-425A

Fits DPC/ACC, and most other 20-60 amp contactors.
Plus many other small frame units.

- 1...7/8, 1 1/8, and 1 3/4 Knockouts on each end.
- 4...7/32 Dia. Holes on 3.25" x 5.25".
- Size...
6-3/8"L x 4-15/16"W x 3-3/4"H
- 2.2 lbs each
- Hardware Included.




FOR PRD SERIES RELAYS

RC35DO13

Base and Cover made of Heavy sheet metal.

- 4...1/2" Knockouts for .5" dia. Conduit.
- 3...#10 Holes on 1.875" x 4.125" Centers.
- Size...
5-5/16 L x 3-3/8 W x 3-1/8 H
- 1.16 lb. each.
- Hardware Included.

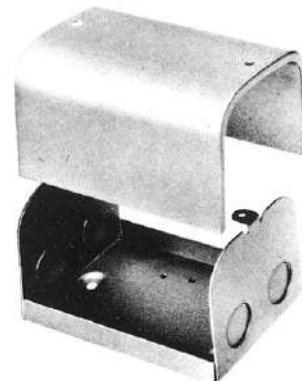

2170
Smithtown Avenue

RELAY AND CONTROL CORP.

Ronkonkoma
New York 11779