

ARUH | OXFORD™

COMMERCIAL AND RESIDENTIAL UNIT HEATER



OXFORD™
SERIES | SÉRIE



A VERSATILE WORKHORSE

The ARUH unit heater is small on price and big on heat. These heavy-duty units are well suited to situations where large amounts of heat must be provided in wide open spaces such as garages, workshops, commercial warehouses and construction sites. This unit has a powerful output up to 5000 W with a voltage of 240/208. The ARUH has adjustable louvers that allow you to direct heat right from the source. With or without a built-in thermostat, it provides instant heat. Quiet, lightweight and easy-to-install with a universal wall or ceiling mounting bracket, this unit heater is everything you expect for less. Guaranteed productivity!

INSTANT HEAT

ADJUSTABLE LOUVERS ALLOW YOU TO DIRECT HEAT

WALL OR CEILING INSTALLATION SUPPORT BRACKET INCLUDED

ENCLOSED AND PERMANENTLY LUBRICATED MOTOR

2 KW TO 5 KW MODELS AVAILABLE

COLOR

- charcoal

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet
- totally enclosed and factory lubricated motor
- 350 CFM quiet helicoidal fan
- adjustable louvers
- thermal protection with automatic reset

ELEMENT

- nichrome element produces instant heat

CONTROL

- built-in thermostat (included with T series)
- wall thermostat (not included)

INSTALLATION

- wall or ceiling mounted with universal mounting bracket (included with unit)

WARRANTY

- three years

IDEAL FOR:

construction site, garage, workshop, small commercial space

°STELPRO

°STELPRO reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-color products. For all the latest models and prices, please refer to our website at www.stelpro.com.




FC_RUH_US_161019



TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN THERMOSTAT	24 V CONTROL	POWER		PHASE	FLOW	VOLTAGE	THROW DISTANCE	HEAT RISE	WEIGHT
CODE	CODE	CODE	WATTS	BTU/H	NB	CFM	VOLTS	FT.	°F	LB
ARUH2CHAR	ARUH2TCHAR	ARUH2C24CHAR	2000/1500	6825/5119	1	350	240/208	10	48	20
ARUH3CHAR	ARUH3TCHAR	ARUH3C24CHAR	3000/2250	10 238/7679	1	350	240/208	10	60	20
ARUH4CHAR	ARUH4TCHAR	ARUH4C24CHAR	4000/3000	13 651/10 238	1	350	240/208	10	82	20
ARUH5CHAR	ARUH5TCHAR	ARUH5C24CHAR	5000/3750	17 064/12 798	1	350	240/208	10	114	20

TECHNICAL DRAWINGS

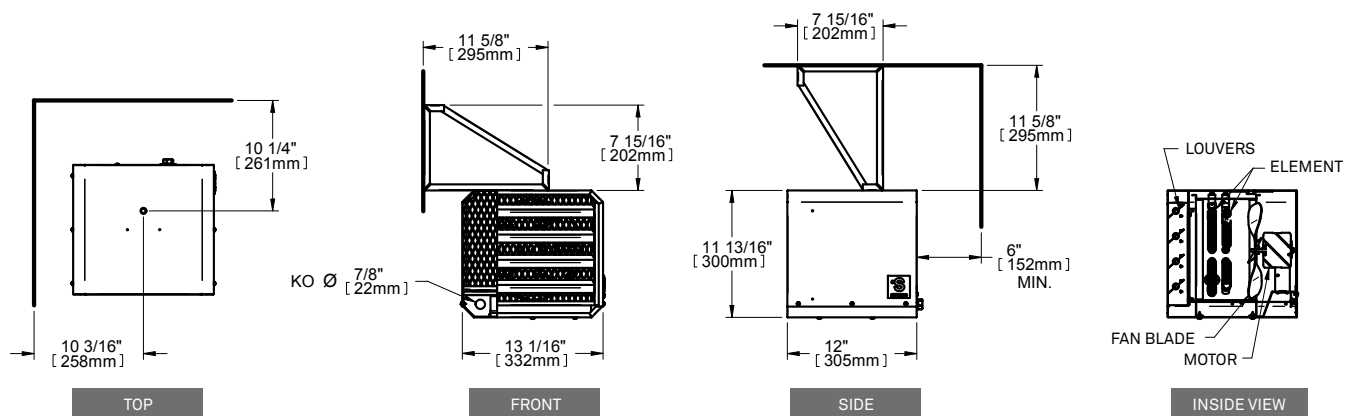

°STELPRO reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-color products.
For all the latest models and prices, please refer to our website at www.stelpro.com.