

Project:	Туре:
Prepared By:	Date:

recnnicai	Specifications	5

**Performance** 

**Product Type:** 

Reflector

Input Wattage:

8.5W

Lumens: 650lm

Efficacy: 76lm/W

L70 Lifespan:

15,000-Hour LED lifespan based on IES LM-70 results

65W Incandescent

Compliance

**UL Listed:** 

Suitable for damp locations

Wattage Equivalency:

**Enclosed Fixtures:** 

Suitable for use in enclosed fixtures

**LED Characteristics** 

**Color Temperature:** 

3000K

Color Accuracy (CRI):

80 CRI

Beam Angle:

120°

**Electrical** 

**Power Factor:** 

0.7

Dimmable:

Yes

**Operating Temperature:** 

-20°C to 45°C (-4°F to 113°F)

Input Voltage:

120V

**Operating Frequency:** 

60 Hz

Construction

**Bulb Shape:** BR30 ECO 6PK

Installation

Base Type:

E26 Edison

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.




## **Minimum Compartment Size**

Length x Width x Height [in]	Lamp Quantity	
20	6	

## **Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	24	0	0	0
PALLET	720	45.47	41.34	41.34

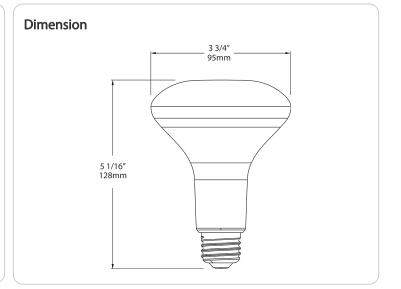

## **Features**

Energy efficient replacement for incandescent and halogen reflector lamps

Constructed from durable plastic which lowers risk of breakage

Rated for use in enclosed and open fixtures in dry or damp locations

Frosted lens produces smooth diffuse light

Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs

**ENERGY STAR Compliant** 

Dimmable with common dimmer types (see Dimmer Compatibility List)

## **Ordering Matrix**

