


Blend performance & comfort in a downlight.

C7L-DL-VB CALCULITE LED 7" ROUND DOWNLIGHT

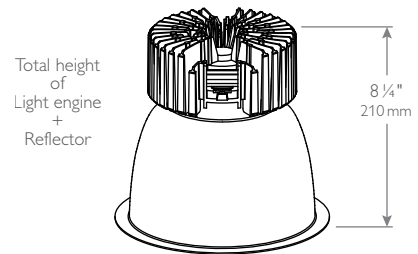

Complete product = Frame-in kit + Trim kit
Lumen package for the frame-in kit must match the trim kit.

PHILIPS LIGHTOLIER, CALCULITE, PROFESSIONAL-GRADE
DOWNLIGHTING, LED 7" ROUND APERTURE DOWNLIGHT,
NARROW MEDIUM & WIDE 1500/2000/3500/6000LM, C7L-DL-VB

Calculite LED 7" features an LED array of high brightness white light LEDs.
The new LED boards in Calculite LED ensure a less than 2-step SDCM color
variation between luminaires.

Project: _____
Location: _____
Catalog No: _____
Fixture Type: _____
Mfg: _____ Lamps: _____ Qty: _____
Notes: _____

Frame-in kit

example: C7L15NUVBZ10V

Series	Lumens	Installation	Input voltage	Version	Dimming	Options ¹
☐	☐	☐	☐	VB	☐	☐
C7L Calculite 7" LED round aperture	15 1500lm	N New construction R Remodeler	U Universal (120/277V)	VB Version B	Z10V 0-10V dimming LD Lutron driver	EM Emergency ⁴ LC Chicago Plenum
	20 2000lm 50 6000lm 35 3500lm	N New construction R Remodeler ²	1 120V 2 277V	VB Version B	Z10V 0-10V dimming LD Lutron driver	EM Emergency ⁴ LC Chicago Plenum ⁵
C7L Calculite 7" LED round aperture (347v configurations)	15 1500lm 50 6000lm 35 3500lm	N New construction R Remodeler	1 120V 2 277V ⁷	VB Version B	Z10V 0-10V dimming	-347 347V ⁶
CUL Calculite LED Universal aperture	15 1500lm	J J-box mount retrofit	U Universal (120/277V)	VB Version B	Z10V 0-10V dimming Existing wiring will determine if dimming is an option.	
	20 2000lm	J J-box mount retrofit	1 120V 2 277V	VB Version B	Z10V 0-10V dimming Existing wiring will determine if dimming is an option.	
	15 1500lm 20 2000lm	S Screw-in base retrofit	1 120V	VB Version B	Existing wiring will determine if dimming is an option.	

Trim kit

example: C7L1520DL35KWCCDPVB

Series	Lumens	Style	CCT	Beam	Reflector	Flange	Version ⁴
C7L	☐	DL	☐	☐	☐	☐	VB
C7L Calculite 7" LED round aperture	1520 1500, 2000, & 3500lm 50 6000lm	DL Downlight	27K 2700K 30K 3000K 35K 3500K 40K 4000K	N Narrow, 20° 0.3 s.c. ⁷ M Medium, 55° 0.8 s.c. W Wide, 70° 1.1 s.c.	CL Clear CCL Comfort clear CCD Comfort clear diffuse CCZ Champagne bronze WH White (painted)	W White (painted) P Polished (matches aperture) FT Flangeless (flush-mount) ^{1,3}	VB Version B

- Available for new construction (**N**) installation frame-in kits only.
 - Available for 2000 (**20**) lumen frame-in kits only.
 - Accessory **CA7FMR** required for gypsum applications (minimal 1/4" reflector flange).
 - Consult LED-EM spec sheet for **EM** option details and restrictions.
 - Chicago Plenum (**LC**) is not available for 6000 (**50**) lumen frame-in kits.
 - Consult factory for availability of other 347V (**-347**) fixture configurations.
 - Available for 6000 (**50**) lumen trim kits only.
- NOTE:** See page 3 for Energy Star® compatibility.




CA7FMR
Flangeless trim with plaster ring accessory.
(Recommended for gypsum installations)




PHILIPS
LIGHTOLIER

C7L-DL-VB CALCULITE LED 7" ROUND DOWNLIGHT

New Construction

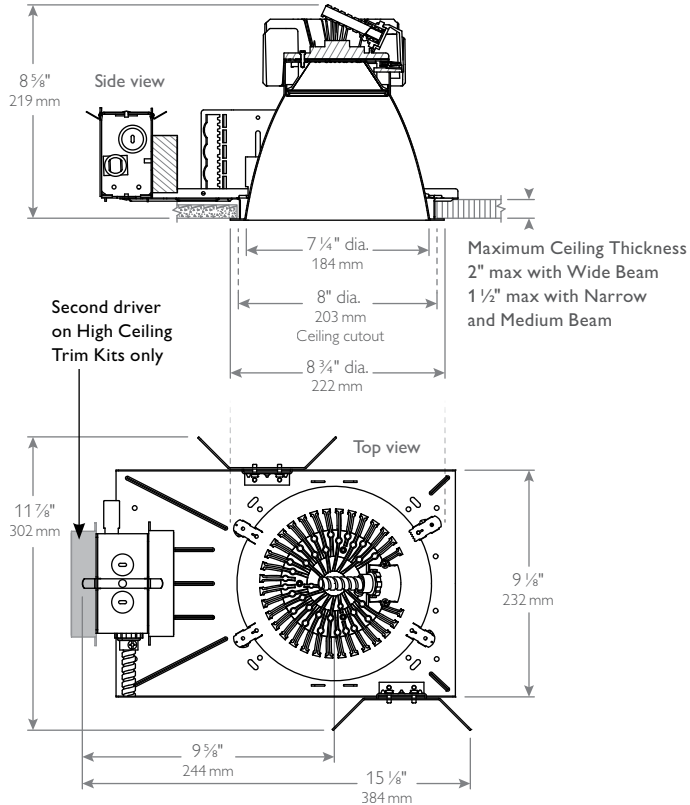

Remodeler

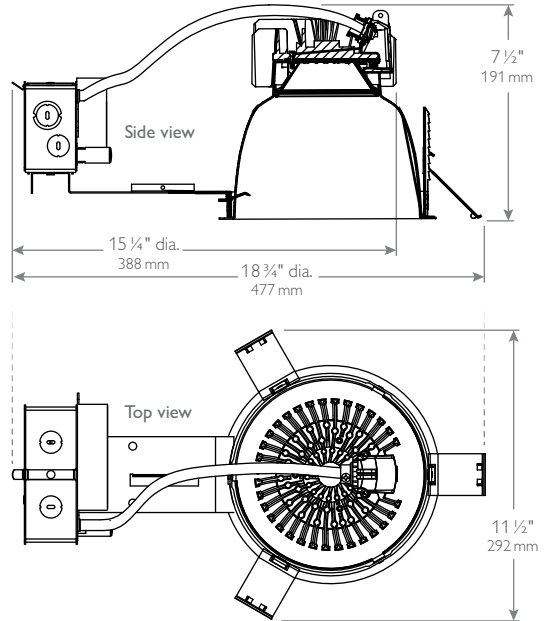

Frame-in kits

New construction

Mounting frame: Galvanized stamped steel for dry or plaster ceilings.

Vertical adjustment: Light engine adjusts in frame below ceilings up to 1 1/8".

Mounting brackets: Galvanized Steel. Adjustable through aperture. Use 3/4" or 1 1/2" lathing channel, 1/2" EMT or optional mounting bars.

Remodeler

Compatibility: Wide beam flanged downlight only.

Power pack: Swivel junction box for tight plenum spaces. Snap-off covers permits wiring from top.

Spring holder: Galvanized steel. Accepts up to 2 1/2" (64mm) ceiling thickness.

Retrofit

Compatibility: Wide beam downlight only.

Capability: Converts 6" (153mm) or 7" (178mm)

Lightolier incandescent frame-in kit without additional wiring using existing Calculite E26 base.

Socket cup support: Spun steel.

Holds Calculite incandescent socket cup.

Socket extender: Phenolic E26 base.

Connect to existing lampholder.


Quick-ship

Philips is committed to providing customers with the products they need when they need them.

Service Smart	Spec Smart
Two-day quick-ship	Two-week quick-ship
Frame-in kits	Frame-in kits
None available	C7L15NUVBZ10V C7L35N1VBZ10V
Trim kits	Trim kits
None available	C7L1520DL30KMCCLWVB C7L1520DL30KWCCCLWVB C7L1520DL35KMCCLWVB C7L1520DL35KWCCCLWVB

Quick-ship SKUs apply to the United States only.

Retrofit

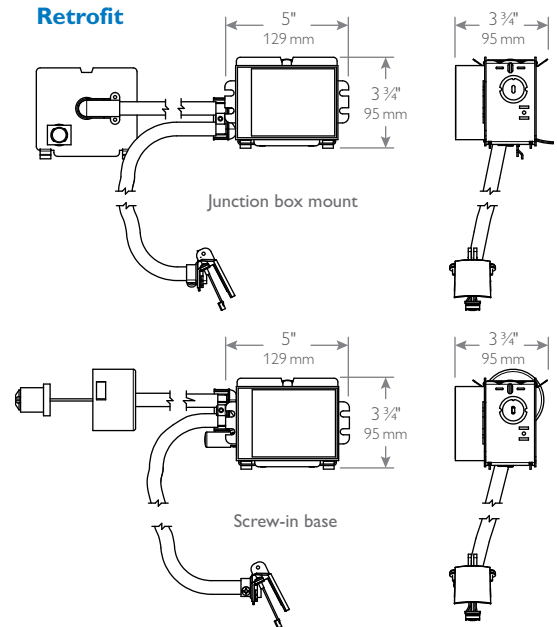

C7L-DL-VB


CALCULITE LED 7"

ROUND DOWNLIGHT

Calculite LED 7"

C7L1520DL35KWCCDPVB

Calculite LED 7" Trim kits are backwards compatible with all Calculite LED 7" Frame-in Kits.

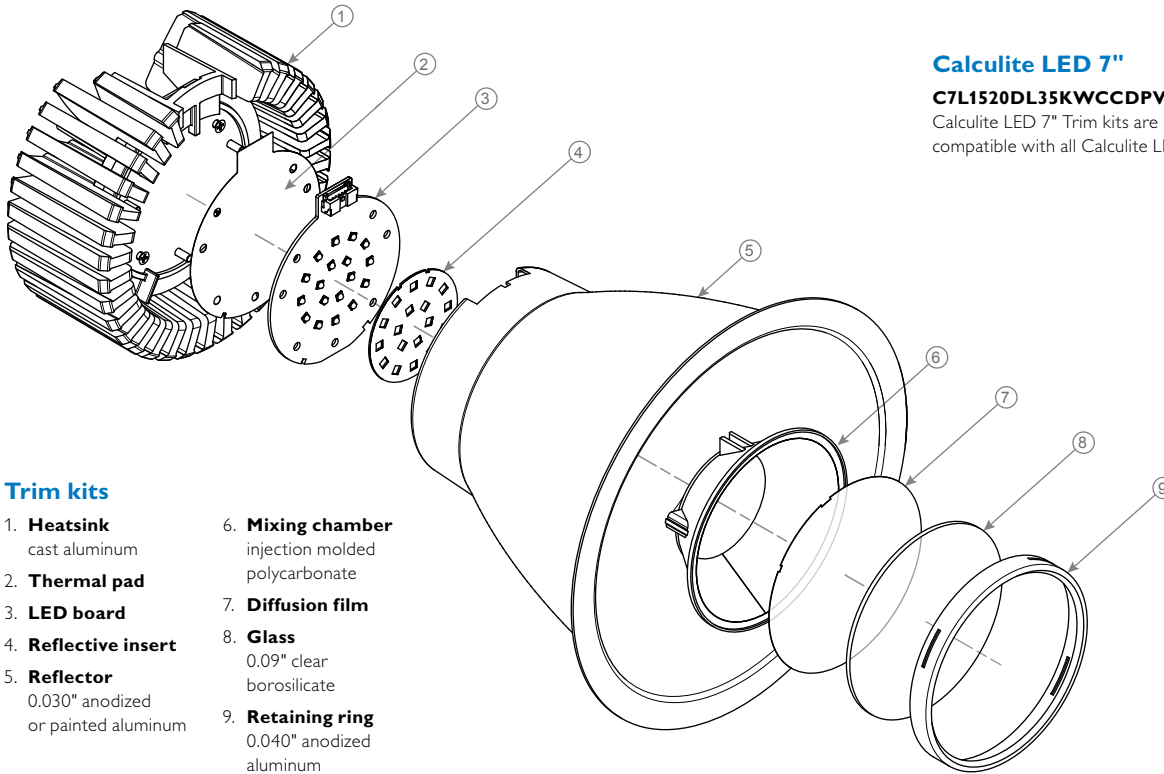

Trim kits

1. **Heatsink**
cast aluminum
2. **Thermal pad**
3. **LED board**
4. **Reflective insert**
5. **Reflector**
0.030" anodized
or painted aluminum
6. **Mixing chamber**
injection molded
polycarbonate
7. **Diffusion film**
8. **Glass**
0.09" clear
borosilicate
9. **Retaining ring**
0.040" anodized
aluminum

Features

Ceiling cutout: 7" aperture; 8" (203mm).
Depth: 8 1/4" (210mm) including light engine.
Power connection: Attaches to light engine via push-in connector (on frame). Removable cover provides access.
Junction box: UL listed for 8 No. 12 AWG, 90°C through branch circuit connectors. Allows inspection from below.
Thermal protector: Meets NEC & UL requirements. Do not install insulation above or within 3" of luminaire.
Thermal Management: Heat sink and thermal design along with the clean room assembly process ensures specified performance levels are maintained.

Options and accessories

Dimming capability: 0-10V or Lutron dimming. See LED-DIM specification sheet.
Emergency capability: Integral; Add "EM" suffix. See LED-EM spec sheet.
Sloped ceilings: Compatible with slope ceiling adaptors. See specification sheet SCA.
Round apertures require SCAHID accessory.
Mounting bars: 1950-18" (set of 2) 1951-27" (set of 2)
T-Bar anchor clips: 1956 (set of 4), for use with above.

ENERGY STAR®

All new construction (N) frame-in and trim kit configurations are certified except for the following:

- Trim Kits: Champagne bronze reflector finishes; C7L1520DL--KMCCZ..., C7L1520DL--KWCCZ...,
- All 3500 lumen (35) optics configurations.
- All 6000 lumen (50) optics configurations.
- All emergency (EM) configurations.
- All 347V configurations.

Electrical

Electronic power supply: 120 or 277V, 50/60Hz, enclosed, overload and short circuit protected, thermal regulation to protect against overheating, sound rating, "A", -20°C minimum starting temperature, 35°C maximum ambient environment.
Rated life: 60,000 hrs at 70% lumen maintenance based on IES LM-80-08 and TM-21-11 for 1500lm and 2000lm. 40,000 hours at 70% lumen maintenance (L70) for 3500lm.

Labels


cULus, I.B.E.W.
Suitable for wet locations.
5 year warranty.
ENERGY STAR® certified
(see exclusions to the left).

Frame-In kit	Input volts	Input freq.	Input current	LED drive current	Input power*	LED power	THD factor	Power factor
C7L15_VBZ10V 1500lm w/0-10V dimming	120V	50/60Hz	0.17A	350mA	21W	18W	<20%	>0.9
	277V	50/60Hz	0.08A	350mA	21W	18W	<20%	>0.9
C7L20_VBZ10V 2000lm w/0-10V dimming	120V	50/60Hz	0.26A	520mA	32W	26W	<20%	>0.9
	277V	50/60Hz	0.12A	520mA	33W	26W	<20%	>0.9
C7L35_VBZ10V 3500lm w/0-10V dimming	120V	50/60Hz	0.43A	850mA	51W	41W	<20%	>0.9
	277V	50/60Hz	0.19A	850mA	52W	41W	<20%	>0.9

* +/- 5%

C7L-DL-VB CALCULITE LED 7" ROUND DOWNLIGHT

Calculite LED 7" High Ceiling
C7L50DL35KWCCDPVB

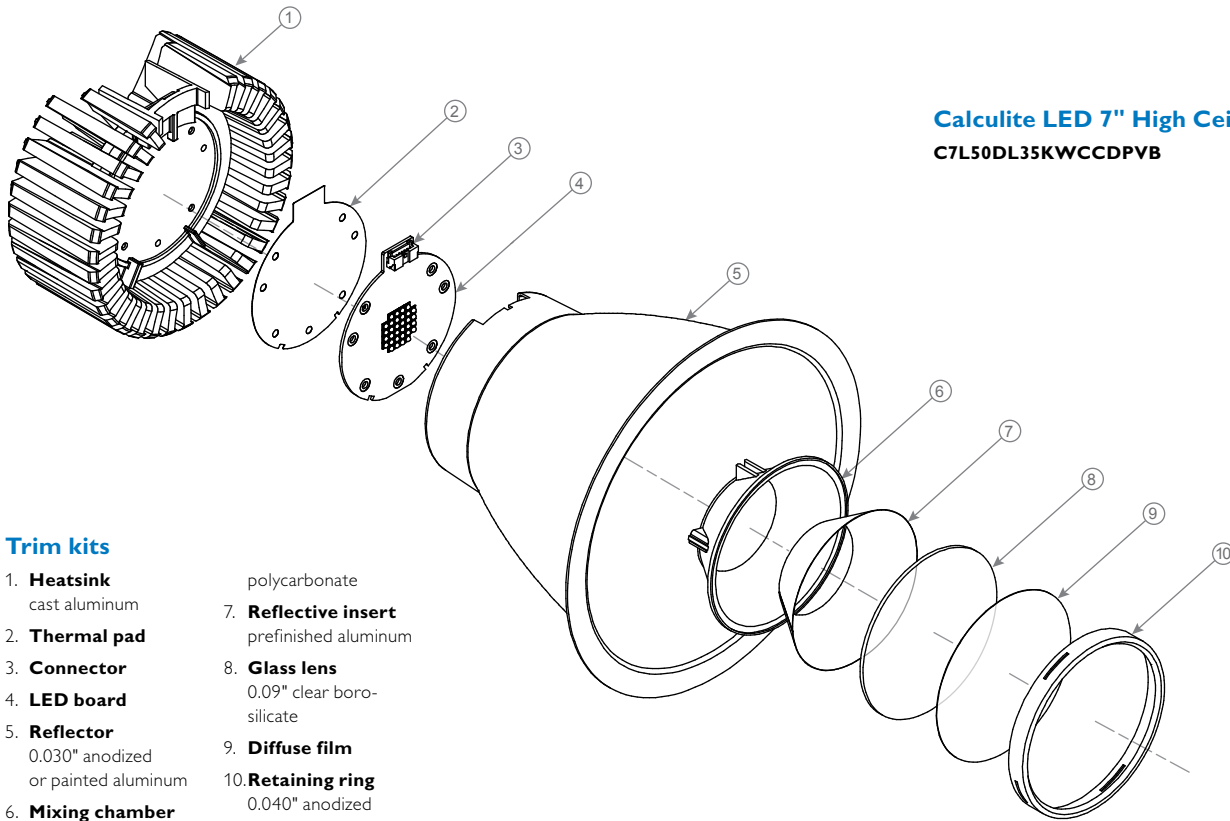

Trim kits

- | | |
|---|--|
| 1. Heatsink
cast aluminum | polycarbonate |
| 2. Thermal pad | 7. Reflective insert
prefinished aluminum |
| 3. Connector | 8. Glass lens
0.09" clear boro-silicate |
| 4. LED board | 9. Diffuse film |
| 5. Reflector
0.030" anodized
or painted aluminum | 10. Retaining ring
0.040" anodized
aluminum |
| 6. Mixing chamber
injection molded | |

Features

Ceiling cutout: 7" aperture; 8" (203mm).
Depth: 8 1/4" (210mm) including light engine.
Power connection: Attaches to light engine via push-in connector (on frame). Removable cover provides access.
Junction box: UL listed for 8 No. 12 AWG, 90°C through branch circuit connectors. Allows inspection from below.
Thermal protector: Meets NEC & UL requirements. Do not install insulation above or within 3" of luminaire.
Thermal Management: Heat sink and thermal design along with the clean room assembly process ensures specified performance levels are maintained.

Options and accessories

Dimming capability: 0-10V or Lutron dimming. See LED-DIM specification sheet.
Emergency capability: Inverter; See LED-LMI specification sheet. Integral; Add "EM" suffix. See LED-EM spec sheet.
Sloped ceilings: Compatible with slope ceiling adaptors. See specification sheet SCA. Round apertures require SCAHID accessory.
Mounting bars: 1950-18" (set of 2) 1951-27" (set of 2)
T-Bar anchor clips: 1956 (set of 4), for use with above.

Electrical

Electronic power supply: 120 or 277V, 50/60Hz, encased, overload and short circuit protected, thermal regulation to protect against overheating, sound rating. "A", -20°C minimum starting temperature, 35°C maximum ambient environment.
Rated life: 58,000 hrs at 70% lumen maintenance based on IES LM-80-08 and TM-21-11.


Labels

cULus, I.B.E.W.
 Suitable for wet locations.
 5 year warranty.

C7L-DL-VB CALCULITE LED 7" ROUND DOWNLIGHT

21W LED, 3500K, 55° Medium 1500 lumen

Candela Curve

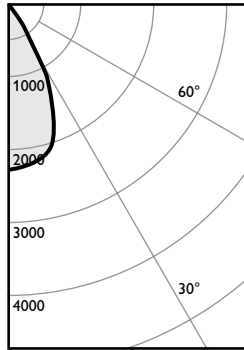

Frame: C7L15NUVBZ10V
Trim: C7L1520DL35KMCLWVB

CCT¹: 3500K
Output lumens: 1615 lms
Input watts²: 21.4 W
Efficacy: 75.2 lm/w
CRI: 80 min
Spacing Crit.: 0.8
Beam Spread: 55°
Report no³: 124GFR

Zonal summary

Zone	Lumens	%Luminaire
0-30	1371	85.2%
0-40	1580	98.1%
0-60	1609	99.9%
0-90	1610	100.0%

Angle	Mean CP	Lumens
0	2287	
5	2259	218
10	2213	
15	2096	574
20	1767	
25	1327	580
30	675	
35	318	209
40	119	
45	23	27
50	3	
55	2	2
60	1	
65	1	1
70	0	
75	0	0
80	0	
85	0	0
90	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	91	4.0'
6'	64	4.8'
7'	47	5.6'
8'	36	6.4'
9'	28	7.2'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	74.8	0.95
6'	49.1	0.62
7'	35.1	0.44
8'	29.2	0.37
9'	23.4	0.30

38'x38'x10' Room, Workplane 2 1/2' above floor, 80/50/20% Reflectances

Finish Adjust. factors

CL = 100%
CCL = 95%
CCD = 87%
CCZ = 63%
WH = 87%

CCT Adjust. factors


4000K = 103%
3500K = 100%
3000K = 97%
2700K = 87%

Coefficients of utilization

Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	95	95
1	114	112	109	107	109	105	105	102	102	99	99	93	99	99	93	89	89
2	109	105	101	98	103	97	100	95	97	90	95	88	92	87	84	84	84
3	104	99	94	91	97	90	95	88	92	87	84	82	88	82	79	75	75
4	100	93	88	84	92	84	90	83	88	82	79	75	84	77	71	67	67
5	95	88	83	79	87	78	85	78	84	77	71	67	76	69	67	64	64
6	91	83	78	74	82	74	81	73	80	73	67	61	70	62	61	58	58
7	87	79	74	70	78	70	77	69	76	69	67	64	72	65	64	61	61
8	84	75	70	66	74	66	73	66	72	65	64	61	69	62	61	58	58
9	80	71	66	62	71	62	70	62	69	62	61	58	66	59	58	55	55
10	77	68	63	59	68	59	67	59	66	59	58	55	64	57	56	53	53

21W LED, 3500K, 70° Wide 1500 lumen

Candela Curve

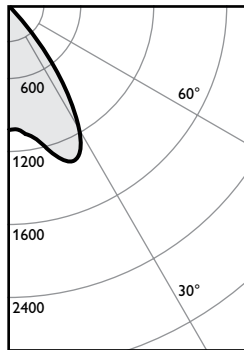

Frame: C7L15NUVBZ10V
Trim: C7L1520DL35KWCLWVB

CCT¹: 3500K
Output lumens: 1618 lms
Input watts²: 21.4 W
Efficacy: 75.5 lm/w
CRI: 80 min
Spacing Crit.: 1.1
Beam Spread: 70°
Report no³: 127GFR

Zonal summary

Zone	Lumens	%Luminaire
0-30	1053	65.2%
0-40	1530	94.7%
0-60	1612	99.8%
0-90	1615	100.0%

Angle	Mean CP	Lumens
0	1028	
5	1020	101
10	1081	
15	1206	347
20	1346	
25	1354	605
30	1155	
35	787	477
40	371	
45	39	79
50	6	
55	4	4
60	3	
65	2	2
70	1	
75	1	1
80	0	
85	0	0
90	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	41	5.5'
6'	29	6.6'
7'	21	7.7'
8'	16	8.8'
9'	13	9.9'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	73.3	0.95
6'	48.1	0.62
7'	34.4	0.44
8'	28.6	0.37
9'	22.9	0.30

38'x38'x10' Room, Workplane 2 1/2' above floor, 80/50/20% Reflectances

Finish Adjust. factors

CL = 100%
CCL = 95%
CCD = 87%
CCZ = 63%
WH = 87%

CCT Adjust. factors

4000K = 103%
3500K = 100%
3000K = 97%
2700K = 87%

Coefficients of utilization


Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	93	93
1	113	110	108	106	108	104	104	101	100	98	98	93	98	98	93	86	86
2	107	102	98	95	101	94	97	92	94	90	86	86	92	87	84	84	84
3	102	95	90	86	94	85	91	84	88	82	79	75	84	77	71	67	67
4	96	88	82	78	87	78	85	77	83	76	73	69	78	70	68	64	64
5	91	82	76	71	81	71	79	70	78	70	68	64	74	66	63	60	60
6	86	76	70	66	76	65	74	65	73	64	63	60	70	62	61	58	58
7	81	71	65	60	71	60	69	60	68	60	58	55	66	58	56	53	53
8	77	67	60	56	66	56	65	56	64	55	54	51	62	54	52	49	49
9	73	62	56	52	62	52	61	52	60	51	50	47	58	50	48	45	45
10	69	58	52	48	58	48	57	48	56	48	46	43	54	46	44	41	41

1. Correlated Color Temperature within specs as defined in ANSI_NEMA_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.
2. Wattage controlled to within 5%.
3. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.

C7L-DL-VB CALCULITE LED 7" ROUND DOWNLIGHT

32W LED, 3500K, 55° Medium 2000 lumen

Candela Curve

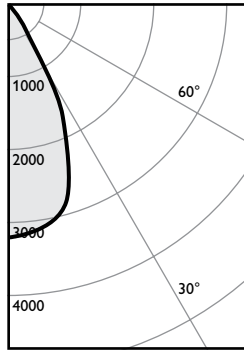

Frame: C7L20N1VBZ10V
Trim: C7L1520DL35KMCLWVB

CCT¹: 3500K
Output lumens: 2252 lms
Input watts²: 32.3 W
Efficacy: 69.5 lm/w
CRI: 80 min
Spacing Crit.: 0.8
Beam Spread: 55°
Report no³: 125GFR

Zonal summary

Zone	Lumens	%Luminaire
0-30	1913	85.2%
0-40	2204	98.1%
0-60	2245	100.0%
0-90	2246	100.0%

Angle	Mean CP	Lumens
0	3191	
5	3152	304
10	3089	
15	2925	801
20	2465	
25	1850	808
30	942	
35	443	291
40	166	
45	32	38
50	4	
55	3	2
60	2	
65	1	1
70	1	
75	0	0
80	0	
85	0	0
90	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	128	4.0'
6'	89	4.8'
7'	65	5.6'
8'	50	6.4'
9'	39	7.2'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	104.3	1.43
6'	68.5	0.94
7'	48.9	0.67
8'	40.8	0.56
9'	32.6	0.45

38'x38'x10' Room, Workplane 2 1/2' above floor, 80/50/20% Reflectances

Finish Adjust. factors

CL = 100%
CCL = 95%
CCD = 87%
CCZ = 63%
WH = 87%

CCT Adjust. factors


4000K = 103%
3500K = 100%
3000K = 97%
2700K = 87%

Coefficients of utilization

Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	95	95
1	114	112	109	107	109	106	105	102	102	99	99	95	97	93	89	89	89
2	109	105	101	98	103	97	100	95	95	88	88	84	92	87	84	84	84
3	104	99	94	91	97	90	95	88	88	82	82	78	88	82	78	78	78
4	100	93	88	84	92	84	90	83	83	77	77	73	84	77	73	73	73
5	95	88	83	79	87	78	85	78	78	73	73	69	80	73	69	69	69
6	91	83	78	74	83	74	81	73	73	68	68	64	76	69	64	64	64
7	87	79	74	70	78	70	77	69	69	64	64	60	72	65	60	60	60
8	84	75	70	66	75	66	73	66	66	61	61	57	69	62	57	57	57
9	80	71	66	63	71	62	70	62	62	57	57	53	65	58	53	53	53
10	77	68	63	59	68	59	67	59	59	54	54	50	61	54	50	50	50

32W LED, 3500K, 70° Wide 2000 lumen

Candela Curve

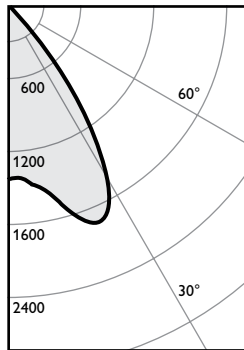

Frame: C7L20N1VBZ10V
Trim: C7L1520DL35KWCLWVB

CCT¹: 3500K
Output lumens: 2261 lms
Input watts²: 32.3 W
Efficacy: 69.9 lm/w
CRI: 80 min
Spacing Crit.: 1.1
Beam Spread: 70°
Report no³: 128GFR

Zonal summary

Zone	Lumens	%Luminaire
0-30	1472	65.2%
0-40	2138	94.7%
0-60	2253	99.8%
0-90	2257	100.0%

Angle	Mean CP	Lumens
0	1438	
5	1426	142
10	1511	
15	1687	485
20	1883	
25	1893	845
30	1614	
35	1099	666
40	517	
45	55	110
50	8	
55	6	5
60	4	
65	3	3
70	2	
75	1	1
80	0	
85	0	0
90	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	58	5.5'
6'	40	6.6'
7'	29	7.7'
8'	22	8.8'
9'	18	9.9'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	102.4	1.43
6'	67.2	0.94
7'	48.0	0.67
8'	40.0	0.56
9'	32.0	0.45

38'x38'x10' Room, Workplane 2 1/2' above floor, 80/50/20% Reflectances

Finish Adjust. factors

CL = 100%
CCL = 95%
CCD = 87%
CCZ = 63%
WH = 87%

CCT Adjust. factors

4000K = 103%
3500K = 100%
3000K = 97%
2700K = 87%

Coefficients of utilization


Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	93	93
1	113	110	108	106	108	104	104	101	101	98	98	94	99	93	89	89	89
2	107	102	98	95	101	94	97	92	92	88	88	84	92	87	84	84	84
3	102	95	90	86	94	85	91	84	84	80	80	76	86	80	76	76	76
4	96	88	82	78	87	78	85	77	77	73	73	69	80	73	69	69	69
5	91	82	76	71	81	71	79	70	70	66	66	62	74	67	62	62	62
6	86	76	70	66	76	65	74	65	65	61	61	57	69	62	57	57	57
7	81	71	65	61	71	60	69	60	60	56	56	52	64	57	52	52	52
8	77	67	60	56	66	56	65	56	56	52	52	48	60	54	48	48	48
9	73	62	56	52	62	52	61	52	52	48	48	44	56	50	44	44	44
10	69	58	52	48	58	48	57	48	48	44	44	40	51	44	40	40	40

1. Correlated Color Temperature within specs as defined in ANSI_NEMA_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.
2. Wattage controlled to within 5%.
3. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.

C7L-DL-VB CALCULITE LED 7" ROUND DOWNLIGHT

51W LED, 3500K, 55° Medium 3500 lumen

Candela Curve

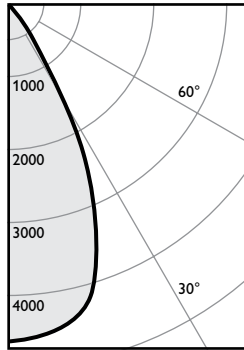

Frame: C7L35N1VBZ10V
Trim: C7L1520DL35KMCLWVB

CCT¹: 3500K
Output lumens: 3285 lms
Input watts²: 50.5 W
Efficacy: 64.9 lm/w
CRI: 80 min
Spacing Crit.: 0.8
Beam Spread: 55°
Report no³: 126GFR

Zonal summary

Zone	Lumens	%Luminaire
0-30	2791	85.2%
0-40	3217	98.2%
0-60	3274	99.9%
0-90	3276	100.0%

Angle	Mean CP	Lumens
0	4648	
5	4592	442
10	4502	
15	4263	1168
20	3597	
25	2702	1181
30	1381	
35	647	425
40	241	
45	46	55
50	6	
55	2	3
60	2	
65	1	1
70	1	
75	1	0
80	0	
85	0	0
90	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	186	4.0'
6'	129	4.8'
7'	95	5.6'
8'	73	6.4'
9'	57	7.2'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	152.2	2.24
6'	99.9	1.47
7'	71.3	1.05
8'	59.4	0.87
9'	47.6	0.70

38'x38'x10' Room, Workplane 2 1/2' above floor, 80/50/20% Reflectances

Finish Adjust. factors

CL = 100%
CCL = 95%
CCD = 87%
CCZ = 63%
WH = 87%

CCT Adjust. factors


4000K = 103%
3500K = 100%
3000K = 97%
2700K = 87%

Coefficients of utilization

Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	95	95
1	114	112	109	107	109	106	105	102	102	99	99	95	97	93	89	89	89
2	109	105	101	98	103	97	100	95	95	88	88	84	92	87	84	84	84
3	104	99	94	91	97	90	95	88	88	82	82	78	88	82	78	78	78
4	100	93	88	84	92	84	90	83	83	77	77	73	84	77	73	73	73
5	95	88	83	79	87	78	85	78	78	73	73	69	80	73	69	69	69
6	91	83	78	74	83	74	81	73	73	68	68	64	76	69	64	64	64
7	87	79	74	70	78	70	77	69	69	64	64	60	72	65	60	60	60
8	84	75	70	66	75	66	73	66	66	61	61	57	69	62	57	57	57
9	80	71	66	63	71	62	70	62	62	57	57	53	65	58	53	53	53
10	77	68	63	59	68	59	67	59	59	54	54	50	61	54	50	50	50

51W LED, 3500K, 70° Wide 3500 lumen

Candela Curve

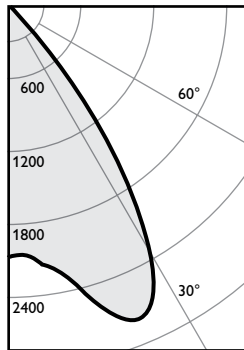

Frame: C7L35N1VBZ10V
Trim: C7L1520DL35KWCLWVB

CCT¹: 3500K
Output lumens: 3281 lms
Input watts²: 50.5 W
Efficacy: 64.9 lm/w
CRI: 80 min
Spacing Crit.: 1.1
Beam Spread: 70°
Report no³: 129GFR

Zonal summary

Zone	Lumens	%Luminaire
0-30	2135	65.2%
0-40	3102	94.7%
0-60	3270	99.8%
0-90	3276	100.0%

Angle	Mean CP	Lumens
0	2086	
5	2067	206
10	2191	
15	2446	703
20	2730	
25	2747	1227
30	2343	
35	1596	967
40	750	
45	81	160
50	11	
55	8	7
60	6	
65	4	4
70	3	
75	2	2
80	1	
85	0	0
90	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	83	5.5'
6'	58	6.6'
7'	43	7.7'
8'	33	8.8'
9'	26	9.9'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	148.6	2.24
6'	97.5	1.47
7'	69.7	1.05
8'	58.1	0.87
9'	46.4	0.70

38'x38'x10' Room, Workplane 2 1/2' above floor, 80/50/20% Reflectances

Finish Adjust. factors

CL = 100%
CCL = 95%
CCD = 87%
CCZ = 63%
WH = 87%

CCT Adjust. factors

4000K = 103%
3500K = 100%
3000K = 97%
2700K = 87%

Coefficients of utilization

Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	93	93
1	113	110	108	106	108	104	104	101	101	98	98	94	99	94	90	86	86
2	107	102	98	95	101	94	97	92	92	88	88	84	92	87	84	84	84
3	102	95	90	86	94	85	91	84	84	80	80	76	88	82	78	78	78
4	96	88	82	78	87	78	85	77	77	73	73	69	84	77	73	73	73
5	91	82	76	71	81	71	79	70	70	66	66	62	78	70	66	66	66
6	86	76	70	66	76	65	74	65	65	61	61	57	74	66	61	61	61
7	81	71	65	60	71	60	69	60	60	56	56	52	69	60	56	56	56
8	77	67	60	56	66	56	65	56	56	52	52	48	65	56	52	52	52
9	73	62	56	52	62	52	61	52	52	48	48	44	61	52	48	48	48
10	69	58	52	48	58	48	57	48	48	44	44	40	58	48	44	44	44

1. Correlated Color Temperature within specs as defined in ANSI_NEMA_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.
2. Wattage controlled to within 5%.
3. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.


C7L-DL-VB

CALCULITE LED 7"

ROUND DOWNLIGHT

69W LED, 3500K, 20° Narrow 6000 lumen

Candela Curve

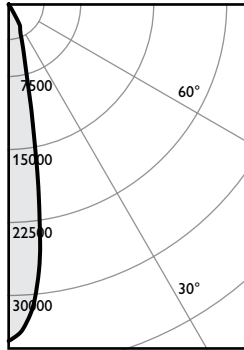

Frame: C7L50N1VBZ10V
Trim: C7L50DL35KNCLWVB

CCT¹: 3500K
Output lumens: 6174 lms
Input watts²: 69.4 W
Efficacy: 89.0 lm/w
CRI: 80 min
Spacing Crit.: 0.3
Beam Spread: 20°
Report no³: 327GFR

Zonal summary

Zone	Lumens	%Luminaire
0-30	5902	95.6%
0-40	6133	99.3%
0-60	6169	99.9%
0-90	6174	100.0%

Angle	Mean CP	Lumens
0	34747	
5	30669	2475
10	16592	
15	6860	2151
20	4015	
25	2810	1276
30	1411	
35	146	231
40	100	
45	39	33
50	5	
55	2	3
60	3	
65	2	2
70	3	
75	1	2
80	0	
85	1	1
90	1	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	1390	1.5'
6'	965	1.8'
7'	709	2.1'
8'	543	2.4'
9'	429	2.7'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	294	3.08
6'	193	2.02
7'	138	1.44
8'	115	1.20
9'	92	0.96

38'x38'x10' Room, Workplane 2 1/2' above floor, 80/50/20% Reflectances

Finish Adjust. factors

CL = 100%
CCL = 95%
CCD = 87%
CCZ = 63%
WH = 87%

CCT Adjust. factors


4000K = 103%
3500K = 100%
3000K = 97%
2700K = 87%

Coefficients of utilization

Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	100	0
1	115	113	111	109	111	108	107	104	103	101	101	97	103	101	97	94	
2	111	108	105	102	106	101	103	99	100	97	94	91	100	97	94	91	
3	108	103	100	97	102	96	100	95	97	93	91	88	97	93	89	84	
4	105	99	95	92	98	92	96	91	94	90	88	85	92	87	85	80	
5	102	96	92	89	95	88	93	88	92	87	85	83	89	84	83	78	
6	99	93	88	85	92	85	91	85	89	84	83	80	87	82	80	76	
7	96	90	86	83	89	82	88	82	87	82	80	78	85	80	78	74	
8	93	87	83	80	86	80	86	80	85	79	78	76	83	77	76	72	
9	91	84	80	78	84	78	83	77	83	77	76	74	81	75	74	70	
10	89	82	78	76	82	76	81	75	81	75	74	72	79	73	72	68	

69W LED, 3500K, 55° Medium 6000 lumen

Candela Curve

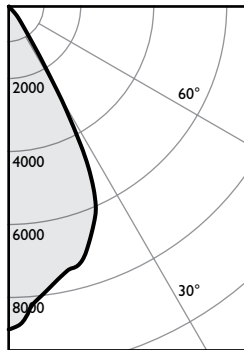

Frame: C7L50N1VBZ10V
Trim: C7L50DL35KMCLWVB

CCT¹: 3500K
Output lumens: 5963 lms
Input watts²: 69.2 W
Efficacy: 86.2 lm/w
CRI: 80 min
Spacing Crit.: 0.8
Beam Spread: 55°
Report no³: 329GFR

Zonal summary

Zone	Lumens	%Luminaire
0-30	5171	86.7%
0-40	5833	97.8%
0-60	5954	99.8%
0-90	5963	100.0%

Angle	Mean CP	Lumens
0	8911	
5	8195	770
10	7673	
15	7395	2052
20	6676	
25	5541	2348
30	2654	
35	839	662
40	421	
45	80	113
50	13	
55	10	8
60	7	
65	7	5
70	4	
75	3	4
80	1	
85	0	1
90	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	356	4.0'
6'	248	4.8'
7'	182	5.6'
8'	139	6.4'
9'	110	7.2'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	276	3.07
6'	181	2.01
7'	129	1.44
8'	108	1.20
9'	86	0.96

38'x38'x10' Room, Workplane 2 1/2' above floor, 80/50/20% Reflectances

Finish Adjust. factors

CL = 100%
CCL = 95%
CCD = 87%
CCZ = 63%
WH = 87%

CCT Adjust. factors

4000K = 103%
3500K = 100%
3000K = 97%
2700K = 87%

Coefficients of utilization

Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	100	0
1	114	111	109	107	109	105	105	102	102	99	95	91	103	101	97	94	
2	109	105	101	98	103	97	100	95	97	93	89	86	97	93	89	84	
3	104	98	94	90	97	90	95	88	92	87	84	81	92	87	84	80	
4	100	93	88	84	92	84	90	83	88	82	79	76	87	82	79	75	
5	95	88	83	79	87	78	85	78	84	77	75	72	83	77	74	70	
6	91	83	78	74	82	74	81	73	80	73	71	68	79	73	70	66	
7	87	79	73	70	78	69	77	69	76	69	67	64	75	69	66	62	
8	83	75	69	66	74	66	73	65	72	65	64	61	71	65	62	58	
9	80	71	66	62	71	62	70	62	69	62	60	57	68	62	59	55	
10	77	68	63	59	67	59	67	59	66	59	57	54	65	59	56	52	

1. Correlated Color Temperature within specs as defined in ANSI_NEMA_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.
2. Wattage controlled to within 5%.
3. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.


C7L-DL-VB

CALCULITE LED 7"

ROUND DOWNLIGHT

69W LED, 3500K, 70° Wide 6000 lumen

Candela Curve



Frame: C7L50N1VBZ10V
Trim: C7L50DL35KWCLWVB

CCT¹: 3500K
Output lumens: 5889 lms
Input watts²: 69.2 W
Efficacy: 85.1 lm/w
CRI: 80 min
Spacing Crit.: 1.1
Beam Spread: 70°
Report no³: 328GFR

Zonal summary

Zone	Lumens	%Luminaire
0-30	4013	68.1%
0-40	5608	95.2%
0-60	5881	99.9%
0-90	5889	100.0%

Angle	Mean CP	Lumens
0	4197	
5	4120	404
10	4350	
15	4705	1348
20	5106	
25	5077	2261
30	4159	
35	2538	1595
40	1197	
45	150	265
50	11	
55	10	8
60	7	
65	4	5
70	3	
75	2	2
80	1	
85	0	0
90	0	

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	168	5.5'
6'	117	6.6'
7'	86	7.7'
8'	66	8.8'
9'	52	9.9'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	268	3.07
6'	176	2.01
7'	125	1.44
8'	105	1.20
9'	84	0.96

38'x38'x10' Room, Workplane 2 1/2' above floor, 80/50/20% Reflectances

Finish Adjust. factors

CL = 100%
CCL = 95%
CCD = 87%
CCZ = 63%
WH = 87%

CCT Adjust. factors

4000K = 103%
3500K = 100%
3000K = 97%
2700K = 87%

Coefficients of utilization

Ceiling	80%				70%				50%				30%				0%
Wall	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%																
Room Cavity Ratio	0	119	119	119	119	116	116	111	111	106	106	100	106	106	100	100	100
1	113	111	108	106	108	104	104	101	101	101	98	93	101	98	93	93	93
2	108	103	99	95	101	94	98	92	95	90	86	86	95	90	86	86	86
3	102	95	90	86	94	86	91	84	89	83	80	80	89	83	80	80	80
4	97	89	83	79	88	78	85	77	83	76	74	74	83	76	74	74	74
5	91	83	77	72	82	72	80	71	78	71	69	69	78	71	69	69	69
6	86	77	71	67	76	66	75	66	74	66	64	64	74	66	64	64	64
7	82	72	66	62	72	61	70	61	69	61	59	59	69	61	59	59	59
8	78	68	61	57	67	57	66	57	65	57	55	55	65	57	55	55	55
9	74	63	57	53	63	53	62	53	61	53	51	51	61	53	51	51	51
10	70	60	54	50	59	50	58	49	58	49	48	48	58	49	48	48	48

1. Correlated Color Temperature within specs as defined in ANSI_NEMA_ANSI C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.
2. Wattage controlled to within 5%.
3. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products.



© 2014 Koninklijke Philips N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

C7L-DL-VB 01/15 page 9 of 9

Philips Lighting
North America Corporation
200 Franklin Square Drive
Somerset, NJ 08873
Phone: 855-486-2216

Philips Lighting Company
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008