

DP-3-W

DP-3-BNK

DP-3-BZ

PRODUCT DESCRIPTION

Available as a single puck, or in a 3-puck kit with power supply, GM Lighting's 3W Accent / Task Dimmable Puck is an easy to install solution for undercabinet lighting where shallow surface mount ability is desired, as well as a modern, clean look. The DPK Series packs in a lot of features that will insure years of maintenance free, warm and natural illumination.

12
VOLT80+
CRI5 Yr.
WARRANTY**PRODUCT ORDERING MATRIX**

Catalog No.	Length	Lumens	Beam Spread	Color Temp.*	Finish
DP-3-W	Individual Puck with 39" Lead with Male Plug.	3W	150°	3000K	White
DP-3-BZ		3W	150°	3000K	Bronze
DP-3-BNK		3W	150°	3000K	Brushed Nickel
DPK-9-W	3-Puck with 58" Switched Cord and Plug, Inline Dimmer and Power Supply	3W	3 X 150°	3000K	White
DPK-9-BZ		3W	3 X 150°	3000K	Bronze
DPK-9-BNK		3W	3 X 150°	3000K	Brushed Nickel

Individual pucks are supplied with 39" lead with male plug. * Kelvin temperature (color) ±200K

CONNECTORS AND ACCESSORIES

DPDS-B (W)	In-line dimmer switch - black / white
DPPS-24-12V	24W, Class 2, 48" cord/plug - 12VDC
DPSP-4-B (W)	4-puck power port - black / white
DPSP-8-B (W)	8-puck power port - black / white
GMC-MF-24-B (W)	24" male to female connector - black / white
GMC-MF-39-B (W)	39" male to female connector - black / white
GMC-MF-60-B (W)	60" male to female connector - black / white
GMC-MM-3-B (W)	3" male to male connector - black / white
GMC-MM-6-B (W)	6" male to male connector - black / white
GMC-MM-12-B (W)	12" male to male connector - black / white
GMC-MM-24-B (W)	24" male to male connector - black / white
GMC-MM-39-B (W)	39" male to male connector - black / white
GMC-FF-3-B (W)	3" female to female connector - black / white
GMC-PS-24-B (W)	24" power supply connector - black / white
GMC-PS-48-B (W)	48" power supply connector - black / white
GMC-PS-60-B (W)	60" power supply connector - black / white

12VDC 3W LED ACCENT / TASK DIMMABLE PUCK LIGHTING**KEY FEATURES**

- Surface mount 3W LED puck
- Mounts directly to surface
- Available in a 3-puck kit with 58" switched cord and plug, inline dimmer and power supply.
- Dimmable with inline dimmer switch (see below), or dimmable power supplies (see page 101)

ELECTRICAL

- 12VDC remote power supply required (included in kit)
- 50,000 hr. operation

OPTICS

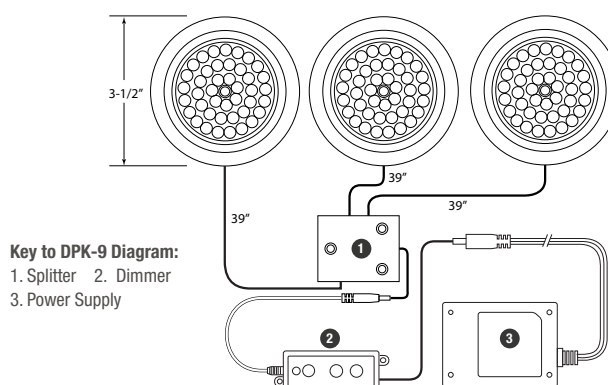
- 3000K
- 80+ CRI
- 3W LED
- 150° beam spread
- Captive frosted lens

CERTIFICATION

- UL

WARRANTY

- 5 year warranty

**PRODUCT DIAGRAM****Wiring Example:**