



Color: White

Weight: 0.5 lbs

Project:	Type:
Prepared By:	Date:


Driver Info		LED Info	
Type	Constant Current	Watts	16W
120V	0.18A	Color Temp	3000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	1,200 lm
Input Watts	16.5W	Efficacy	72.7

Technical Specifications			
Performance		Energy Star Approved:	
Description: The DISK34 is an ultra low profile surface-mount, ideal solution for new construction and retrofit applications. IC rated for direct contact with insulation, air tight, suitable for indoor applications in dry and damp environments. Mounting kit for recessed housing sold separately.		ENERGY STAR® Version 2.2 Certified	
Product Type: Surface & Flush Mounts		Energy Star ID: 2387952	
Input Wattage: 16.5W		Fixture Rating: Open	
Lumens: 1,200lm		IC Rated: Suitable for direct contact with insulation	
Efficacy: 72.7lm/W		Electrical	
L70 Lifespan: 50,000-Hour LED lifespan based on IES LM-70 results		Dimming Driver: TRIAC compatible dimmer with dimming as low as 5%	
Compliance		Power Factor: 0.9	
UL Listed: Suitable for damp locations		Flicker: <30%	
UL Classified: Yes		Input Voltage: 120V	
		Operating Frequency: 60Hz	
		Construction	
		Material: Aluminum	
		Trim Style: Smooth Trim	
		Shape: Round	
		Mounting: Surface mount	
		Operating Temperature: -30°C (-22°F) to 40°C (104°F)	
		Optical	
		Beam Angle: 110°	
		LED Characteristics	
		R9 Value: High color performance with R9 greater than 50	
		Other	
		Warranty: RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty .	

Technical Specifications (continued)

Buy American Act Compliance:
RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

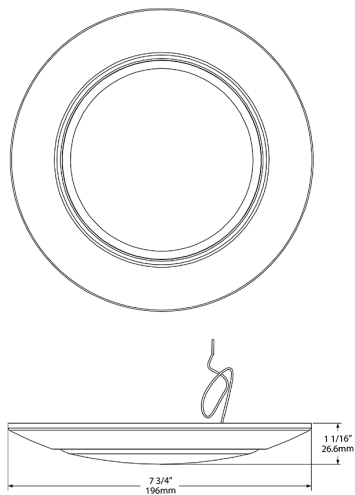

Features

- Super low profile backlit LED with driverless design
- Stamped aluminum housing
- New construction or retrofit applications
- Simple and quick installation from below the ceiling
- Installs on standard 4" and 6" junction boxes
- Can be retrofitted to existing downlight housings with option accessory
- Suitable for Damp locations
- Dimmable down to 5% on compatible dimmers
- 5-Year, limited warranty

Ordering Matrix

Family		Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim
DSK34	-	6	R	16.5	930	120	W	S
		6 = 6" 4 = 4"	R = Round	12 = 12W 14 = 14W 16 = 16W 16.5 = 16.5W	935 = 90 CRI, 3500K 927 = 90 CRI, 2700K 930 = 90 CRI, 3000K 940 = 90 CRI, 4000K 950 = 90 CRI, 5000K	120 = 120V	W = White B = Black BR = Bronze BN = Brushed Nickel	S = Smooth