

Description

The E4TATSB is a Non-IC Air-Tite™ housing optimized and listed for EISA compliant tungsten-halogen lamps, CFL and LED lamps, as well as incandescent. Housing features an adjustable socket bracket, and is suitable for residential or commercial applications. Installation in non-insulated ceilings with Air-Tite code compliant construction. If insulation is present it must be kept 3" from all sides of the housing. May be retrofit with compatible Halo LED lighting systems.

| Catalog # | | Type |
|-------------|--|------|
| Project | | |
| Comments | | Date |
| Prepared by | | |

Specification Features

Housing

- Die-formed CRS

Junction Box

- Seven conduit knockouts are uniform 1/2" size with true pry-out slots
- Four pry-outs with integral strain relief simplify "NM" non-metallic sheathed cable installation
- Three quick connect wire connectors included

Plaster Frame

- Housing is secured in plaster frame with spring barbs.
- The housing can be removed from the plaster frame to provide access to the junction box.
- Air-Tite gasket pre-installed on plaster frame.

Includes:

All Nail!™

- Integral precisely positioned nail for engineered and natural framing
- Mini-foot leveling flange
- Integral T-Grid Clip, no accessory clips required

Quick Connect™

- (3) Push wire nuts included, for speed & reliability
- Clear caps for wire connection visibility

Air-Tite™ code compliant

- ASTM E283 compliant

Socket

- Adjustable position bracket with porcelain socket and nickel plated brass screw shell provides flexibility in lamp positioning.

Thermal Protector

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Trims

- Halo Fit-All concept offers multiple trim options in a variety of design styles, and functional beam distributions to control beam angle and lumen delivery in accommodating various lamp types.

Compliance

- cULus Listed 1598 Luminaire
- cULus Damp Location Listed
- cULus Listed for Wet Location, covered ceiling, with select trims
- RoHS Compliant
- Air-Tite code compliant. Certified under ASTM E283; not exceeding 2.0 cfm (0.944 L/s) air leakage rate tested at a 1.57 psf (75 Pa) pressure differential




E4TATSB

**4" Non-Insulated Ceiling
AIR-TITE Recessed
Housing with Adjustable
Socket Bracket**

4" Trims



Dimensions

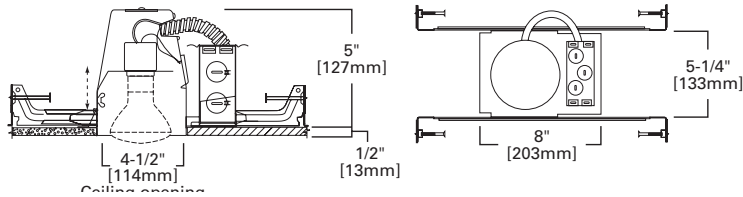

**FOR USE IN
NON-INSULATED CEILINGS
OR
INSULATED CEILINGS BUT
INSULATION MUST BE
KEPT 3" FROM ALL SIDES
OF FIXTURE**

Special Features

- All-Nail!™ bar hangers
- Quick Connect™ push wire nuts
- Air-Tite™ code compliant

Ordering Information

Sample Number: E4TATSB 4003SC

Order housing, trim and lamp (by others) separately for a complete luminaire.

Housing

E4TATSB = 4" AIR-TITE non-insulated ceiling small aperture housing with adjustable socket bracket

Trims

Reflectors



999 Reflector Cone

OD: 5-1/16" [129mm]

999P=Specular Clear, White Trim Ring
999RG=Residential Gold, White Trim Ring
999W=White Reflector, White Trim Ring
999H=Haze Reflector, White Trim Ring
999MB=Specular Black Reflector, White Trim Ring
999SN=Satin Nickel Reflector with Satin Nickel Trim Ring
999TBZ=Tuscan Bronze Reflector with Tuscan Bronze Trim Ring



4003 Reflector Cone

OD: 4-3/4" [120mm]

4003SC=Specular Clear Reflector, White Trim Ring

Baffles



953 Metal Baffle

OD: 5-1/16" [129mm]

953P=Black Baffle with White Trim Ring
953W=White Baffle with White Trim Ring
953SN=Satin Nickel Baffle with Satin Nickel Trim Ring
953TBZ=Tuscan Bronze Baffle with Tuscan Bronze Trim Ring



990 Pinhole Trim

OD: 5-1/16" [129mm]

990P=White Die Cast Trim
990AC=Antique Copper Die Cast Trim
990SN=Satin Nickel Die Cast Trim
990TBZ=Tuscan Bronze Die Cast Trim

Baffles



992 Wall Wash with Baffle

OD: 5-1/16" [129mm]

992P=White Scoop and Trim Ring, Black Baffle
992AC=Antique Copper, Scoop and Trim Ring, Black Baffle
992W=White Scoop and Trim Ring, White Baffle
993SN=Satin Nickel Scoop and Trim Ring, Black Baffle
993TBZ=Tuscan Bronze Scoop and Trim Ring, Black Baffle



993 Coiled Baffle

OD: 5-1/16" [129mm]

993P=Black Baffle with White Trim Ring
993W=White Baffle with White Trim Ring
993SN=Black Baffle with Satin Nickel Trim Ring
993TBZ=Black baffle with Tuscan Bronze Trim Ring



4001 Step Baffle

OD: 4-3/4" [120mm]

4001BB=Black Plastic Baffle, White Trim Ring
4001WB=White Plastic Baffle, White Trim Ring



4010 Metal Baffle

OD: 5" [127mm]

4010BB=Black Metal Baffle, White Trim Ring
4010WB=White Metal Baffle, White Trim Ring



4013 Metal Baffle

OD: 5" [127mm]

4013BB=Black Metal Baffle, White Trim Ring
4013WB=White Metal Baffle, White Trim Ring

Adjustable



996 Eyeball 15° Tilt

OD: 5-1/16" [129mm]

996P=White Eyeball
996SN=Satin Nickel Eyeball
996TBZ=Tuscan Bronze Eyeball



998 Eyeball 30° Tilt

OD: 5-1/16" [129mm]

998P=White Eyeball
998SN=Satin Nickel Eyeball
998TBZ=Tuscan Bronze Eyeball



4002 Eyeball

OD: 4-3/4" [120mm]

4002WH=White Eyeball

Lens / Wet Location Listed



951 Prismatic Glass Lens with Full Cone Reflector

951PS=Full Reflector and Glass Lens, White Trim
951SNS=Full Reflector and Glass Lens, Satin Nickel Trim
951TBZS=Full Reflector and Glass Lens, Tuscan Bronze Trim



952 Cone Reflector

952PS=White Trim Ring, Dome Lens Shower Light



945 Metropolitan Ice Light

OD: 5-5/16" [135mm]

945=Clear Frosted
945Blue=Blue Frosted



4055 Prismatic Glass Lens Shower Light

OD: 4-3/4" [120mm]

4055WH=Shower Light, White Trim Ring, Prismatic Flat Glass Lens



For use in Halo listed housings.