

SLIM EDGE INLINE
TOUCH DIMMER

SLIM EDGE TO SLIM EDGE
90° CONNECTOR



PRODUCT DESCRIPTION

Slim Edge™ is a 24VDC architectural LED linear thin lightbar that is the next evolution in undercabinet lighting. Using high-tech Edgelite technology - Slim Edge creates an even luminance while producing a gentle, soft light. 90+ CRI optics that present no diode imaging on polished surfaces. Available in 8", 16", 24" or 32" in white or bronze. Utilizing the wide array of connectors, Slim Edge can be configured to adapt to virtually any application.

See page 91 for power supplies.




PRODUCT ORDERING MATRIX

Catalog No.	Length	Wattage	Lumens	CRI	Color Temp*	Finish
EDGE-8-27-W	8" / 203mm	3W / bar	150 / bar	90+	2700K	White
EDGE-16-27-W	16" / 406mm	6W / bar	325 / bar	90+	2700K	White
EDGE-24-27-W	24" / 610 mm	10W / bar	550 / bar	90+	2700K	White
EDGE-32-27-W	32" / 1100mm	13W / bar	750 / bar	90+	2700K	White
EDGE-8-27-BZ	8" / 203mm	3W / bar	150 / bar	90+	2700K	Bronze
EDGE-16-27-BZ	16" / 406mm	6W / bar	325 / bar	90+	2700K	Bronze
EDGE-24-27-BZ	24" / 610 mm	10W / bar	550 / bar	90+	2700K	Bronze
EDGE-32-27-BZ	32" / 1100mm	13W / bar	750 / bar	90+	2700K	Bronze
EDGE-8-30-W	8" / 203mm	3W / bar	200 / bar	90+	3000K	White
EDGE-16-30-W	16" / 406mm	6W / bar	375 / bar	90+	3000K	White
EDGE-24-30-W	24" / 610 mm	10W / bar	600 / bar	90+	3000K	White
EDGE-32-30-W	32" / 1100mm	13W / bar	800 / bar	90+	3000K	White
EDGE-8-30-BZ	8" / 203mm	3W / bar	200 / bar	90+	3000K	Bronze
EDGE-16-30-BZ	16" / 406mm	6W / bar	375 / bar	90+	3000K	Bronze
EDGE-24-30-BZ	24" / 610 mm	10W / bar	600 / bar	90+	3000K	Bronze
EDGE-32-30-BZ	32" / 1100mm	13W / bar	800 / bar	90+	3000K	Bronze

Includes (2) mounting clips with screws, (1) lightbar to power supply connector (GMC-PS-24) and (1) rigid bar to bar connector (EDGE-BB-1) included with each lightbar. NOTE: White bar is supplied with white connectors. Bronze bar is supplied with black connectors.

* Kelvin temperature (color) $\pm 200K$

PRODUCT DIAGRAM

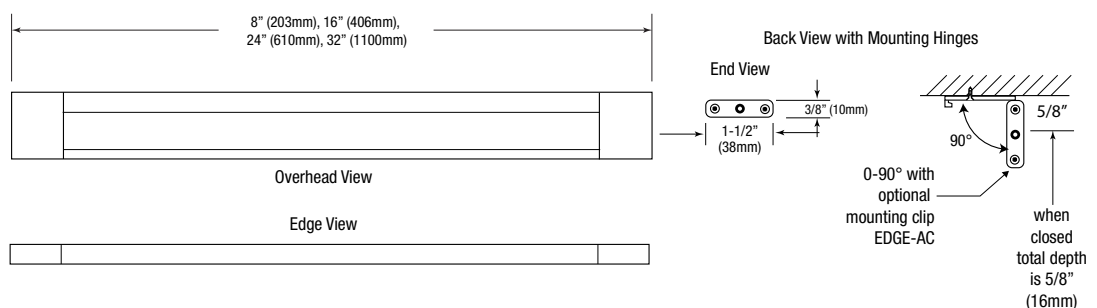

NEW! SLIM EDGE™ 24VDC MODULAR ARCHITECTURAL LIGHTBAR

KEY FEATURES

- Rigid modular edge lit lightbar.
- 0 - 90° with optional mounting clip.
- Mounting clips and screws included.
- Units join securely together with modular connectors.
- Dimmable (see page 101).
- Class 2. Maximum run on a given lead is 16'.

ELECTRICAL

- 24VDC remote power supply required (see page 91).
- Rated at 3.5W per foot.
- 50,000 hr. operation

OPTICS

- Edge-lit technology results in diode-free imaging on polished surfaces

- 90+ CRI
- 2700K, 3000K

CERTIFICATION

- ETL

WARRANTY

- 5 year warranty

