

EPANL Series

Fully-Luminous LED Flat Panel


Visually Appealing Yet Cost-Effective

The EPANL is a visually stunning, low profile, easy to install luminaire. The fully luminous lens provides a glare free solution creating a very comfortable environment. Add in standard 0-10V dimming and you can create the right amount of light for the space or task. With a depth of only two inches, restricted plenum space is no longer a concern. The EPANL luminaire is easy to install with great features making it ideal for many different applications.


The EPANL is available in two lumen packages and three sizes with multiple configurations for a versatile solution that is eligible for utility rebates.

Key Features:

- Lumen packages
 - 3400L - 2' x 2'
 - 4000L - 1' x 4' and 2' x 4'
- Long-life LEDs maintain 70% of their lumen output at 60,000 hours
- 0-10V driver with 10% dimming
- MVOLT 120-277V standard

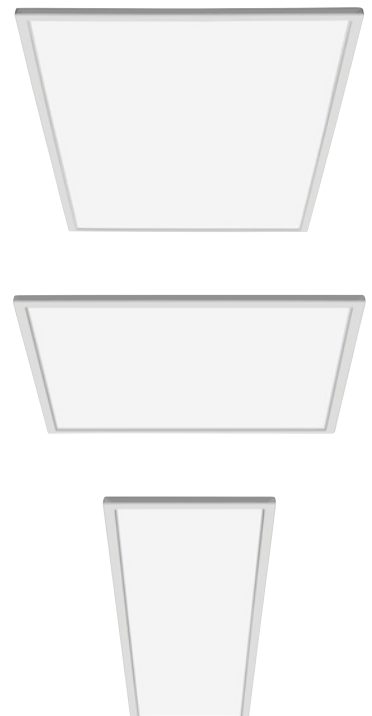

EPANL Series LED Luminaire

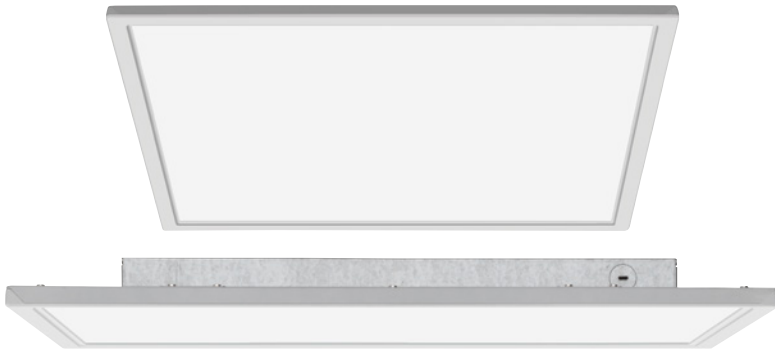

- Shallow depth 0.64" panel, 2" height including the driver box
- Superior frame design, no light leakage
- IP5x rated for bug and dust protection
- Fully luminous, glare free surface
- Suspended option available

Ordering Information

EXAMPLE: EPANL 24 40L 35K

EPANL Series Stock Solutions

Description*	Catalog #	UPC Code	CI Code	Wattage	Pallet Quantity
2'x2' EPANL, 3400 Lumens, 3500K	EPANL 22 34L 35K	190887602647	*247U4U	31	60
2'x2' EPANL, 3400 Lumens, 3500K, High Efficiency	EPANL 22 34LHE 35K	190887602661	*247U4W	26	60
2'x2' EPANL, 3400 Lumens, 4000K	EPANL 22 34L 40K	190887602678	*247U4X	31	60
2'x2' EPANL, 3400 Lumens, 4000K, High Efficiency	EPANL 22 34LHE 40K	190887602685	*247U4Y	26	60
2'x4' EPANL, 4000 Lumens, 3500K	EPANL 24 40L 35K	190887602692	*247U50	39	30
2'x4' EPANL, 4000 Lumens, 3500K, High Efficiency	EPANL 24 40LHE 35K	190887602708	*247U51	30	30
2'x4' EPANL, 4000 Lumens, 4000K	EPANL 24 40L 40K	190887602715	*247U52	39	30
2'x4' EPANL, 4000 Lumens, 4000K, High Efficiency	EPANL 24 40LHE 40K	190887602722	*247U53	31	30
1'x4' EPANL, 4000 Lumens, 3500K	EPANL 14 40L 35K	190887602739	*247U54	39	45
1'x4' EPANL, 4000 Lumens, 3500K, High Efficiency	EPANL 14 40LHE 35K	190887602746	*247U55	31	45
1'x4' EPANL, 4000 Lumens, 4000K	EPANL 14 40L 40K	190887602753	*247U56	39	45
1'x4' EPANL, 4000 Lumens, 4000K, High Efficiency	EPANL 14 40LHE 40K	190887602760	*247U57	30	45

*nominal lumen values



Visit www.lithonia.com for more information.