

DESCRIPTION

The All-Pro 500 series utilizes a 5" aperture designed to accommodate smaller sized PAR20 and PAR30 halogen lamps.

APPLICATION

The 5" diameter trim size makes this series the right choice for applications where dramatic yet inconspicuous lighting is required and higher wattages are desired. If fixture is used in insulated ceilings, insulation must be kept 3 inches away from all sides of fixture.

DESIGN FEATURES

A...Housing

Die-stamped 22 gauge CRS with white powder coat finish.

B...Plaster Frame

Housing adjusts in plaster frame to accommodate ceiling up to 1 3/8" thick.

C...Junction Box

U.L. listed for through branch circuit wiring. Positioned to accommodate straight conduit runs. Seven conduit knockouts are uniform 1/2" size with true pryout slots. Four Romex pryouts with integral strain relief also included.

D...Bar Hangers

Pre-installed, captive bar hangers allow housing to be positioned at any point within a 24" joist span. A set screw is provided to lock housing in position along bar hangers. Score lines provided for easy field shortening for 12" joists. Unique arrowhead design provides "nailess" installation. Bar hangers can be repositioned 90° without tools on plaster frame.

E...Socket

Porcelain socket with nickel plated brass screw shell, snaps

Catalog #	Type
Project	
Comments	
Prepared by	Date


into trim for consistent lamp positioning. Shipping insert protects socket from overspray.

F...Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or incorrect application of insulation material.

Labels



- U.L. listed for damp location
- U.L. listed for Feed Through
- C.S.A. certified
- IP Rated

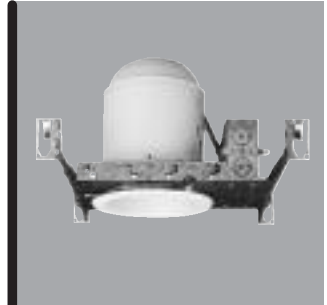

ET500

5" Non-Insulated Ceiling Recessed Housing

5" TRIMS

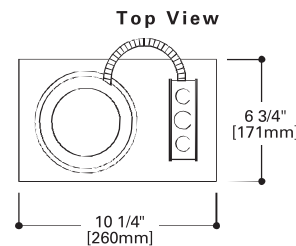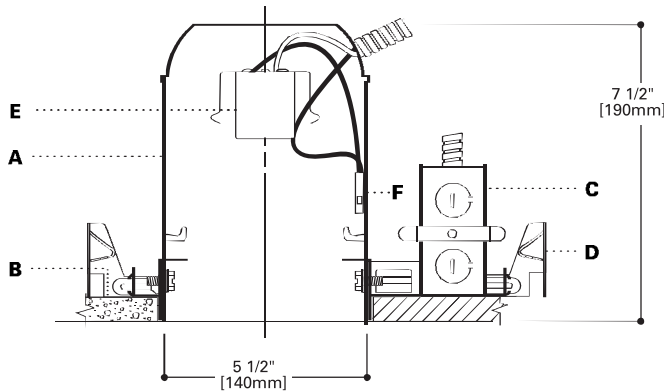

FOR USE IN NON-INSULATED CEILING OR INSULATED CEILING BUT INSULATION MUST BE KEPT 3" FROM ALL SIDES OF FIXTURE

Ordering Information on reverse.


TRIMS

ORDERING INFORMATION

SAMPLE NUMBER: ET500ERT513

Order housing and trim separately.

Housing




ET500=5" Non-Insulated Ceiling Housing

Trims




BAFFLES



ERT513

Black Metal Baffle
 60W A19, 75W R30, 75W PAR30L, 65W BR30
 ERT513=Black Baffle
 OD: 6 1/2" (165mm)



ERT513WHT

White Metal Baffle
 60W A19, 75W R30, 75W PAR30L, 65W BR30
 ERT513WHT=White Baffle
 High Gloss Appliance White Finish
 OD: 6 1/2" (165mm)



ERT570

Eyeball (30° Tilt)
 75W PAR30
 ERT570=High Gloss Appliance White Finish
 OD: 6 1/2" (165mm)



ERT520

Reflector Cone
 65W R30, 75W R30, 75W PAR30, 75W PAR30L
 ERT520=Specular Clear Reflector, High Gloss Appliance White Finish
 Trim Ring
 OD: 6 1/2" (165mm)



ERT552

Fresnel Lens Shower Light
 60W A19, 50W PAR30, 50W PAR30L, 65W BR30
 ERT552=Fresnel Lens, High Gloss Appliance White Finish Trim Ring
 OD: 6 1/2" (165mm)

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com