

WAC LIGHTING

Geos 15" & 22"

Ceiling Mount

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
FM-4615 15"	2700K 90	BR Brushed Brass	29.5W	2330	1485
	3000K 90	TT Titanium	28.5W	2355	1660
		WT White			

Example: **FM-4615-30-WT**

For custom requests please contact customs@waclighting.com

DESCRIPTION

Cutting-edge technology in the display industry transformed into a super-thin, less than an inch profile flush mount. Multiple mid-powered LED source illuminate the diffuser uniformly and without socket shadows common in conventional flush mounts.

FEATURES


- Super thin, edge-lit LED panel at less than an inch thick
- Twist-lock quick install mechanism
- Driver installed within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K, 2700K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with frosted acrylic diffuser



FINISHES:



LINE DRAWING:

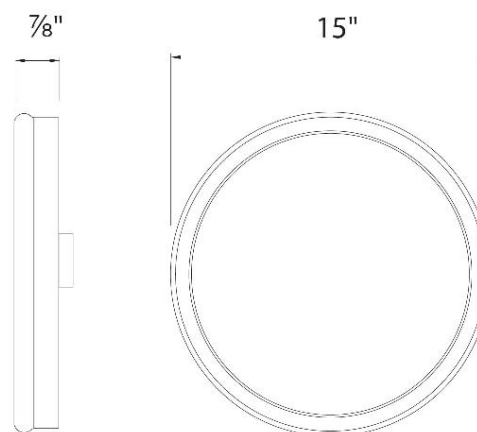

WAC LIGHTING

Geos 15" & 22"

Ceiling Mount

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
FM-4622 22"	2700K 90 3000K 90	BR Brushed Brass TT Titanium WT White	44.5W 42.5W	3745 3785	2235 2375

Example: **FM-4622-30-WT**

For custom requests please contact customs@waclighting.com

DESCRIPTION

Cutting-edge technology in the display industry transformed into a super-thin, less than an inch profile flush mount. Multiple mid-powered LED source illuminate the diffuser uniformly and without socket shadows common in conventional flush mounts.

FEATURES


- Super thin, edge-lit LED panel at less than an inch thick
- Twist-lock quick install mechanism
- Driver installed within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K, 2700K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with frosted acrylic diffuser



FINISHES:



LINE DRAWING:

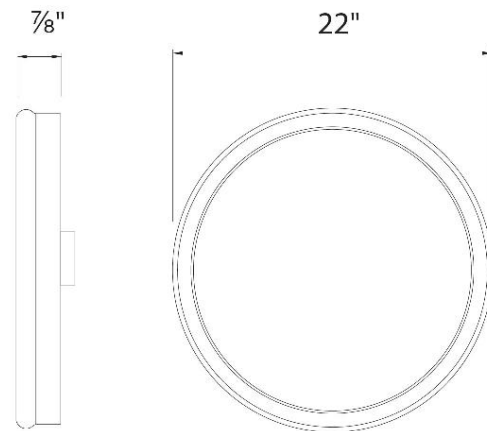

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____