

WAC LIGHTING

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Dot

Ceiling Mount

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
FM-W57806 6"	3000K 90 3500K 90	BK Black SS Stainless Steel	10.4W	791 859	535 581

Example: **FM-W57806-35-SS**

For custom requests please contact customs@waclighting.com

DESCRIPTION

Optimal diffuser amplifies the brightness on this durable waterproof outdoor flush mount.

FEATURES

- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	3500K,3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8-2019 Compliant,Energy Star 2.0 Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade



FINISHES:



LINE DRAWING:

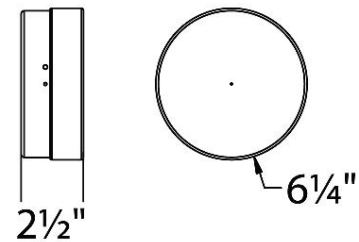

FM-W57806

WAC LIGHTING

Dot

Ceiling Mount

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
FM-W57809 9"	3000K 90 3500K 90	BK Black SS Stainless Steel	16.5W	1542 1674	939 1019

Example: **FM-W57809-35-SS**

•For 277V special order, add an "F" before the finish: FM-W57809F-35-SS

For custom requests please contact customs@waclighting.com

DESCRIPTION

Optimal diffuser amplifies the brightness on this durable waterproof outdoor flush mount.

FEATURES


- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	3500K,3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8-2019 Compliant,Energy Star 2.0 Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade



FINISHES:



LINE DRAWING:

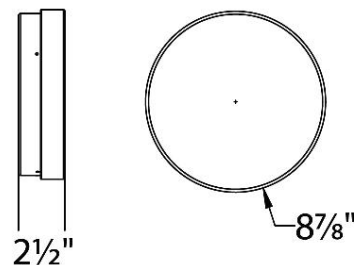

FM-W57809

WAC LIGHTING

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Dot

Ceiling Mount

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
FM-W57812 12"	3000K 90 3500K 90	BK Black SS Stainless Steel	26.2W	2315 2513	1376 1499

Example: **FM-W57812-35-SS**

•For 277V special order, add an "F" before the finish: FM-W57812F-35-BK

For custom requests please contact customs@wacighting.com

DESCRIPTION

Optimal diffuser amplifies the brightness on this durable waterproof outdoor flush mount.

FEATURES

- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	3500K,3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8-2019 Compliant,Energy Star 2.0 Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade



FINISHES:



LINE DRAWING:

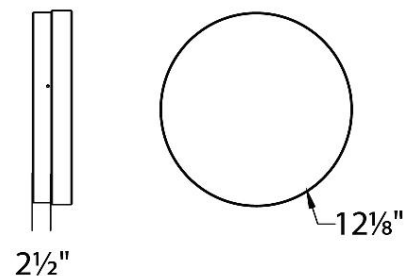

FM-W57812

WAC LIGHTING

Dot

Ceiling Mount

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
FM-W57815 15"	3000K 90 3500K 90	BK Black SS Stainless Steel	31W	2460 2513	1672 1568

Example: **FM-W57815-35-SS**

•For 277V special order, add an "F" before the finish: FM-W57815F-30-BK

For custom requests please contact customs@wacighting.com

DESCRIPTION

Optimal diffuser amplifies the brightness on this durable waterproof outdoor flush mount.

FEATURES


- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K,3500K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8-2019 Compliant,Energy Star 2.0 Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade



FINISHES:



LINE DRAWING:

