

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential applications. **If required for commercial application or operation more than eight (8) hours per day, consult factory for available options.** Ideal for use in foyers, hallways, bedrooms, offices, utility work areas, stairways, and many other rooms in the house.

### CONSTRUCTION

The beauty of simplicity in a low profile styled square, stay-white, acrylic diffuser, available in three sizes: 12", 15", or 20". These fixtures provide an attractive low-cost lighting solution for every room in the home. Hidden cam latches provide for easy diffuser removal for installation and maintenance.

### ELECTRICAL

Fixtures available with lamps and without lamps. Fixtures without lamps are available in either compact double twin-tube (DTT) or circline T9 fluorescent lamp configurations. Fixtures with lamps include circline T9 4100 K fluorescent lamp(s) for energy efficiency and superior color rendering.

Standard with electronic ballast (120 volt, 60Hz) ensures no flickering and quiet operation without interfering with other home electronics. For use with non-dimmable switches only.

### INSTALLATION

All mounting hardware included.

### LISTINGS

UL Listed to US and Canadian safety standards and suitable for damp locations.

### WARRANTY

2-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**NOTE:** Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Catalog Number
Notes
Type




Decorative Indoor


# Low Profile Square Flush Mount



Circline T9 or Compact DTT Fluorescent



DIMENSIONS						
Nominal size	Lamp configuration	Model number	Number of lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
12 sq"		FM22 ACLS LP	(1) 22W circline T9	12 (30.5)	12 (30.5)	3-1/4 (8.3)
		FMLS 22				
		FMLS12 2 13DTT	(1) 13W compact DTT			
15 sq"		FMLS12 2 13DTT	(1) 22W & (1) 32W circline T9	14-3/4 (37.5)	14-3/4 (37.5)	3-3/8 (8.6)
		FMLS 54				
		FMLS15 2 18DTT	(2) 18W compact DTT			
20 sq"		FMLS 72	(1) 32W & (1) 40W circline T9	19-3/4 (50.0)	19-3/4 (50.0)	3-5/8 (9.2)
		FMLS20 3 26DTT	(3) 26W compact DTT			
*Extension from ceiling. All dimensions are inches (centimeters) unless otherwise indicated.						

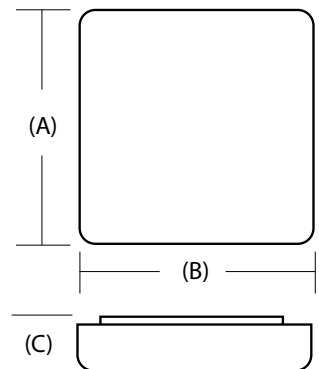

### ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** FM22 ACLS LP

Series <sup>1</sup>					
<b>12" square</b>		<b>15" square</b>		<b>20" square</b>	
FM22 ACLS LP	(1) 22W circline T9 lamp included <sup>2</sup>	FMLS 54	(1) 22W & (1) 32W circline T9 lamp required <sup>3</sup>	FMLS 72	(1) 32W & (1) 40W circline T9 lamp required <sup>3</sup>
FMLS 22	(1) 22W circline T9 lamp required <sup>3</sup>	FMLS 15 2 18 DTT	(2) 18W compact (DTT) lamp(s) required <sup>3</sup>	FMLS 20 3 26 DTT	(3) 26W compact (DTT) lamp(s) required <sup>3</sup>
FMLS 12 2 13 DTT	(2) 13W (DTT) lamp(s) required <sup>3</sup>				

Replacement parts: Order as separate catalog number.			
FM22 ACLS LP	DFMS12 M6 diffuser	FMLS 15 2 18DTT	DFMS15 M6 diffuser
FMLS22	DFMS12 M6 diffuser	FM72 ACLS LP	DFMS20 M6 diffuser
FMLS 12 2 13DTT	DFMS12 M6 diffuser	FMLS 72	DFMS20 M6 diffuser
FM54 ACLS LP	DFMS15 M6 diffuser	FMLS 20 3 26DTT	DFMS20 M6 diffuser
FMLS 54	DFMS15 M6 diffuser		

### Notes

- 1 Use with non-dimmable switches only.
- 2 Includes circline T9 4100 K fluorescent lamp(s).
- 3 Lamp(s) not included.

# Low Profile Square Flush Mount

---

## PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.