



Color:  Gray

UPC Code: 078477723562

Country Of Origin: China

NEMA:
5-15R



GFNL1-HGG

SmartlockPro GFCI Duplex Receptacle Outlet, Heavy-Duty Hospital Grade, Tamper-Resistant, Power Indication, 15 Amp, 20 Amp Feed-Through, 125 Volt, Back or Side Wire, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - Gray

Peace of mind, all the time. The SmartlockPro Self-Test GFCI tests itself even if you forget. Designed to meet the latest UL standard for auto-monitoring (self-test) our complete line of self-test GFCIs periodically conduct an automatic internal test to confirm that it can respond to a ground fault. With the slimmest profile on the market, the device allows for fast and easy installation, while Leviton's patented reset lockout mechanism prevents reset of the GFCI if it is not wired or operating correctly. The SmartlockPro Self-Test GFCI is the smart choice in ground fault circuit interrupter protection.

Technical Information

AC Horsepower Ratings

At Rated Voltage: 1 HP

Electrical Specifications

Amperage: 15 A & 20 A Feed-Through

Grounding: Self-Grounding

Pole: 2

Short Circuit Current Rating: 10kA

Voltage: 125 VAC

Wire: 3

Environmental Specifications

Flammability: Rated V-0 per UL 94

Operating Temperature: -35C to +66C

Material Specifications

Body Material: Polycarbonate

Face Material: PBT

Ground Clips: Brass

Grounding Screw: Plated Steel

Line Contacts: Brass

Shutter Mechanism: Delrin® Acetal

Strap Material: Galvanized Steel

Terminal Clamp: Brass

Terminal Screws: Plated Steel

Mechanical Specifications

Product ID: Ratings are permanently marked on device

Terminal Accom.: 14-10 AWG solid or stranded

Terminal ID: Brass-Hot, Green-Ground, Silver-Neutral

Termination: Back or Side Wire

Product Features

Amperage: 15 A & 20 A Feed-Through

Brand: SmartlockPro

Color: Gray

Device Type: Duplex Receptacle Outlet

Feature: Tamper-Resistant, Power Indication

Function: GFCI

Grade: Heavy-Duty Hospital Grade

NEMA: 5-15R

Tamper Resistant: Yes

Standards and Certifications

ANSI: C-73

Applicable Standards: UL 943, UL 498, CSA C22.2 No. 42 & 144, FedSpec W-C-596

Certification/Listing: UL, CSA, NOM-ANCE

NEMA: WD-1 & WD-6


Warranty

Product Warranty: 2-Year Limited

Patents*

CA2341552	US7400479
CA2358721	US7697252
CA2425810	US7737809
CA2427366	US7764151
CA2515035	US7820909
CA2621644	US7862350
CA2677283	US7868719
MX234458	US8004804
MX251584	US8242362
MX269232	US8444309
MX276411	US8547126
MX276626	US8587914
MX302458	US8599522
MX308495	US9053886
MX315596	USD674753
US7355117	

*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

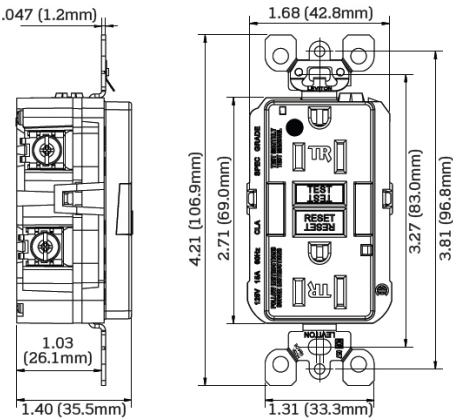

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
	JOB NUMBER: <input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

