

## Tesla Pro

### New Construction IC Airtight Housing

#### Model & Product

HR-2LED-H09D-ICA Tesla 2in LED IC-  
Rated New Construction Housing  
HR-2LED-H09D-ICAC Tesla 2in LED IC-  
Rated Chicago Plenum Rated New  
Construction Housing

Example: **HR-2LED-H09D-ICA**

#### DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

#### FEATURES

- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS

|                    |                                                               |
|--------------------|---------------------------------------------------------------|
| Construction:      | 20 gauge cold rolled steel                                    |
| Power:             | 14.5W                                                         |
| Input:             | 120-277 VAC, 50/60Hz                                          |
| Dimming:           | ELV: 100-5% , 0-10V: 100-0%                                   |
| Mounting:          | Heavy gauge retention clips secures housing firmly to ceiling |
| Cut Out:           | 3 7/8"                                                        |
| Finish:            | Aluminum                                                      |
| Ceiling Thickness: | 1/2" - 3/4"                                                   |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                 |
| Standards:         | ETL, cETL, IC, Airtight                                       |

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_




#### FINISHES:



Aluminum

#### LINE DRAWING:

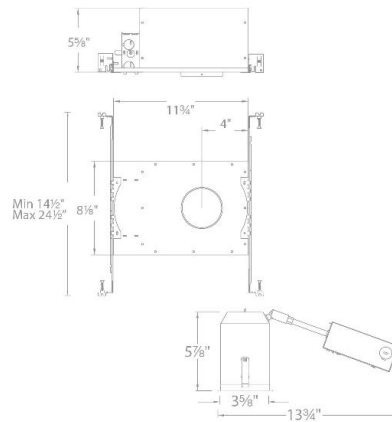

## Tesla Pro 2"

### Trim High Brightness Round

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

| Model        | Beam                    | Color Temp & CRI | Lumens | CBCP  | Finish            |
|--------------|-------------------------|------------------|--------|-------|-------------------|
| HR2LD-ET109P | F 55°<br>N 30°<br>S 15° | 827 2700K - 85   | 935    | 972   | BN Brushed Nickel |
|              |                         | 830 3000K - 85   | 975    | 994.6 | CB Copper Bronze  |
|              |                         | 835 3500K - 85   | 1055   | 1090  | WT White          |
|              |                         | 840 4000K - 85   | 1075   | 1106  |                   |
|              |                         | 927 2700K - 90   | 760    | 777   |                   |
|              |                         | 930 3000K - 90   | 860    | 877.7 |                   |
|              |                         |                  | 955    | 1765  |                   |
|              |                         |                  | 990    | 1807  |                   |
|              |                         |                  | 1080   | 2015  |                   |
|              |                         |                  | 1090   | 2035  |                   |
|              |                         |                  | 775    | 1436  |                   |
|              |                         |                  | 880    | 1619  |                   |
|              |                         |                  | 725    | 3252  |                   |
|              |                         |                  | 780    | 3485  |                   |
|              |                         |                  | 785    | 3526  |                   |
|              |                         |                  | 810    | 3619  |                   |
|              |                         |                  | 610    | 2732  |                   |
|              |                         |                  | 550    |       |                   |

Example: **HR2LD-ET109PF827BN**

#### DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

#### FEATURES


- 2" aperture
- 5 year warranty

#### SPECIFICATIONS


|                    |                                                                                     |
|--------------------|-------------------------------------------------------------------------------------|
| Construction:      | Die-cast aluminum construction                                                      |
| Power:             | 14.5W                                                                               |
| Input:             | 120-277 VAC, 50/60Hz                                                                |
| Dimming:           | ELV: 100-5% , 0-10V: 100-0%                                                         |
| Light Source:      | Integrated LED                                                                      |
|                    | 3 Step Mac Adam Ellipse                                                             |
| Rated Life:        | 50000 Hours                                                                         |
| Mounting:          | Heavy gauge retention clips support trim firmly                                     |
| Finish:            | Electroplated:Copper Bronze, Electroplated::White,<br>Electroplated::Brushed Nickel |
| Ceiling Thickness: | 1/2" - 3/4"                                                                         |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                                       |
| Standards:         | ETL, cETL, Wet Location Listed, Title 24 JA8-2019<br>Compliant                      |



#### FINISHES:



#### LINE DRAWING:



## Tesla Pro 2"

### Open Reflector Round

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

| Model      | Beam                    | Color Temp & CRI | Lumens | CBCP | Finish                                            |
|------------|-------------------------|------------------|--------|------|---------------------------------------------------|
| HR2LED109P | F 40°<br>N 27°<br>S 15° | 827 2700K - 85   | 720    | 1278 | BN Brushed Nickel<br>CB Copper Bronze<br>WT White |
|            |                         | 830 3000K - 85   | 760    | 1330 |                                                   |
|            |                         | 835 3500K - 85   | 830    | 1476 |                                                   |
|            |                         | 840 4000K - 85   | 860    | 1519 |                                                   |
|            |                         | 927 2700K - 90   | 595    | 1037 |                                                   |
|            |                         | 930 3000K - 90   | 675    | 1158 |                                                   |
|            |                         |                  | 750    | 2077 |                                                   |
|            |                         |                  | 810    | 2250 |                                                   |
|            |                         |                  | 865    | 2378 |                                                   |
|            |                         |                  | 890    | 2457 |                                                   |
|            |                         |                  | 630    | 1656 |                                                   |
|            |                         |                  | 700    | 1871 |                                                   |
|            |                         |                  | 590    | 3260 |                                                   |
|            |                         |                  | 635    | 3493 |                                                   |
|            |                         |                  | 640    | 3534 |                                                   |
|            |                         |                  | 655    | 3627 |                                                   |
|            |                         |                  | 495    | 2738 |                                                   |
|            |                         |                  | 450    | 2479 |                                                   |

Example: **HR2LED109PF827BN**

#### DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

#### FEATURES


- 2" aperture
- 30° visual cutoff angle for glare control
- 5 year warranty

#### SPECIFICATIONS


|                    |                                                                                      |
|--------------------|--------------------------------------------------------------------------------------|
| Construction:      | Die-cast aluminum construction                                                       |
| Power:             | 14.5W                                                                                |
| Input:             | 120-277 VAC, 50/60Hz                                                                 |
| Dimming:           | ELV: 100-5% , 0-10V: 100-0%                                                          |
| Light Source:      | Integrated LED<br>3 Step Mac Adam Ellipse                                            |
| Rated Life:        | 50000 Hours                                                                          |
| Mounting:          | Heavy gauge retention clips support trim firmly                                      |
| Finish:            | Electroplated:Copper Bronze, Electroplated::White,<br>Electroplated:::Brushed Nickel |
| Ceiling Thickness: | 1/2" - 3/4"                                                                          |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                                        |
| Standards:         | ETL, cETL, Damp Location Listed, Title 24 JA8-2019<br>Compliant                      |



#### FINISHES:



#### LINE DRAWING:



## Tesla Pro 2"

### Shower Trim Round

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

| Model       | Beam  | Color Temp & CRI | Lumens | CBCP | Finish            |
|-------------|-------|------------------|--------|------|-------------------|
| HR2LEDT209P | N 27° | 827 2700K - 85   | 730    | 1851 | BN Brushed Nickel |
|             |       | 830 3000K - 85   | 765    | 1915 | CB Copper Bronze  |
|             |       | 835 3500K - 85   | 820    | 2047 | WT White          |
|             |       | 840 4000K - 85   | 850    | 2119 |                   |
|             |       | 927 2700K - 90   | 600    | 1510 |                   |
|             |       | 930 3000K - 90   | 685    | 1697 |                   |

Example: **HR2LEDT209PN827BN**

#### DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

#### FEATURES


- 2" aperture
- 30° visual cutoff angle for glare control
- 5 year warranty

#### SPECIFICATIONS


|                           |                                                                                                                                        |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction:</b>      | Die-cast aluminum construction                                                                                                         |
| <b>Power:</b>             | 14.5W                                                                                                                                  |
| <b>Input:</b>             | 120-277 VAC, 50/60Hz                                                                                                                   |
| <b>Dimming:</b>           | ELV: 100-5% , 0-10V: 100-0%                                                                                                            |
| <b>Light Source:</b>      | Integrated LED<br>3 Step Mac Adam Ellipse                                                                                              |
| <b>Rated Life:</b>        | 50000 Hours                                                                                                                            |
| <b>Mounting:</b>          | Heavy gauge retention clips support trim firmly                                                                                        |
| <b>Finish:</b>            | Electrostatically Powder Coated:White, Electrostatically Powder Coated::Copper Bronze, Electrostatically Powder Coated::Brushed Nickel |
| <b>Ceiling Thickness:</b> | 1/2" - 3/4"                                                                                                                            |
| <b>Operating Temp:</b>    | -4°F to 104°F (-20°C to 40°C)                                                                                                          |
| <b>Standards:</b>         | ETL, cETL, Wet Location Listed, Title 24 JA8-2019 Compliant                                                                            |



#### FINISHES:



#### LINE DRAWING:



# WAC LIGHTING

## Tesla Pro 2"

0° - 30° Adjustable Trim Round

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

| Model       | Beam                    | Color Temp & CRI | Lumens | CBCP | Finish            |
|-------------|-------------------------|------------------|--------|------|-------------------|
| HR2LEDT309P | F 40°<br>N 27°<br>S 15° | 827 2700K - 85   | 750    | 1315 | BN Brushed Nickel |
|             |                         | 830 3000K - 85   | 785    | 1371 | CB Copper Bronze  |
|             |                         | 835 3500K - 85   | 840    | 1458 | WT White          |
|             |                         | 840 4000K - 85   | 865    | 1507 |                   |
|             |                         | 927 2700K - 90   | 610    | 1038 |                   |
|             |                         | 930 3000K - 90   | 695    | 1181 |                   |
|             |                         |                  | 780    | 2020 |                   |
|             |                         |                  | 810    | 2044 |                   |
|             |                         |                  | 875    | 2227 |                   |
|             |                         |                  | 895    | 2332 |                   |
|             |                         |                  | 635    | 1619 |                   |
|             |                         |                  | 730    | 1924 |                   |
|             |                         |                  | 545    | 2083 |                   |
|             |                         |                  | 585    | 2232 |                   |
|             |                         |                  | 590    | 2258 |                   |
|             |                         |                  | 460    | 2317 |                   |
|             |                         |                  | 415    | 1750 |                   |
|             |                         |                  |        | 1584 |                   |

Example: **HR2LEDT309PF827BN**

### DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

### FEATURES


- 2" aperture
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 5 year warranty

### SPECIFICATIONS

|                    |                                                                                     |
|--------------------|-------------------------------------------------------------------------------------|
| Construction:      | Die-cast aluminum construction                                                      |
| Power:             | 14.5W                                                                               |
| Input:             | 120-277 VAC, 50/60Hz                                                                |
| Dimming:           | ELV: 100-5% , 0-10V: 100-0%                                                         |
| Light Source:      | Integrated LED<br>3 Step Mac Adam Ellipse                                           |
| Rated Life:        | 50000 Hours                                                                         |
| Mounting:          | Heavy gauge retention clips support trim firmly                                     |
| Finish:            | Electroplated:Copper Bronze, Electroplated::White,<br>Electroplated::Brushed Nickel |
| Ceiling Thickness: | 1/2" - 3/4"                                                                         |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                                       |
| Standards:         | ETL, cETL, Damp Location Listed, Title 24 JA8-2019<br>Compliant                     |



### FINISHES:



### LINE DRAWING:



## Tesla Pro 2"

30°- 45° Adjustable Trim Round

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

| Model       | Beam                    | Color Temp & CRI | Lumens | CBCP  | Finish                                            |
|-------------|-------------------------|------------------|--------|-------|---------------------------------------------------|
| HR2LEDT409P | F 40°<br>N 27°<br>S 17° | 827 2700K - 85   | 620    | 1243  | BN Brushed Nickel<br>CB Copper Bronze<br>WT White |
|             |                         | 830 3000K - 85   | 630    | 1298  |                                                   |
|             |                         | 835 3500K - 85   | 680    | 1376  |                                                   |
|             |                         | 840 4000K - 85   | 695    | 1395  |                                                   |
|             |                         | 927 2700K - 90   | 490    | 981.9 |                                                   |
|             |                         | 930 3000K - 90   | 565    | 1104  |                                                   |
|             |                         |                  | 635    | 2053  |                                                   |
|             |                         |                  | 665    | 2151  |                                                   |
|             |                         |                  | 715    | 2272  |                                                   |
|             |                         |                  | 730    | 2294  |                                                   |
|             |                         |                  | 515    | 1598  |                                                   |
|             |                         |                  | 595    | 1849  |                                                   |
|             |                         |                  | 465    | 1635  |                                                   |
|             |                         |                  | 500    | 1752  |                                                   |
|             |                         |                  | 505    | 1772  |                                                   |
|             |                         |                  | 521    | 1819  |                                                   |
|             |                         |                  | 390    | 1374  |                                                   |
|             |                         |                  | 355    |       |                                                   |

Example: **HR2LEDT409PF827BN**

### DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

### FEATURES


- 2" aperture
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 5 year warranty

### SPECIFICATIONS

|                    |                                                                                  |
|--------------------|----------------------------------------------------------------------------------|
| Construction:      | Die-cast aluminum construction                                                   |
| Power:             | 14.5W                                                                            |
| Input:             | 120-277 VAC, 50/60Hz                                                             |
| Dimming:           | ELV: 100-5% , 0-10V: 100-0%                                                      |
| Light Source:      | Integrated LED<br>3 Step Mac Adam Ellipse                                        |
| Rated Life:        | 50000 Hours                                                                      |
| Mounting:          | Heavy gauge retention clips support trim firmly                                  |
| Finish:            | Electroplated:Brushed Nickel, Electroplated::Copper Bronze, Electroplated::White |
| Ceiling Thickness: | 1/2" - 3/4"                                                                      |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                                    |
| Standards:         | ETL, cETL, Damp Location Listed                                                  |



### FINISHES:



### LINE DRAWING:



## Tesla Pro 2"

0° - 30° Adjustable Trim Square

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

| Model       | Beam                    | Color Temp & CRI | Lumens | CBCP  | Finish                                            |
|-------------|-------------------------|------------------|--------|-------|---------------------------------------------------|
| HR2LEDT509P | F 45°<br>N 30°<br>S 15° | 827 2700K - 85   | 765    | 1066  | BN Brushed Nickel<br>CB Copper Bronze<br>WT White |
|             |                         | 830 3000K - 85   | 800    | 1099  |                                                   |
|             |                         | 835 3500K - 85   | 860    | 1205  |                                                   |
|             |                         | 840 4000K - 85   | 870    | 1226  |                                                   |
|             |                         | 927 2700K - 90   | 620    | 875.2 |                                                   |
|             |                         | 930 3000K - 90   | 705    | 987.5 |                                                   |
|             |                         |                  | 795    | 1870  |                                                   |
|             |                         |                  | 820    | 1895  |                                                   |
|             |                         |                  | 895    | 2075  |                                                   |
|             |                         |                  | 910    | 2164  |                                                   |
|             |                         |                  | 645    | 1504  |                                                   |
|             |                         |                  | 740    | 1801  |                                                   |
|             |                         |                  | 565    | 2344  |                                                   |
|             |                         |                  | 605    | 2512  |                                                   |
|             |                         |                  | 610    | 2542  |                                                   |
|             |                         |                  | 625    | 2608  |                                                   |
|             |                         |                  | 475    | 1969  |                                                   |
|             |                         |                  | 430    | 1783  |                                                   |

Example: **HR2LEDT509PF827BN**

### DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

### FEATURES


- 2" aperture
- 30° visual cutoff angle for glare control
- 5 year warranty

### SPECIFICATIONS


|                    |                                                                                                                                        |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Construction:      | Die-cast aluminum construction                                                                                                         |
| Power:             | 14.5W                                                                                                                                  |
| Input:             | 120-277 VAC, 50/60Hz                                                                                                                   |
| Dimming:           | ELV: 100-5% , 0-10V: 100-0%                                                                                                            |
| Light Source:      | Integrated LED<br>3 Step Mac Adam Ellipse                                                                                              |
| Rated Life:        | 50000 Hours                                                                                                                            |
| Mounting:          | Heavy gauge retention clips support trim firmly                                                                                        |
| Finish:            | Electrostatically Powder Coated:White, Electrostatically Powder Coated::Copper Bronze, Electrostatically Powder Coated::Brushed Nickel |
| Ceiling Thickness: | 1/2" - 3/4"                                                                                                                            |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                                                                                          |
| Standards:         | ETL, cETL, Damp Location Listed, Title 24 JA8-2019 Compliant                                                                           |



### FINISHES:



### LINE DRAWING:



## Tesla Pro 2"

### Open Reflector Square

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

| Model      | Beam                    | Color Temp & CRI | Lumens | CBCP  | Finish            |
|------------|-------------------------|------------------|--------|-------|-------------------|
| HR2LED709P | F 45°<br>N 30°<br>S 15° | 827 2700K - 85   | 795    | 1073  | BN Brushed Nickel |
|            |                         | 830 3000K - 85   | 825    | 1089  | CB Copper Bronze  |
|            |                         | 835 3500K - 85   | 880    | 1189  | WT White          |
|            |                         | 840 4000K - 85   | 900    | 1213  |                   |
|            |                         | 927 2700K - 90   | 620    | 847.8 |                   |
|            |                         | 930 3000K - 90   | 725    | 989.1 |                   |
|            |                         |                  | 810    | 1844  |                   |
|            |                         |                  | 845    | 1919  |                   |
|            |                         |                  | 910    | 2079  |                   |
|            |                         |                  | 935    | 2163  |                   |
|            |                         |                  | 660    | 1510  |                   |
|            |                         |                  | 755    | 1721  |                   |
|            |                         |                  | 665    | 3182  |                   |
|            |                         |                  | 675    | 3411  |                   |
|            |                         |                  | 695    | 3450  |                   |
|            |                         |                  | 525    | 3541  |                   |
|            |                         |                  | 475    | 2674  |                   |
|            |                         |                  |        | 2420  |                   |

Example: **HR2LED709PF827BN**

#### DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

#### FEATURES


- 2" aperture
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 5 year warranty

#### SPECIFICATIONS

|                           |                                                                                  |
|---------------------------|----------------------------------------------------------------------------------|
| <b>Construction:</b>      | Die-cast aluminum construction                                                   |
| <b>Power:</b>             | 14.5W                                                                            |
| <b>Input:</b>             | 120-277 VAC, 50/60Hz                                                             |
| <b>Dimming:</b>           | ELV: 100-5% , 0-10V: 100-0%                                                      |
| <b>Light Source:</b>      | Integrated LED<br>3 Step Mac Adam Ellipse                                        |
| <b>Rated Life:</b>        | 50000 Hours                                                                      |
| <b>Mounting:</b>          | Heavy gauge retention clips support trim firmly                                  |
| <b>Finish:</b>            | Electroplated:Brushed Nickel, Electroplated::Copper Bronze, Electroplated::White |
| <b>Ceiling Thickness:</b> | 1/2" - 3/4"                                                                      |
| <b>Operating Temp:</b>    | -4°F to 104°F (-20°C to 40°C)                                                    |
| <b>Standards:</b>         | ETL, cETL, Damp Location Listed, Title 24 JA8-2019 Compliant                     |



#### FINISHES:



#### LINE DRAWING:

