


# HR-LED231R

## 1" LEDme® Miniature Recessed Spot

# WAC LIGHTING

Responsible Lighting®

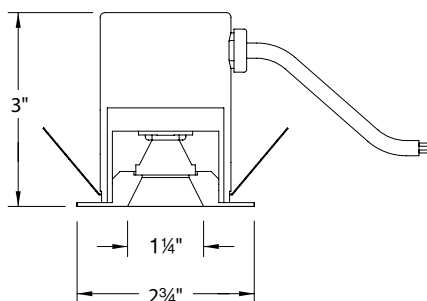

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Round recessed trim with interior open reflector for use with a remote driver. Perfect for use under cabinets or in wall niches. Includes one 3.5W LED.

### FEATURES

- 1" aperture
- Cutout: 2½"
- Less than ⅛" thick, super low profile trim
- Narrow flood beam spread
- 25° visual cut-off angle
- 350° horizontal rotation
- 100,000 hour rated life
- 5 year WAC Lighting product warranty

### FIXTURE PERFORMANCE

Model #	Color Temp	Watt	Lumens	Efficacy	CRI
HR-LED231R-27	2700K	3W*	160	53.3 Lm/W	85
HR-LED231R-W	3000K	3W*	160	53.3 Lm/W	85
HR-LED231R-35	3500K	3W*	170	56.7 Lm/W	80
HR-LED231R-C	4500K	3W*	201	67.0 Lm/W	75

\*Power consumption may vary depending on the efficiency of the system being used.

### ORDER NUMBER

Model #	Color Temp	Finish
HR-LED231R	27 2700K	BN Brushed Nickel
	W 3000K	GM Gun Metal
	35 3500K	WT White
	C 4500K	

### FINISHES

BN



GM



WT



### REPLACEMENT MODULES

Model #	Color Temp
RM1X3-27-DL	2700K
RM1X3-30-DL	3000K
RM1X3-35-DL	3500K
RM1X3-45-DL	4500K

HR-LED231R

Example: HR-LED231R-C-GM

### LEDme® REMOTE DRIVERS

Model #	Description	Type	Dimming	Wattage	Dimensions
LD-700MA03-EDIM-IS	Electronic low voltage	Hardwire	Yes	3.5W	L: 5½" W: 1½" H: 1½"
LD-700MA09-EDIM-IS	Electronic low voltage	Hardwire	Yes	9W	L: 7½" W: 3½" H: 1½"
LED-700MA12-P	Electronic low voltage	Plug-In	No	12W	L: 5" W: 3½" H: 1½"

See individual driver spec sheets for complete information.

### MULTIPLE TERMINAL BLOCK

Model #	Dimensions
MTB-01	L: 3¼" W: 1¼" H: ⅞"

12.5A max accommodates up to 6 output connections for 14 AWG wires.

### WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585