


EXTERMINATOR – model: H/L/J-LED20

LEDme® 120V Track Luminaire

WAC LIGHTING

Responsible Lighting®

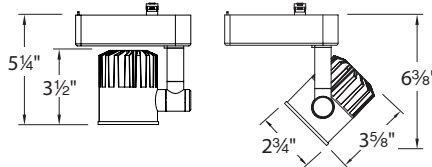

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

LEDme® Exterminator offers superior light output in a small, unobtrusive design. The high output LEDs out perform a 20W metal halide fixture at the size of a typical MR16 luminaire. Developed for upscale residential and commercial environments.

FEATURES

- Energy Star® rated
- Free of projected heat and UV and IR radiation
- Available in two interchangeable optics that may be ordered separately
- Replaceable LED modules
- Accommodates 1 lens or accessory
- 355° horizontal and 180° vertical aiming
- Lockable vertical aiming for precise adjustments
- 60,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum with removable lens cap for easy change of lenses or accessories

Driver: Input voltage: 120VAC

Light Source: High output COB LED.

Dimming: LED lamp dims down to 5% with electronic low voltage (ELV) dimmer. Compatible with LUTRON DVELV-300P and SELV-300P

Finish: Black (BK) and White (WT) powder coat paint

Standards: ETL & cETL Listed. Energy Star rated.

FIXTURE PERFORMANCE

Model #	Beam	Voltage	Color Temp	Power	Lumens	Efficacy	CBCP	CRI
LED20S-927	20°	120V	2700K	23W	1085	47 Lm/W	5178	90
LED20F-927	40°				1135	49 Lm/W	2462	
LED20S-27	20°	120V	2700K	23W	1230	53 Lm/W	5853	85
LED20F-27	40°				1230	53 Lm/W	2586	
LED20S-930	20°	120V	3000K	23W	1190	52 Lm/W	5509	90
LED20F-930	40°				1160	50 Lm/W	2518	
LED20S-30	20°	120V	3000K	23W	1345	58 Lm/W	6232	85
LED20F-30	40°				1280	56 Lm/W	2692	
LED20S-35	20°	120V	3500K	23W	1400	61 Lm/W	6620	85
LED20F-35	40°				1385	60 Lm/W	2897	
LED20S-40	20°	120V	4000K	23W	1450	63 Lm/W	6772	85
LED20F-40	40°				1390	60 Lm/W	2928	

REPLACEABLE LED MODULES

2700K (90 CRI)	BXRC-27G1000-B-23
2700K	BXRC-27E1000-B-23
3000K (90 CRI)	BXRC-30G1000-B-23
3000K	BXRC-30E1000-B-23
3500K	BXRC-35E1000-B-23
4000K	BXRC-40E1000-B-23

INTERCHANGABLE OPTICS

Model	Beam
RF-S	20°
RF-F	40°

ORDER NUMBER

Track Type	System	Model	Beam	Color Temp	Finish
Single-Circuit H, L, J/J2 Track	L H 120V J	LED20	S 20° F 40°	927 2700K (90 CRI) 27 2700K 930 3000K (90 CRI) 30 3000K 35 3500K 40 4000K	BK Black WT White


- **LED20** - -

Example: **L-LED20S-30-WT**

LENSES

Color Lens	LENS-16	AMB Amber BLU Blue GRN Green RED Red YEL Yellow	Frosted Lens Spread Lens Beam Elongating	LENS-16-FR LENS-16-SPR LENS-16-BEL
------------	---------	---	--	---

FINISHES



wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

FIXTURE PERFORMANCE – 2700K

 0° Aiming Angle (ceiling to floor)

LED20S-27

20° beam

Distance	FC	L	W
6 ft	163	2.1	2.1
9 ft	72	3.2	3.2
12 ft	41	4.2	4.2
15 ft	26	5.3	5.3

LED20F-27

40° beam

Distance	FC	L	W
6 ft	72	4.4	4.4
9 ft	32	6.6	6.6
12 ft	18	8.7	8.7
15 ft	11	10.9	10.9

 45° Aiming Angle (ceiling to wall)

LED20S-27

20° beam

Distance	FC	L	W
6 ft	57	4.4	3.0
9 ft	26	6.6	4.5
12 ft	14	8.7	6.0
15 ft	9	10.9	7.5

LED20F-27

40° beam

Distance	FC	L	W
6 ft	25	10.1	6.2
9 ft	11	15.1	9.3
12 ft	6	20.1	12.4
15 ft	4	25.2	15.4

FIXTURE PERFORMANCE – 3000K

 0° Aiming Angle (ceiling to floor)

LED20S-30

20° beam

Distance	FC	L	W
6 ft	173	2.1	2.1
9 ft	77	3.2	3.2
12 ft	43	4.2	4.2
15 ft	28	5.3	5.3

LED20F-30

40° beam

Distance	FC	L	W
6 ft	75	4.4	4.4
9 ft	33	6.6	6.6
12 ft	19	8.7	8.7
15 ft	12	10.9	10.9

 45° Aiming Angle (ceiling to wall)

LED20S-30

20° beam

Distance	FC	L	W
6 ft	61	4.4	3.0
9 ft	27	6.6	4.5
12 ft	15	8.7	6.0
15 ft	10	10.9	7.5

LED20F-30

40° beam

Distance	FC	L	W
6 ft	26	10.1	6.2
9 ft	12	15.1	9.3
12 ft	7	20.1	12.4
15 ft	4	25.2	15.4

LED20S-30

FIXTURE PERFORMANCE – 3500K

 0° Aiming Angle (ceiling to floor)

LED20S-35

20° beam

Distance	FC	L	W
6 ft	184	2.1	2.1
9 ft	82	3.2	3.2
12 ft	46	4.2	4.2
15 ft	29	5.3	5.3

LED20F-35

40° beam

Distance	FC	L	W
6 ft	80	4.4	4.4
9 ft	36	6.6	6.6
12 ft	20	8.7	8.7
15 ft	13	10.9	10.9

 45° Aiming Angle (ceiling to wall)

LED20S-35

20° beam

Distance	FC	L	W
6 ft	65	4.4	3.0
9 ft	29	6.6	4.5
12 ft	16	8.7	6.0
15 ft	10	10.9	7.5

LED20F-35

40° beam

Distance	FC	L	W
6 ft	28	10.1	6.2
9 ft	13	15.1	9.3
12 ft	7	20.1	12.4
15 ft	5	25.2	15.4

FIXTURE PERFORMANCE – 4000K

 0° Aiming Angle (ceiling to floor)

LED20S-40

20° beam

Distance	FC	L	W
6 ft	188	2.1	2.1
9 ft	84	3.2	3.2
12 ft	47	4.2	4.2
15 ft	30	5.3	5.3

LED20F-40

40° beam

Distance	FC	L	W
6 ft	81	4.4	4.4
9 ft	36	6.6	6.6
12 ft	20	8.7	8.7
15 ft	13	10.9	10.9

 45° Aiming Angle (ceiling to wall)

LED20S-40

20° beam

Distance	FC	L	W
6 ft	67	4.4	3.0
9 ft	30	6.6	4.5
12 ft	17	8.7	6.0
15 ft	11	10.9	7.5

LED20F-40

40° beam

Distance	FC	L	W
6 ft	29	10.1	6.2
9 ft	13	15.1	9.3
12 ft	7	20.1	12.4
15 ft	5	25.2	15.4

FC– Initial footcandle level at the center of the beam

L– Beam length at the point the candlepower drops off to 50% of maximum*

W– Beam width at the point the candlepower drops off to 50% of maximum*

*Measured in feet

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585