



# KT-CBLEDD24-22A-8XX-VDIM-P

## CENTER BASKET FIXTURE

### DESCRIPTION

2' x 2' 24W LED Center Basket Fixture | 120–277V Input | 0–10V Dimming | Premium Series

### APPLICATION

Used for commercial recessed ceiling applications



### PRODUCT FEATURES


- Architectural grade center basket volumetric design
- Powered by Keystone 0–10V dimming LED drivers
- Smooth diffused lens for even appearance
- 0–10V dimming, 10% minimum
- Compatible with Keystone SmartSafe emergency backups
- Compatible with Keystone occupancy sensors
- Ambient operating temperature: –20°C/–4°F to 50°C/122°F
- UL Listed 1598: Suitable for dry and damp locations
- THD: <20%
- PF: >0.95
- LED chip lifetime: L70 >100,000 hrs @ 25°C/77°F ambient fixture temp.
- Low optical flicker

### PRODUCT SPECIFICATIONS


Catalog Number	Color Temperature	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
KT-CBLEDD24-22A-835-VDIM-P	3500K	2 ft. x 2 ft.	120–277V	24W	>82.0	2,975 L	124 lm/W
KT-CBLEDD24-22A-840-VDIM-P	4000K	2 ft. x 2 ft.	120–277V	24W	>82.0	3,025 L	126 lm/W
KT-CBLEDD24-22A-850-VDIM-P	5000K	2 ft. x 2 ft.	120–277V	24W	>82.0	3,050 L	128 lm/W

### PHOTOMETRIC SPECIFICATIONS

#### ISOCANDELA PLOT

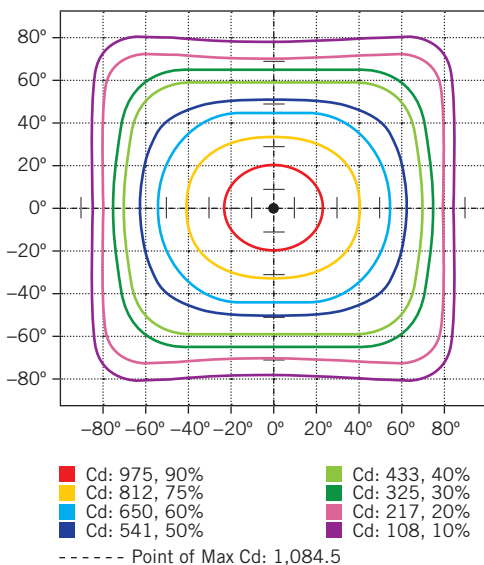

#### POLAR CANDELA DISTRIBUTION

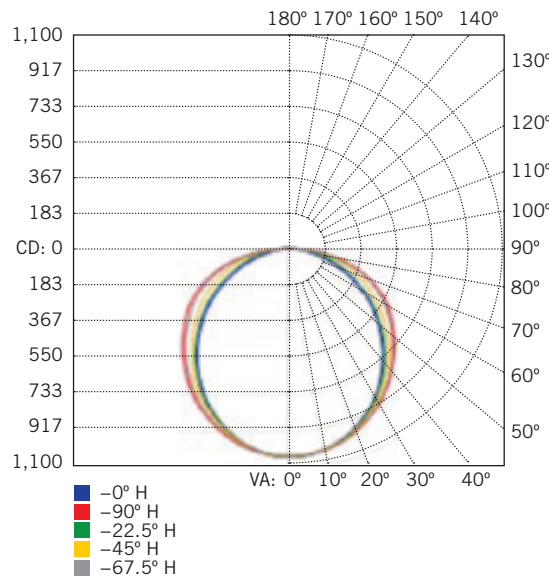

#### ZONAL LUMEN SUMMARY


Zone	Lumens	% Luminaire
0–30	831.4	25.7%
0–40	1,359.4	42.0%
0–60	2,427.4	75.0%
60–90	797.3	24.6%
70–100	377.4	11.7%
90–120	3.5	0.1%
0–90	3,224.8	99.7%
90–180	10.0	0.3%
0–180	3,234.8	100%



# KT-CBLED24-22A-8XX-VDIM-P

## CENTER BASKET FIXTURE

### PHYSICAL SPECIFICATIONS

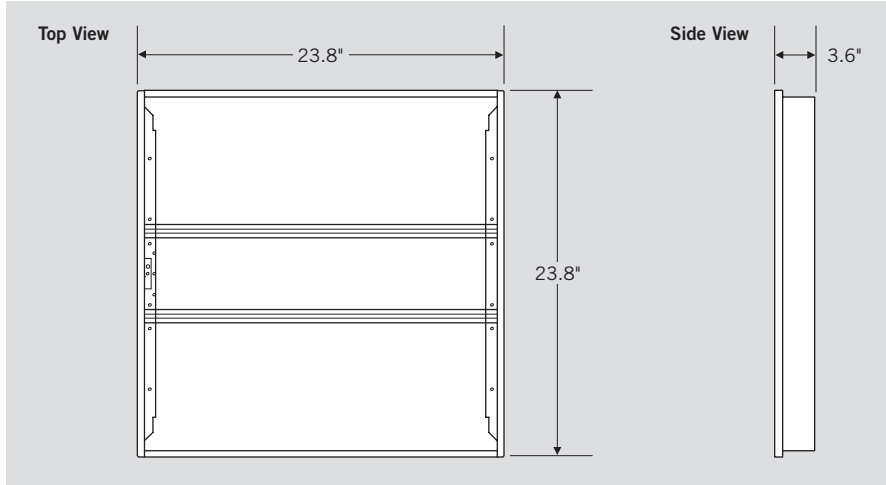

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QUANTITY	ITEM STATUS
KT-CBLED24-22A-835-VDIM-P-CP	Carton Pack	1	Active
KT-CBLED24-22A-840-VDIM-P-CP	Carton Pack	1	Active
KT-CBLED24-22A-850-VDIM-P-CP	Carton Pack	1	Active

### CATALOG NUMBER BREAKDOWN

# KT-CBLED24-22A-8XX-VDIM-P-CP

1
2
3
4
5
6
7
8
9
10

- 1** Keystone Technologies
- 2** Center Basket LED Fixture
- 3** Wattage
- 4** 2' x 2' Nominal Size
- 5** Lamp Type
- 6** 800 Series
- 7** Color Temperature
- 8** 0-10V Dimming
- 9** Premium Series
- 10** Packaging Style