



XFIT



KT-FLED75-R1A-UNV-8CSB-VDIM-W

COMPACT 75W GENERAL-PURPOSE LED FLOODLIGHT

DESCRIPTION

Compact 75W General-Purpose LED Floodlight | 120–277V Input |
3000–5000K | White Housing | Universal Mount

APPLICATION

Building or ground mount application for outdoor illumination
(landscapes, display signage, loading docks,
building façades, pathways, parking areas, and
other general site lighting requirements)



5 YEAR
WARRANTY



PRODUCT FEATURES

- Keystone Color Select technology (3000/4000/5000K)
- Uniform, wide flood design (NEMA 7H x 7V distribution pattern)
- Heavy-duty, die cast aluminum housing featuring built-in glare visor and tempered glass lens
- Powered by Keystone 0–10V dimming LED drivers
- Built-in dusk-to-dawn photocell behind translucent 3/4" threaded plug with anti-yellowing agent
- Heavy-duty slip fitter mount and trunnion mount options included
- Ambient operating temperature: –40°C/–40°F to 45°C/113°F
- UL listed for wet locations, IP65
- 0–10V dimming, 10% min
- Power Factor: >0.95
- THD: <20%
- LED chip lifetime: L70 >100,000 hrs @ 25°C/77°F ambient fixture temp
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions
- 18" input cable, pre-stripped
- Fixture impact rating IK07

PERFORMANCE SPECIFICATIONS

Catalog Number	Wattage	Selectable CCT *	Lumens	Efficacy	Input Voltage	Housing Color	CRI	Dimming	Mounting	Rated Life	Legacy Equivalent
KT-FLED75-R1A-UNV-8CSB-VDIM-W	75W	3000K	9150 lm	122 lm/W	120–277V	White	>80	0–10V	Universal: 2 3/8" Slip fitter or trunnion	50,000 hrs	250–320W MH
		4000K	10725 lm	143 lm/W							
		5000K	10050 lm	134 lm/W							


* Color Uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017

KT-FLED75-R1A-UNV-8CSB-VDIM-W


COMPACT 75W GENERAL-PURPOSE LED FLOODLIGHT

PHOTOMETRIC SPECIFICATIONS

ISOCANDELA PLOT

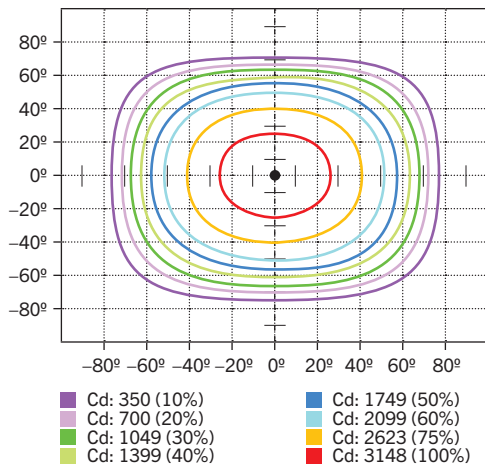

LUMINOUS INTENSITY DISTRIBUTION

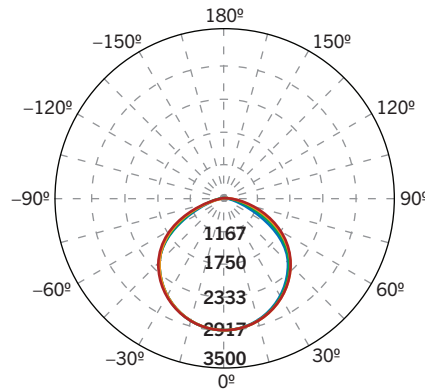

Average diffuse angle (50%): **114.2°**


- 1 Blue – 0° H
- 2 Red – 90° H
- 3 Green – 22.5° H
- 4 Orange – 45° H
- 5 Grey – 67.5° H

FLUX DISTRIBUTION


Zone	Lumens	% Luminaire
Forward Light	4,702 lm	49.6%
0°–30°	1,377 lm	14.4%
30°–60°	2,659 lm	27.8%
60°–80°	696 lm	7.3%
80°–90°	10 lm	0.1%
Back Light	4,814 lm	50.4%
0°–30°	1,366 lm	14.3%
30°–60°	2,644 lm	27.7%
60°–80°	788 lm	8.2%
80°–90°	16 lm	0.2%
Up Light	0 lm	0.0%
90°–100°	0 lm	0.0%
100°–180°	0 lm	0.0%

LIGHT DISTRIBUTION PATTERNS (Isometric view from above)

Building exterior mounted at
20', 30° below horizontal

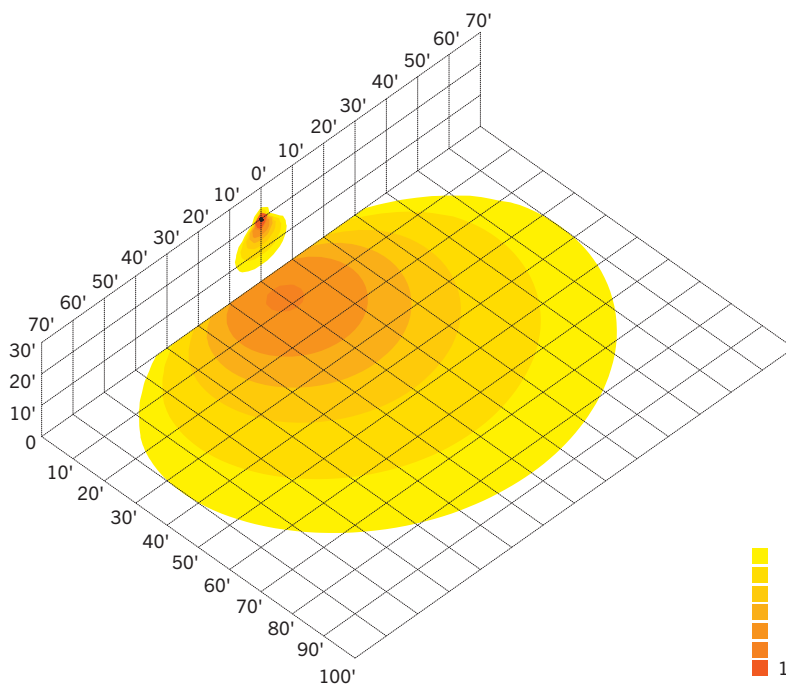

Ground mounted at 6" above ground,
10° above horizontal, shining towards building exterior
wall at 28' away

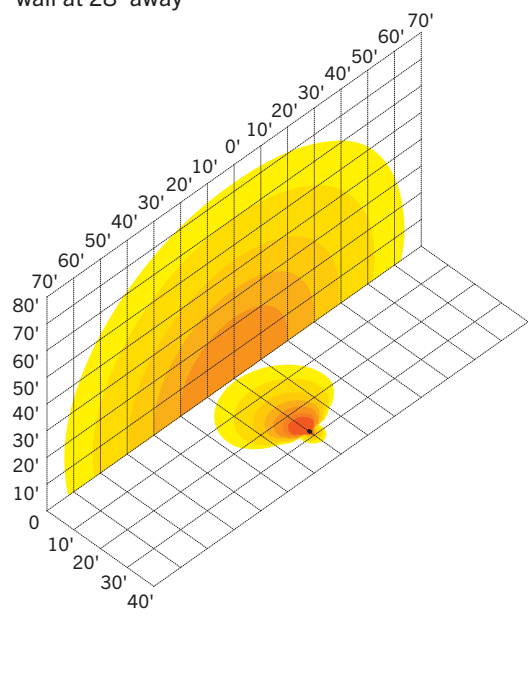


KT-FLED75-R1A-UNV-8CSB-VDIM-W


COMPACT 75W GENERAL-PURPOSE LED FLOODLIGHT

PHYSICAL SPECIFICATIONS

SLIP FITTER MOUNT

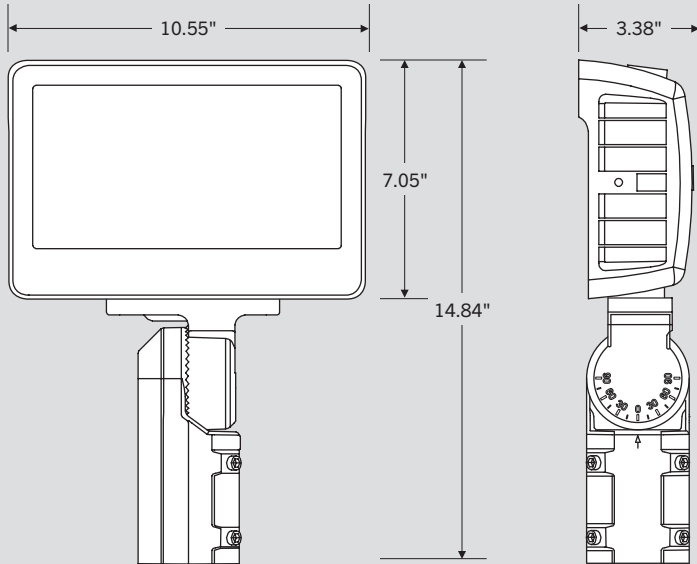

TRUNNION MOUNT

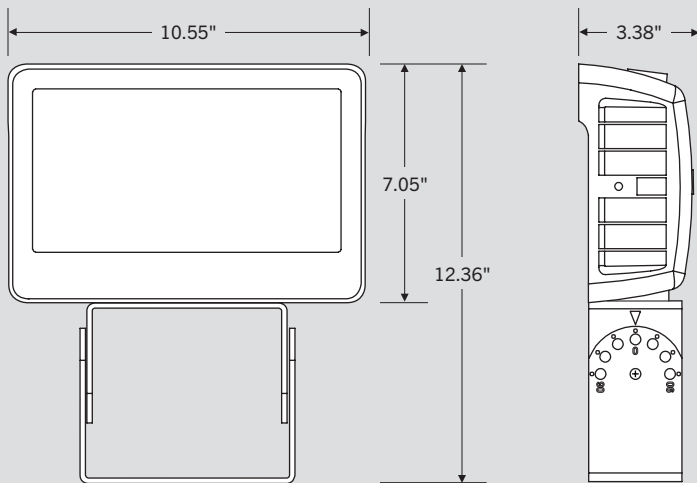

EPA

Mounted Vertical	0.62 sq/ft
Mounted Horizontal	0.30 sq/ft
Mounted 45°	0.65 sq/ft



XFIT




KT-FLED75-R1A-UNV-8CSB-VDIM-W

COMPACT 75W GENERAL-PURPOSE LED FLOODLIGHT

GENERAL SETUP INSTRUCTIONS

GENERAL WIRING DIAGRAM

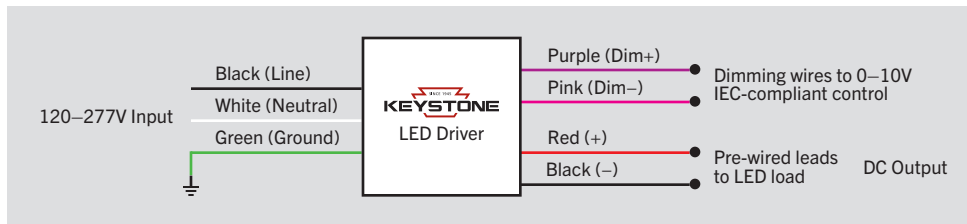

Caution: Before installing, make certain that AC power to the fixture is off.


Caution: The electrical rating of this product is 120–277V. Installer must confirm that there is 120–277V at the fixture before installation.

PHOTOCELL ENABLE/DISABLE

This fixture is equipped with a dusk-to-dawn photocell behind the translucent knock-out (KO) cover. Adjust the dip switch to enable (ON) or disable (OFF) the photocell function (see illustrations to the right). Fixture comes pre-set with photocell enabled unless otherwise noted.

COLOR SELECT (CCT) ADJUSTMENT

This fixture is equipped with Color Select technology. There is an adjustable dip switch behind the translucent knock-out (KO) cover to change CCT between 5000K, 4000K, and 3000K (see illustrations to the right). Fixture comes preset at 5000K unless otherwise noted.

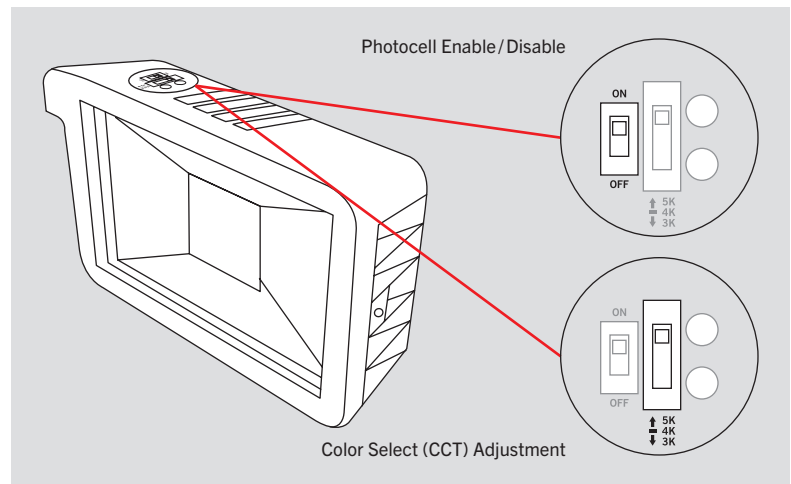

ACCESSORIES (SOLD SEPARATELY)

CORD SETS

Factory-Installable OR Field-Installable (field-installable options must be purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/515P6	KT-CS-515P-6-18/3	Cord set; 125V NEMA 5-15P; straight blade plug; 6' SJTOW cable; 18/3 wire	843654140124	UKH-26

* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).
Note: For cord sets not listed here, please contact your Keystone sales rep.



XFIT



KT-FLED75-R1A-UNV-8CSB-VDIM-W

COMPACT 75W GENERAL-PURPOSE LED FLOODLIGHT

ACCESSORIES (continued)

MOUNTS AND BRACKETS

Field-Installable (field-installable options must be purchased separately)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-FLED-KM-1-KIT	Knuckle Mount for 75W and 100W Rectangular Series 1 LED Floodlight. Includes Mounting Hardware. Standard Bronze Housing.	843654146836	JAR-10
KT-FLED-WG-4-KIT	Wire guard for 75W and 100W Rectangular Series 1 LED Floodlight	843654138855	EFZ-60



ORDERING INFORMATION

CATALOG NUMBER	PACK QTY.	UPC	EASY CODE	DLC PRODUCT ID
KT-FLED75-R1A-UNV-8CSB-VDIM-W	1	843654149622	QEP-59	PSBSKE1P
				S-GW4BX7
				S-N0LI5R

