

# KT-LED15T5HO-36G-8XX-E /G2

## T5HO LED LAMP

### DESCRIPTION

15W T5 LED Tube | Type C | 3500–5000K | > 82 CRI | 0–10V Dimming



|                                          |
|------------------------------------------|
| <b>LAMP TYPE:</b> Linear                 |
| <b>BULB TYPE:</b> T5 LED                 |
| <b>BASE TYPE:</b> G5                     |
| <b>DIMMING TYPE:</b> 0–10V               |
| <b>WATTAGE:</b> 15.5W                    |
| <b>LAMP INPUT VOLTAGE:</b> 36–45Vdc      |
| <b>COLOR TEMPERATURE:</b> 3500–5000K     |
| <b>COLOR RENDERING INDEX (CRI):</b> > 82 |




### PRODUCT FEATURES

- UL Type C LED tubes, powered by Keystone Type C LED drivers
- UL Classified Std. 1598C
- Glass construction with metal end caps
- Operating temperature: –20°C/–4°F to 45°C/113°F
- THD <15% at full driver load
- PF > 0.90 at full driver load
- 0–10V dimmable
- 70,000+ hours lifetime
- Keystone tube and driver pairing wires either single-ended or double-ended. See wiring diagrams for details and common ballast retrofit scenarios
- Low optical flicker

### LAMP SPECIFICATIONS

|                            |             | Driver: KTLD-2LT5HO-UV-15C-VDIM /G2 |                |                  |                     |                |                  | Driver: KTLD-4LT5HO-UV-15C-VDIM /G2 |                |                  |                     |                |                  |              |
|----------------------------|-------------|-------------------------------------|----------------|------------------|---------------------|----------------|------------------|-------------------------------------|----------------|------------------|---------------------|----------------|------------------|--------------|
|                            |             | 1 Lamp                              |                |                  | 2 Lamps             |                |                  | 3 Lamps                             |                |                  | 4 Lamps             |                |                  |              |
| Catalog Number             | Color Temp. | Nominal Input Power                 | Nominal Lumens | Nominal Efficacy | Nominal Input Power | Nominal Lumens | Nominal Efficacy | Nominal Input Power                 | Nominal Lumens | Nominal Efficacy | Nominal Input Power | Nominal Lumens | Nominal Efficacy | Power Factor |
| KT-LED15T5HO-36G-835-E /G2 | 3500K       | 18W                                 | 2050 lm        | 114 lm/W         | 36W                 | 4100 lm        | 114 lm/W         | 54W                                 | 6150 lm        | 114 lm/W         | 72W                 | 8200 lm        | 114 lm/W         | > 0.9        |
| KT-LED15T5HO-36G-840-E /G2 | 4000K       | 18W                                 | 2100 lm        | 117 lm/W         | 36W                 | 4200 lm        | 117 lm/W         | 54W                                 | 6300 lm        | 117 lm/W         | 72W                 | 8400 lm        | 117 lm/W         | > 0.9        |
| KT-LED15T5HO-36G-850-E /G2 | 5000K       | 18W                                 | 2100 lm        | 117 lm/W         | 36W                 | 4200 lm        | 117 lm/W         | 54W                                 | 6300 lm        | 114 lm/W         | 72W                 | 8400 lm        | 117 lm/W         | > 0.9        |

### SPECTRAL DISTRIBUTION

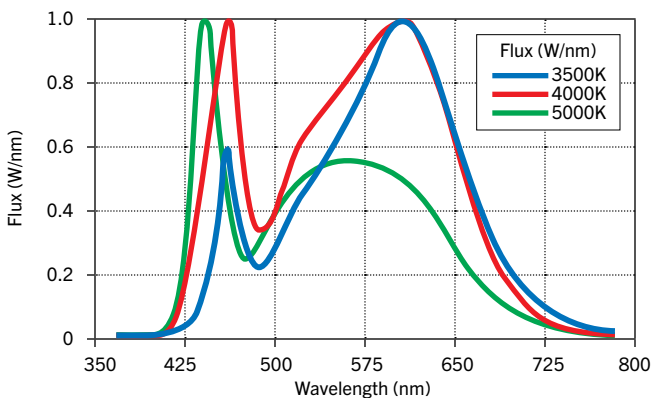

### RATED LIFE

L70 (Hours) 70,000

BEAM ANGLE: 160°

VISIBLE LIGHT AREA: 325°



# KT-LED15T5HO-36G-8XX-E /G2

## T5HO LED LAMP

### DRIVER SPECIFICATIONS

| Catalog Number              | Description                                                        | Dimensions            |
|-----------------------------|--------------------------------------------------------------------|-----------------------|
| KTLD-2LT5HO-UV-15C-VDIM /G2 | Driver for (2) 2' T5HO Type C lamps; 120–277V input, 0–10V dimming | 1.10" x 1.32" x 9.53" |
| KTLD-4LT5HO-UV-15C-VDIM /G2 | Driver for (4) 2' T5HO Type C lamps; 120–277V input, 0–10V dimming | 1.24" x 1.61" x 9.69" |

### PHYSICAL CHARACTERISTICS

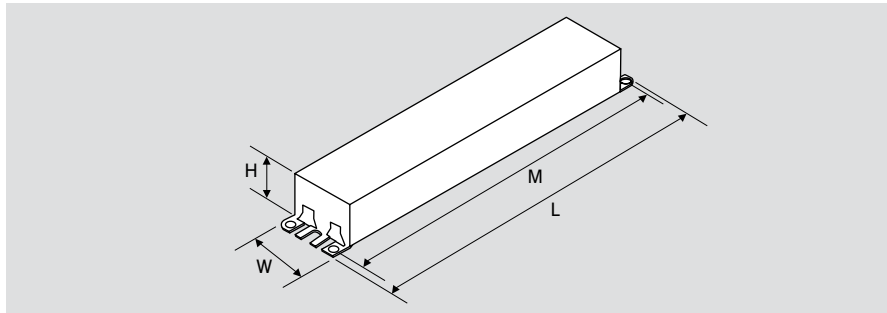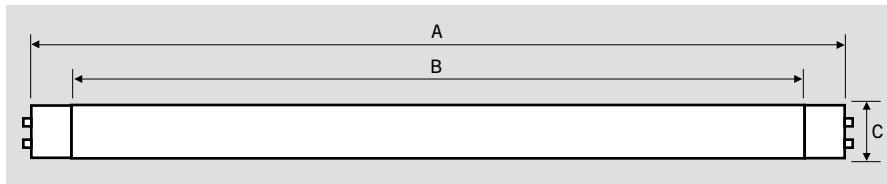

#### LAMP DIMENSIONS

|                        |        |
|------------------------|--------|
| A (Body Length)        | 33.49" |
| B (Illuminated Length) | 33.43" |
| C (Diameter)           | 0.67"  |

NOMINAL LENGTH: 36"

BASE TYPE: G5

#### DRIVER DIMENSIONS


| KTLD-2LT5HO-UV-15C-VDIM /G2 |       | KTLD-4LT5HO-UV-15C-VDIM /G2 |       |
|-----------------------------|-------|-----------------------------|-------|
| L (Length)                  | 9.53" | L (Length)                  | 9.69" |
| W (Width)                   | 1.32" | W (Width)                   | 1.61" |
| H (Height)                  | 1.10" | H (Height)                  | 1.24" |
| M (Mounting)                | 8.94" | M (Mounting)                | 9.09" |

### WIRING INSTRUCTIONS


- Shut off power.
- Remove existing fluorescent tube(s) and diffuser (if applicable).
- Open ballast compartment cover, cut all wires (as shown below), and remove existing ballast. Disconnect starter (if applicable).

#### TYPICAL BALLAST CONFIGURATIONS

##### 4-Lamp Wiring

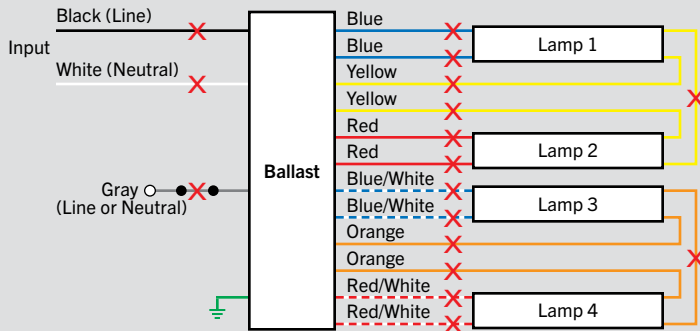

##### 2-Lamp Wiring

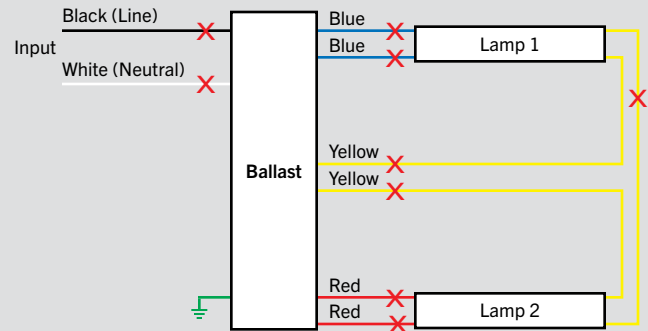

(continued on page 3)

# KT-LED15T5HO-36G-8XX-E /G2


## T5HO LED LAMP

### WIRING INSTRUCTIONS *(continued)*


- Check the mounting holes of ballast to see whether they are suitable to install LED driver. If not, drill new holes for mounting. Install LED driver to luminaire using screws.
- Wire according to diagrams (as shown below). **Note: Do not leave any loose wires exposed.**

#### RETROFIT WIRING

##### 4-Lamp Wiring Configuration

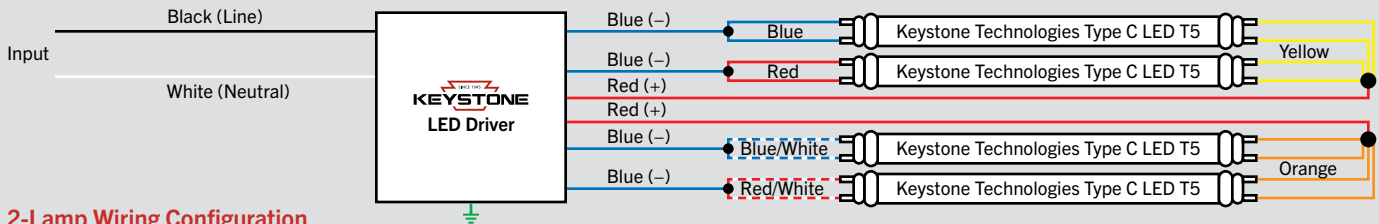


##### 2-Lamp Wiring Configuration

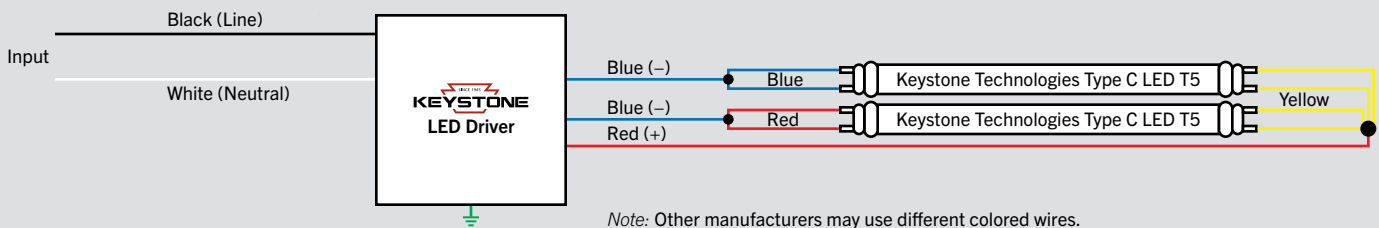


#### NEW INSTALLATION: DOUBLE-ENDED WIRING

##### 4-Lamp Wiring Configuration

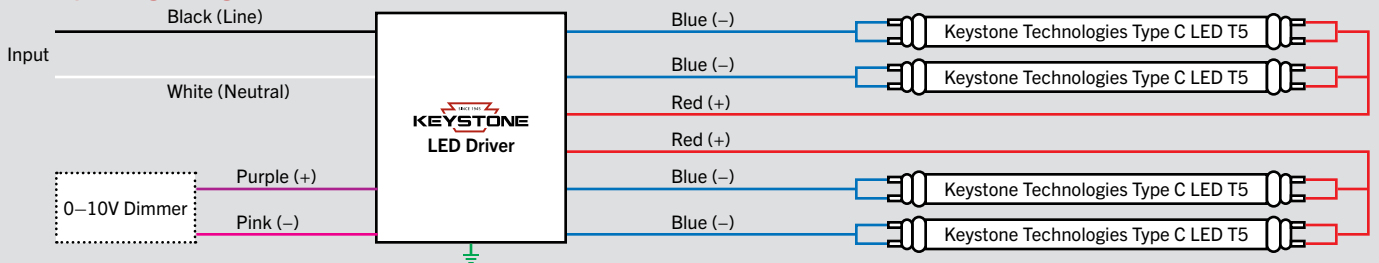

##### 2-Lamp Wiring Configuration

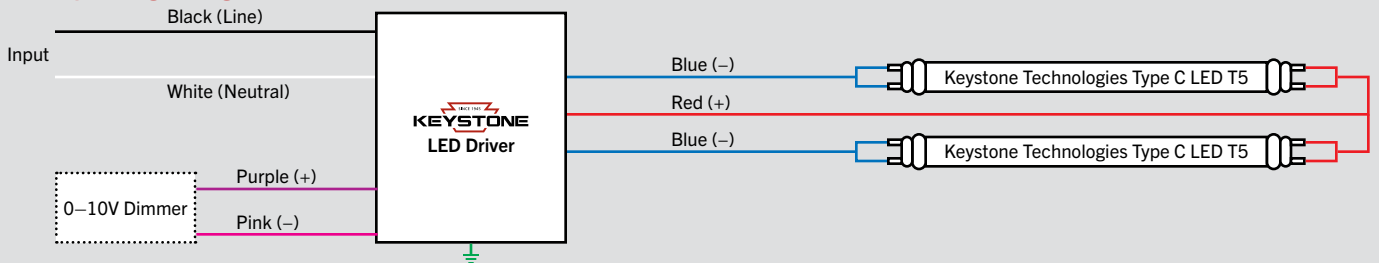

*(continued on page 4)*


# KT-LED15T5HO-36G-8XX-E /G2

## T5HO LED LAMP


### WIRING INSTRUCTIONS (continued)

#### NEW INSTALLATION: SINGLE-ENDED WIRING

##### 4-Lamp Wiring Configuration

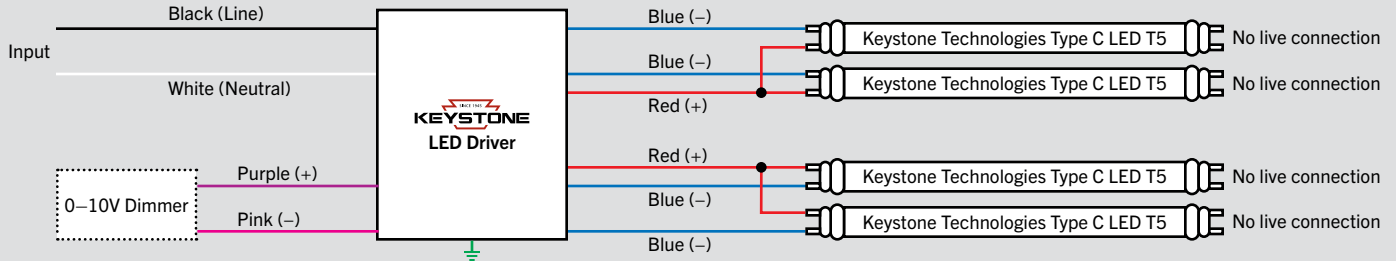

##### 2-Lamp Wiring Configuration

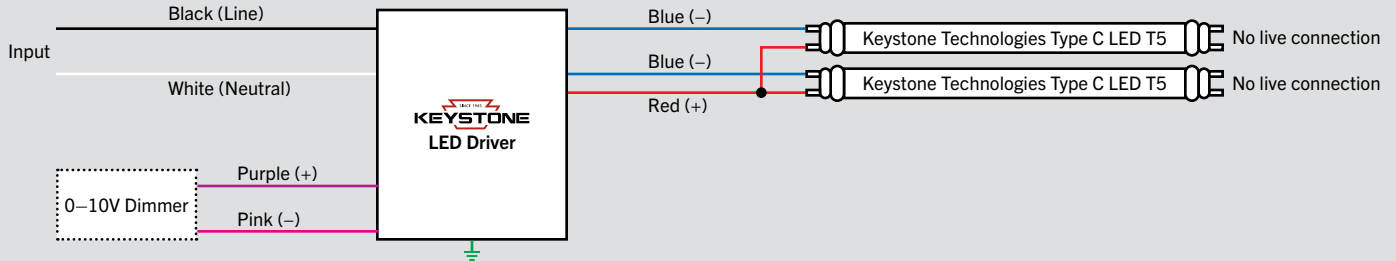

Note: In accordance with NEC-20 410.69 2022, all 0-10V negative wires have been updated from gray to pink. Please contact Keystone for details.

6. Close compartment cover and make sure live parts are not accessible. Affix field-applied label in a visible section inside the luminaire.
7. Install the LED tubes and cover the diffuser (if applicable).
8. Turn on power and verify that the tubes are working correctly. If not, immediately turn off power and contact Keystone Technologies.

### ORDERING INFORMATION

| ORDER CODE                 | PACK QTY. | EASY CODE | UPC          |
|----------------------------|-----------|-----------|--------------|
| KT-LED15T5HO-36G-835-E /G2 | 25        | EJP-38    | 843654141244 |
| KT-LED15T5HO-36G-840-E /G2 | 25        | ICR-15    | 843654141251 |
| KT-LED15T5HO-36G-850-E /G2 | 25        | YFK-56    | 843654141268 |

### CATALOG NUMBER BREAKDOWN

# KT-LED15T5HO-36G-8XX-E /G2

| 1                       | 2          | 3         | 4           | 5                         | 6                    | 7     | 8                   | 9                       | 10              |
|-------------------------|------------|-----------|-------------|---------------------------|----------------------|-------|---------------------|-------------------------|-----------------|
| 1 Keystone Technologies | 2 LED Lamp | 3 Wattage | 4 Lamp Type | 5 Nominal Length (Inches) | 6 Glass Construction | 7 CRI | 8 Color Temperature | 9 External Drive Series | 10 Generation 2 |