



XFIT

CATALOG NUMBER: KT-MSLED28-4-8XX-VDIM-P



DESCRIPTION

28W Micro LED Strip, 4' Long, 120-277V Input, Frosted Lens, 0-10V Dimmable, Premium Series



APPLICATION

Used for Commercial, Retail, and Residential Strip Applications


PRODUCT FEATURES

- Powered by Keystone 0-10V dimming LED drivers
- Smooth diffused lens for an even appearance
- 0-10V dimming, 10% minimum
- Compatible with Keystone SmartSafe emergency LED drivers
- Compatible with Keystone 480-277V step down transformers
- Compatible with Keystone occupancy sensors
- Ambient operating temperature: -20°C/-4°F to 50°C/122°F
- UL Listed 1598: Suitable for dry and damp locations
- THD: <20%
- Power factor > 0.95
- L70 >50,000 hours

PERFORMANCE SPECIFICATIONS

Catalog Number	Color Temp	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
KT-MSLED28-4-835-VDIM-P	3500K	4'	120-277V	28	>82	3584	128
KT-MSLED28-4-840-VDIM-P	4000K	4'	120-277V	28	>82	3640	130
KT-MSLED28-4-850-VDIM-P	5000K	4'	120-277V	28	>82	3696	132

PHOTOMETRIC SPECIFICATIONS

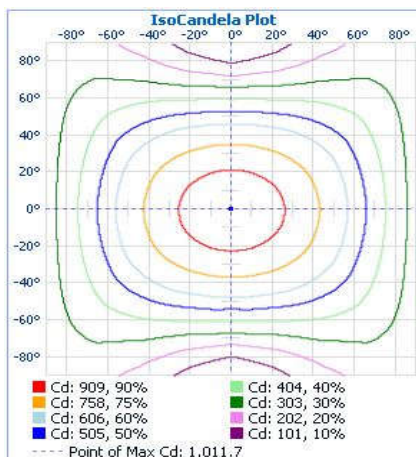


Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	782.1	21.8%
0-40	1,283.2	35.8%
0-60	2,307.4	64.4%
60-90	949.1	26.5%
70-100	668.2	18.7%
90-120	267.1	7.5%
0-90	3,256.5	90.9%
90-180	324.7	9.1%
0-180	3,581.2	100%



CATALOG NUMBER: **KT-MSLED28-4-8XX-VDIM-P**

PHYSICAL SPECIFICATIONS

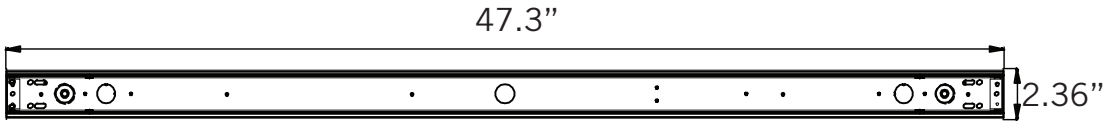

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-MSLED28-4-835-VDIM-P	Carton Pack	1	Active
KT-MSLED28-4-840-VDIM-P	Carton Pack	1	Active
KT-MSLED28-4-850-VDIM-P	Carton Pack	1	Active

CATALOG NUMBER BREAKDOWN

KT-MSLED28-4-8XX-VDIM-P

Keystone Technologies

LED Micro Strip Fixture

Wattage

4' Nominal

CRI 80

Color Temp.

0-10V Dimming

Premium Series