

## KT-WPLED60-M2-8XX-VDIM

### ARCHITECTURAL FULL-CUTOFF LED WALL PACK

#### DESCRIPTION

Architectural 60W Full-Cutoff LED Wall Pack | 120–277V Input | 4000–5000K | Medium Housing | Bronze Finish | Wide Optic Lens

#### APPLICATION

Building mount for exterior illumination (perimeters, pathways, loading docks, and other general security lighting requirements)



#### PRODUCT FEATURES

- Architectural full cutoff design that improves building appearance and optimizes functional light distribution
- Heavy duty die cast aluminum housing with (5) 1/2" threaded conduit hubs: (1) on back and (1) on all four sides
- Powered by Keystone 0–10V dimming LED drivers
- Dark Sky friendly performance that eliminates undesirable sky glow and glare
- Features one translucent 3/4" threaded plug with anti-yellowing agent for use with photocell accessory KT-WPLED-PS-UV-KO, sold separately
- Precision-crafted optical lens that provides wide distribution pattern ideal for increased fixture spacing and uniformity
- Covers footprint of mid-size HID wallpacks
- Ambient operating temperature: –40°C/–40°F to 50°C/122°F
- UL Certified for wet locations; IP65 rated
- Fixture impact rating IK08
- Power Factor: >0.95
- THD: <20%
- LED chip lifetime: L70 >100,000 hrs @ 25°C/77°F ambient fixture temperature
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions
- **Compatible with Keystone LED Emergency Backups. See Accessories page for more details**

#### PRODUCT SPECIFICATIONS


Catalog Number	Wattage	Lumens	Lumens Below 90°	Dimming	CCT	Efficacy	CRI	Housing Color	Input Voltage	Rated Life	Legacy Equivalent
KT-WPLED60-M2-840-VDIM	60W	7500	7445	0–10V	4000K	125 lm/W	>80	Bronze	120–277V	50,000 hrs	250W MH
KT-WPLED60-M2-850-VDIM		7800	7745		5000K	130 lm/W					

# KT-WPLED60-M2-8XX-VDIM


## ARCHITECTURAL FULL-CUTOFF LED WALL PACK

### PHOTOMETRIC SPECIFICATIONS

#### ISOCANDELA PLOT

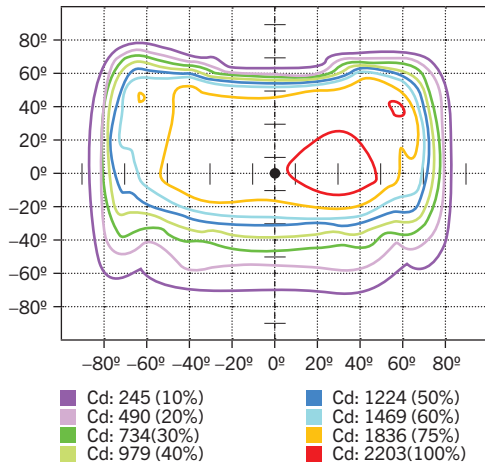

#### LUMINOUS INTENSITY DISTRIBUTION

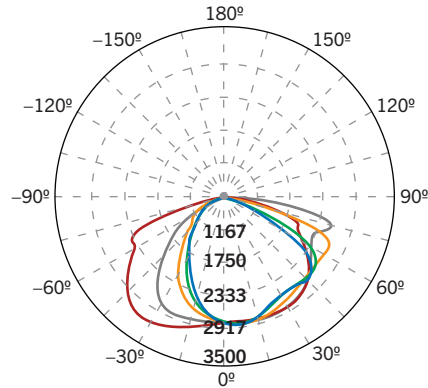

Average diffuse angle (50%): **114.2°**


- 1 Blue – 0° H
- 2 Red – 90° H
- 3 Green – 22.5° H
- 4 Orange – 45° H
- 5 Grey – 67.5° H

#### FLUX DISTRIBUTION

Zone	Lumens	% Luminaire
<b>Forward Light</b>	4,722 lm	65.0%
0°–30°	907 lm	12.5%
30°–60°	2,329 lm	32.0%
60°–80°	1,327 lm	18.3%
80°–90°	159 lm	2.2%
<b>Back Light</b>	2,520 lm	34.6%
0°–30°	772 lm	10.6%
30°–60°	1,249 lm	17.2%
60°–80°	454 lm	6.2%
80°–90°	45 lm	0.6%
<b>Up Light</b>	25 lm	0.4%
90°–100°	4 lm	0.1%
100°–180°	21 lm	0.3%


#### MOUNTING

Side view



#### LIGHT DISTRIBUTION PATTERN


Isometric view from above; Luminaire mounted at 15'

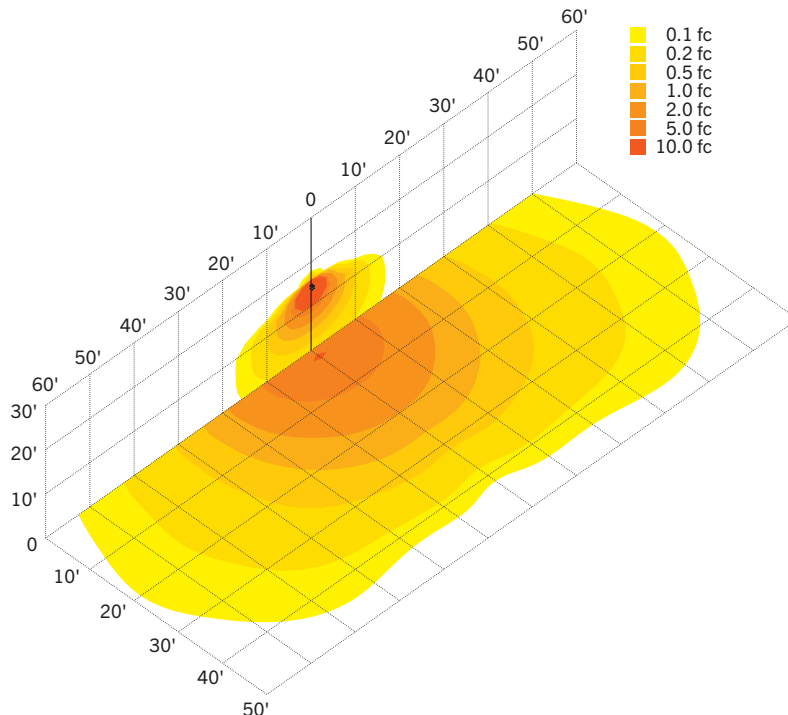

# KT-WPLED60-M2-8XX-VDIM


## ARCHITECTURAL FULL-CUTOFF LED WALL PACK

### PHYSICAL SPECIFICATIONS

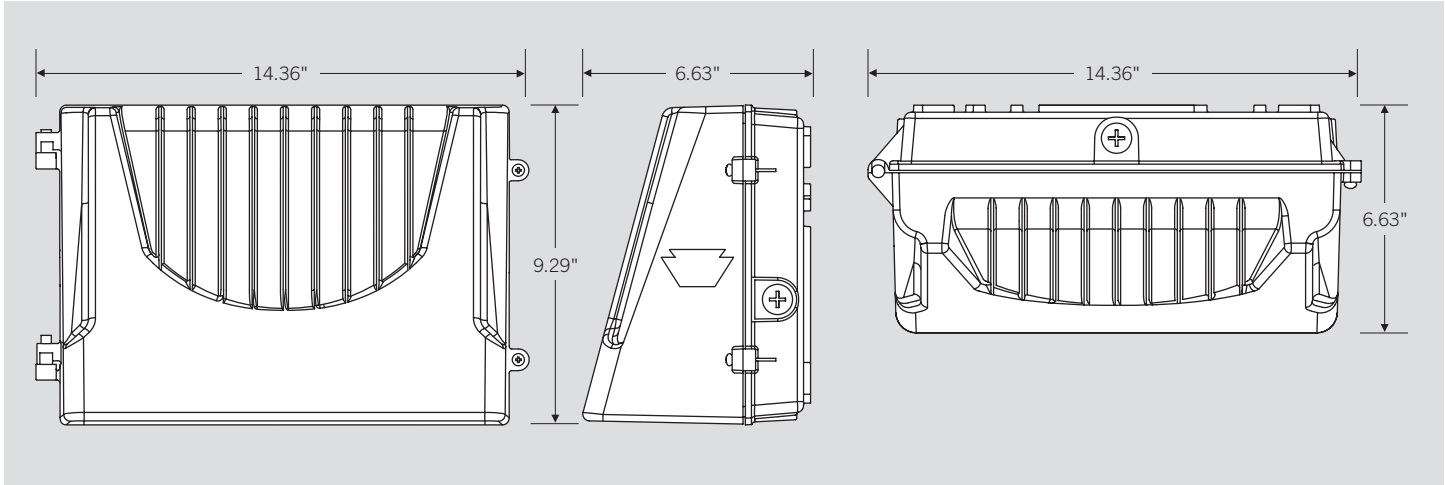

### GENERAL SETUP INSTRUCTIONS

#### GENERAL WIRING DIAGRAM

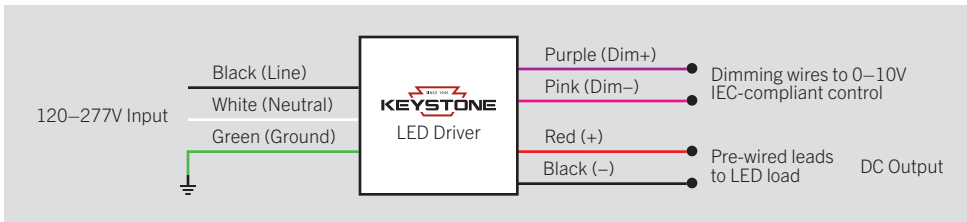

**Caution:** Before installing, make certain that AC power to the fixture is off.

**Caution:** The electrical rating of this product is 120–277V. Installer must confirm that there is 120–277V at the fixture before installation.

# KT-WPLED60-M2-8XX-VDIM

## ARCHITECTURAL FULL-CUTOFF LED WALL PACK

### ACCESSORIES

#### SENSORS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/MW3	KTS-MW3-UV-KO-K1	Microwave Sensor Kit, Includes 120-277V input to 12V DC convertor & 12V input sensor head, IP65. Bi-Level Control with Adjustable Hold Time, Dim Level and Standby Time. Installs via standard 1/2in KO	843654134147	BKG-51
	/PS	KT-WPLED-PS-UV-KO	Dawn to Dusk Photocell for WallPack fixtures. Fits M1, M2, L1 housings. 120-277V Input. Install via standard 1/2in KO	843654129198	DLU-58



Microwave Sensor Kit  
KTS-MW3-UV-KO-K1



Dawn to Dusk Photocell  
KT-WPLED-PS-UV-KO

\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

#### CORD SETS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/515P6	KT-CS-515P-6-18/3	Cord set for high bay; 125V NEMA 5-15P; straight blade plug; 6' SJTOW cable; 18/3 wire	843654140124	UKH-26
	/L515P6	KT-CS-L515P-6-16/3	Cord set for high bays; 250V NEMA L5-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140186	POC-82



Cord Sets

\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).  
**Note:** For cord sets not listed here, please contact your Keystone sales rep.

(Accessories continued on next page)

# KT-WPLED60-M2-8XX-VDIM

## ARCHITECTURAL FULL-CUTOFF LED WALL PACK

### ACCESSORIES (continued)

#### EMERGENCY BACKUP

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/EM12	KT-EMRG-LED-12C-1200	LED Emergency Back-Up, 12W Constant Wattage Design. Approx 1200 Lumens. 120-277V Input. Remote Compact Battery Pack. CEC T20 Compliant.	843654103112	OJQ-32
	-	KT-EMRG-LED2-TS-IP65	IP65 Rated Wet Location Test Switch for 5W and 12W CEC Compliant LED Emergency Packs	843654130019	MDB-29



12W, 1200 lumen Battery Backup  
KT-EMRG-LED-12C-1200



Wet Location Test Switch  
KT-EMRG-LED2-TS-IP65

\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).  
 † Factory installation of emergency backup units will automatically include any relevant mounting bracket.

#### MOUNTS AND BRACKETS

Field-Installable / Field-Use ONLY (purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	-	KT-WPLED-BP-M	Back Plate for Medium Size Wallpacks, Covers Legacy Style Large HID Housing Dimensions. Standard Bronze Color.	843654130613	CCJ-21



Back Plate  
KT-WPLED-BP-M

\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).  
 Note: This is needed with EM - will be added when factory installing EM

#### SURGE PROTECTORS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/10KV	KTSP-10KV-C	External Surge Protector, compact design. Parallel Wiring, 120-277V Input, Max Peak Protection (10KV, 10KA)	843654129204	BUU-26



External Surge Protector  
KTSP-10KV-C

\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).



# KT-WPLED60-M2-8XX-VDIM

## ARCHITECTURAL FULL-CUTOFF LED WALL PACK

### ORDERING INFORMATION

CATALOG NUMBER	PACK QTY.	EASY CODE	UPC
KT-WPLED60-M2-840-VDIM	1	VMR-18	843654129075
KT-WPLED60-M2-850-VDIM	1	OYW-93	843654129082

### CATALOG NUMBER BREAKDOWN

# KT-WPLED60-M2-8XX-VDIM

1	2	3	4	5	6	7	8	9	10
1 Keystone Technologies	2 Fixture Type	3 LED Lamp	4 Max Wattage	5 Size	6 Style	7 CRI	8 CCT	9 Dimming	10 Additional Options
	WP Wallpack			M Medium	2 Full-Cutoff	8 >80		VDIM 0-10V	
							40 4000K		
							50 5000K		

### ORDERING EXAMPLES

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES\*

KT-WPLED60-M2-8XX-VDIM /MW3/515P6/EM12

FIXTURE WITH SINGLE FACTORY-INSTALLED ACCESSORY

KT-WPLED60-M2-8XX-VDIM /MW3

FIXTURE WITH NO FACTORY-INSTALLED ACCESSORIES

KT-WPLED60-M2-8XX-VDIM

\* When ordering more than one factory-installed accessory, use multiple suffixes as shown in the ordering examples above.  
**Note:** All accessories can also be ordered separately for field installation using just their regular Catalog Number, UPC, or Easy Code.

#### KEYSTONE FIXTURE

CATALOG NUMBER
KT-WPLED60-M2-8XX-VDIM

#### SENSORS

SUFFIX	CATALOG NUMBER
✓ /MW3	KTS-MW3-UV-KO-K1

#### CORD SETS

SUFFIX	CATALOG NUMBER
✓ /515P6	KT-CS-515P-6-18/3

#### EMERGENCY BACKUP

SUFFIX	CATALOG NUMBER
✓ /EM12	KT-EMRG-LED-12C-1200