



PRODUCT FEATURES



STARTING METHOD: Rapid	INPUT VOLTAGE: 120VAC $\pm 10\%$	WARRANTY: 3 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 60Hz	POWER FACTOR: Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Ballast frequency for all listed lamps: 45KHz-55KHz
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F13T5	2	120	23.0	0.37	0.52	1.60	0.95	4.06	150	F2-8
F13T5 + F8T5	2	120	19.0	0.31	0.51	1.53	0.90	4.74	150	F2-8
CFQ13W/G24q	2	120	22.0	0.36	0.51	1.52	0.95	4.31	150	P2-1

WIRING DIAGRAMS

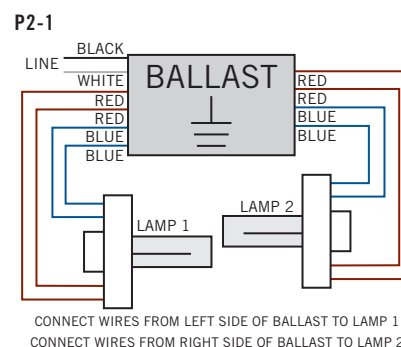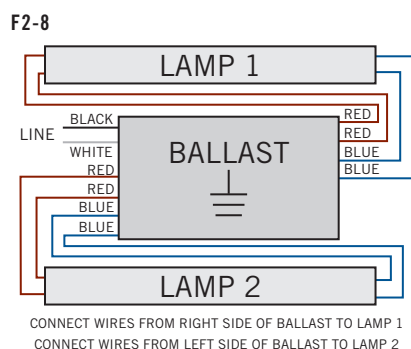




KTEB-213-1-TP-SL-MB

T5 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

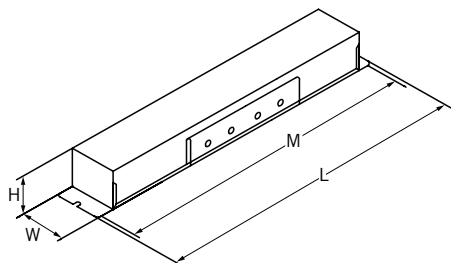

CASE DIMENSIONS


LENGTH: 9.00"
WIDTH: 1.19"
HEIGHT: 0.95"
MOUNTING: 8.75"
UNIT WEIGHT: 1.13 lbs

STANDARD LEAD LENGTHS*

BLACK: 18.00"
WHITE: 18.00"
BLUE: 24.00" X 24.00" X 24.00" X 24.00"
RED: 24.00" X 24.00" X 24.00" X 24.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

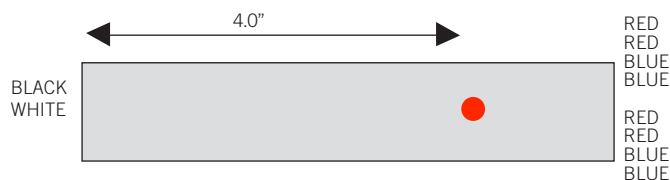

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-213-1-TP-SL-MB-CP	Carton	50	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-213-1-TP-SL-MB

Keystone Technologies
Electronic Ballast

2
Lamps

13
Watts

120V
Input

Thermally
Protected

Slim Case
Style

Mounting
Bracket