



KTEB-2C72-1-TP-WS	
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Parallel
Input Voltage	120Vac $\pm$ 10%
Input Frequency	60Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
FC8T9 + FC12T9	2	39	0.60	0.54	1.46	0.76	1.95	150
FC12T9 + FC16T9	2	49	0.73	0.56	1.68	0.70	1.43	150

PERFORMANCE:


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- Lamp end-of-life protected
- 3-Year Warranty

APPROVALS:


- UL, cUL 935 listed

PHYSICAL DIMENSIONS:


Length (L):	6.46"
Width (W):	1.89"
Height (H):	1.00"
Mounting (M):	6.00"
Lead Length:	
White, Black	12"
Blue	9"
Red	9"

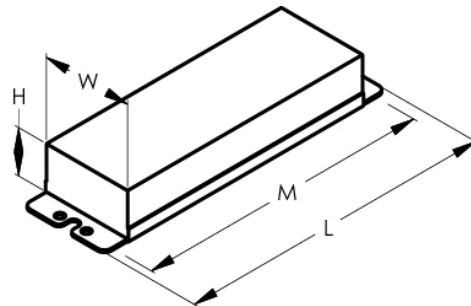

WIRING DIAGRAM:

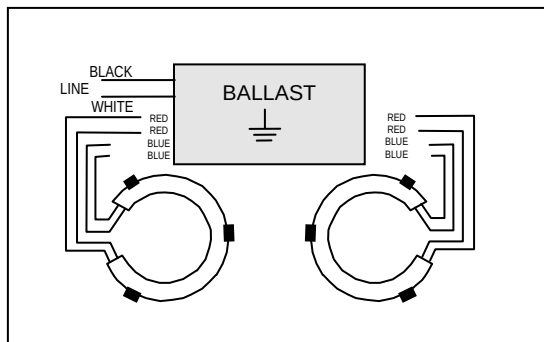

Hot Spot Location:

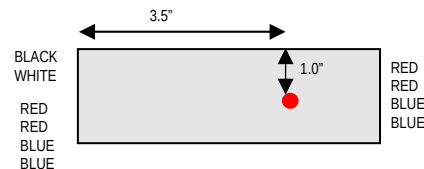

KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM