



KT-LED82P-H-8CSI-D

2-PIN LED LAMP

DESCRIPTION

8.5W 2-Pin LED Lamp | Color Select 2700K, 4000K, 5000K | ≥ 82 CRI



LAMP TYPE: Compact

BULB TYPE: 2-Pin LED

BASE TYPE: G24d

WATTAGE: 8.5W

SELECTABLE COLOR TEMPERATURE: 2700K, 4000K, 5000K

COLOR RENDERING INDEX (CRI): ≥ 82

WARRANTY: 5 Years



PRODUCT FEATURES

- Operating temperature: -20°C/-4°F to 45°C/113°F
- Instant startup
- Environmentally friendly: no mercury used
- Frosted lens eliminates pixelation
- Suitable for use in dry and damp locations
- UL Classified
- Rotatable 270°
- G24D 2-pin can be used in G24Q 4-pin applications for ballast bypass
- Save 50% on energy consumption compared to typical CFL bulbs
- Extend useful life four times (50,000 hours)
- Simplifies installation without the need for an external driver or ballast

OPERATING SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Input Voltage	Lamp Wattage	Power Factor	System Wattage
120-277V	8.5W	>0.9	8.5W

PHOTOMETRIC CHARACTERISTICS


Color Temperature (CCT)	2700K*	4000K	5000K
Luminous Flux	920	1050	1050
Color Rendering Index (CRI)	≥ 82	≥ 82	≥ 82
Bare Lamp Efficacy	108	124	124

*Preset to 2700K

RATED LIFE

L70 (Hours)	50,000
-------------	--------

POLAR CANDELA DISTRIBUTION

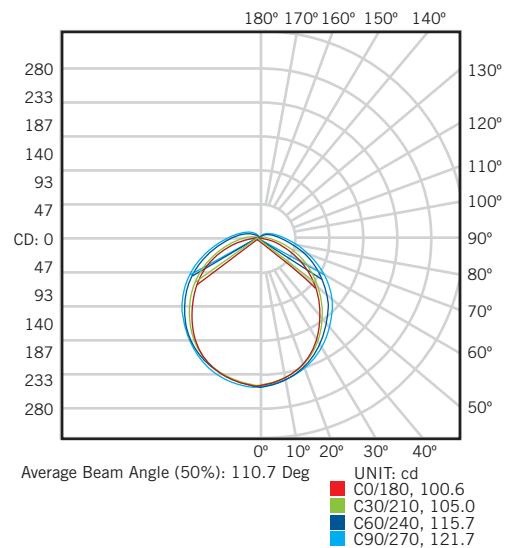


KT-LED82P-H-8CSI-D

2-PIN LED LAMP


WIRING

BYPASS MAGNETIC BALLAST WITH 1 LAMP

BEFORE




AFTER




BYPASS ELECTRONIC BALLAST WITH 1 LAMP

BEFORE

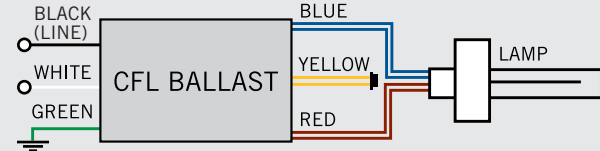


AFTER




BYPASS MAGNETIC BALLAST WITH 2 LAMPS

BEFORE

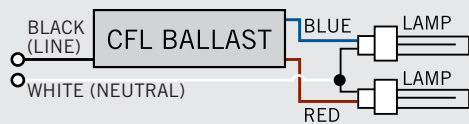


AFTER

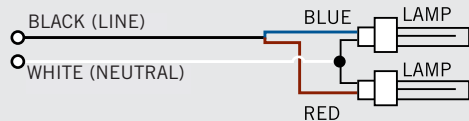


BYPASS ELECTRONIC BALLAST WITH 2 LAMPS

BEFORE

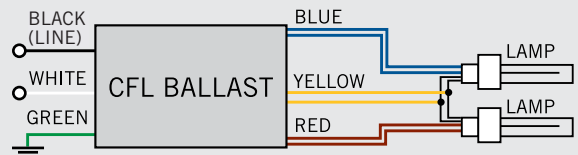


AFTER

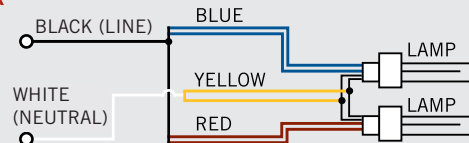

PHYSICAL CHARACTERISTICS

LAMP DIMENSIONS

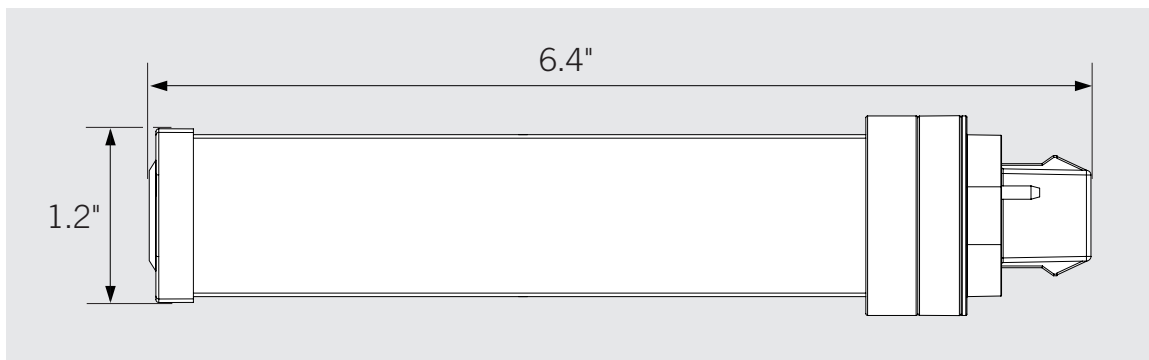



KT-LED82P-H-8CSI-D

2-PIN LED LAMP

ORDERING INFORMATION

ORDER CODE	PACK QTY.	UPC	EASY CODE
KT-LED82P-H-8CSI-D	24	843654137681	JQC-17

CATALOG NUMBER BREAKDOWN

KT-LED82P-H-8CSI-D

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 2-Pin Lamp Type
- 5 Horizontal Orientation
- 6 80 CRI
- 7 Color Select
- 8 Color Select Designation
- 9 Direct Drive Series

8 Color Select Designation

I	2700K, 4000K, 5000K
---	---------------------