

LED-4-S9W-5CCT-FG

4" Round Floating Gimbal Recessed LED 9W 5CCT

Type IC & Air-Tight



DESCRIPTION

4" LED Floating Gimbal

Adjustable in any direction and easy to use

Perfect for accent lighting

Selectable color changing switch

FEATURES & BENEFITS

Ideal for slopped ceilings, wall washing, highlighting artwork, task or general lighting.

1 3/8" Deep - Fits in 1" ceiling space

Type IC Rated - No Housing Required

Driver Inside Connection Box - No Junction Box Needed

5 CCT Switchable - from 2700K to 5000K

White and Black trims in stock

Damp Location & Airtight



ORDERING GUIDE

White Trim LED-4-S9W-5CCT-FG-WH
Black Trim LED-4-S9W-5CCT-FG-BK

Project:

Location:


Model: Qty:

Notes:

| SPECIFICATION | |
|-----------------------|--|
| Applications | Slopped ceilings, Wall washing, General lighting |
| Energy Used | 9 W |
| Color Temperature (K) | 5 CCT switchable: 2700 - 3000 - 3500 - 4000 - 5000 |
| Light Output (lm) | 740 - 770 - 820 - 850 - 855 |
| Halogen Equivalent | 60 W |
| Beam Angle | 38° |
| CRI | 90+ |
| Driver Input | 120V AC 50/60 Hz |
| Dimming | TRIAC Dimmers 10% - 100% |
| Approved Location | Insulated Ceiling & Damp Locations |
| Air Tight | Yes |
| Ambient Temperature | -4°F (-20°C) to +104°F (+40°C) |
| Projected Life | 70% Light Output at 50,000 Hours |
| Certification | cETLus, Energy Star |
| Warranty | 3 Year |

DIMENSIONS ID 4" OD 4 7/8" Depth 1 3/8"

Cut Out 4 1/8" to 4 1/4" 120V Triac Dimmable Driver Included

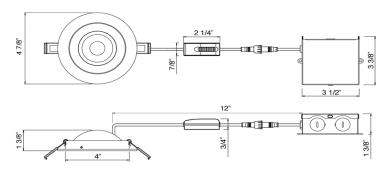

ACCESSORIES Sold Separately



13" Mounting Plate Flat cat # MP4-2



26" Flat Rough-In Plates - cat # RIP4



Flanged Plate with Hanger Bars - cat # FRP4

Jumper Cable 10 ft cat # JC-10

Maximum Extension 40 feet



Goof Ring OD 5 3/4"

White cat # GR4

Black cat # GR4-BK