

LED Decorative G9 120 Volts



2W Clear

ITEM	G-83417	G-83425
DESCRIPTION	G9/2/LED/D/27K	G9/2/LED/D/50K
COLOR TEMP	2700K	5000K
OUTPUT LUMEN	200	200
BEAM ANGLE	300	300
WATTAGE	2W	2W
EQUIV. WATTAGE	30W	30W
CRI	>80	>80
DIMMABLE	YES	YES
MOL (IN/MM)	1.10/28	1.10/28
DIAMETER MOL (IN/MM)	0.45/11.70	0.45/11.70
PACKAGE (INNER/MASTER)	20/300	20/300



2W Frosted

ITEM	G-83416
DESCRIPTION	G9/2/F/LED/D/27K
COLOR TEMP	2700K
OUTPUT LUMEN	200
BEAM ANGLE	300
WATTAGE	2W
EQUIV. WATTAGE	30W
CRI	>80
DIMMABLE	YES
MOL (IN/MM)	1.10/28
DIAMETER MOL (IN/MM)	0.45/11.70
PACKAGE (INNER/MASTER)	20/300



3.5W Clear

ITEM	G-83419	G-83427
DESCRIPTION	G9/3.5/LED/D/27K	G9/3.5/LED/D/50K
COLOR TEMP	2700K	5000K
OUTPUT LUMEN	400	400
BEAM ANGLE	300	300
WATTAGE	3.5W	3.5W
EQUIV. WATTAGE	40W	40W
CRI	>80	>80
DIMMABLE	YES	YES
MOL (IN/MM)	1.50/50	1.50/50
DIAMETER MOL (IN/MM)	0.70/18.00	0.70/18.00
PACKAGE (INNER/MASTER)	20/300	20/300



3.5W Frosted

ITEM	G-83418
DESCRIPTION	G9/3.5/F/LED/D/27K
COLOR TEMP	2700K
OUTPUT LUMEN	400
BEAM ANGLE	300
WATTAGE	3.5W
EQUIV. WATTAGE	40W
CRI	>80
DIMMABLE	YES
MOL (IN/MM)	1.50/50
DIAMETER MOL (IN/MM)	0.70/18.00
PACKAGE (INNER/MASTER)	20/300



Warranty:
1 years




Lifetime:
25,000 hours




Dimmable:
5%



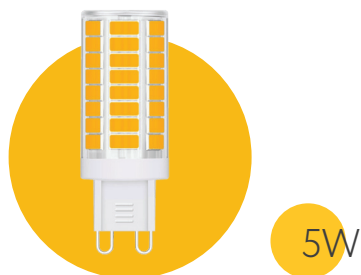


5W

ITEM	G-19964
DESCRIPTION	G9/5/LED/D/27K
COLOR TEMP	2700K
OUTPUT LUMEN	525
BEAM ANGLE	300
WATTAGE	5W
EQUIV. WATTAGE	50W
CRI	>80
DIMMABLE	YES
MOL (IN/MM)	1.50/50
DIAMETER (IN/MM)	0.75/19.00
PACKAGE (INNER/MASTER)	20/300

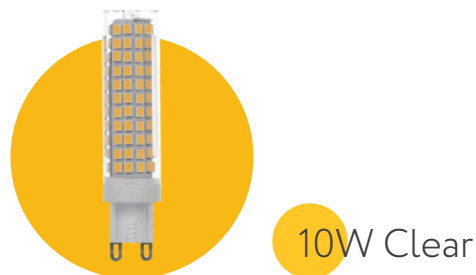


10W Clear

ITEM	G-95921	G-95922	G-95923	G-95924
DESCRIPTION	G9/10/D/LED/30K	G9/10/D/LED/35K	G9/10/D/LED/41K	G9/10/D/LED/50K
COLOR TEMP	3000K	3500K	4100K	5000K
OUTPUT LUMEN	1150	1150	1150	1150
BEAM ANGLE	360	360	360	360
WATTAGE	10W	10W	10W	10W
EQUIV. WATTAGE	100W	100W	100W	100W
CRI	>80	>80	>80	>80
DIMMABLE	YES	YES	YES	YES
MOL (IN/MM)	3.08/78	3.08/78	3.08/78	3.08/78
DIAMETER MOL (IN/MM)	0.70/17.78	0.70/17.78	0.70/17.78	0.70/17.78
PACKAGE (INNER/MASTER)	20/300	20/300	20/300	20/300

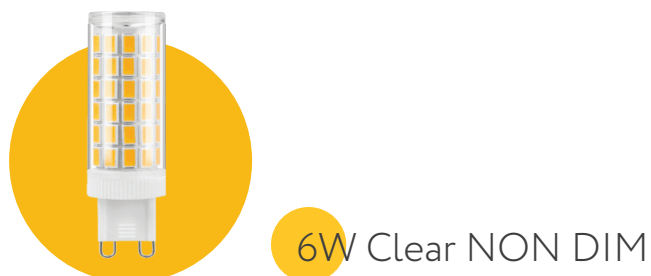

6W Clear NON DIM

ITEM	G-20197	G-20198	G-20199
DESCRIPTION	G9/6/LED/30K	G9/6/LED/41K	G9/6/LED/50K
COLOR TEMP	3000K	4100K	5000K
OUTPUT LUMEN	900	900	900
BEAM ANGLE	360	360	360
WATTAGE	6W	6W	6W
EQUIV. WATTAGE	75W	75W	75W
CRI	>80	>80	>80
DIMMABLE	NO	NO	NO
MOL (IN/MM)	2.68/68	2.68/68	2.68/68
DIAMETER MOL (IN/MM)	0.68/17.00	0.68/17.00	0.68/17.00
PACKAGE (INNER/MASTER)	20/300	20/300	20/300

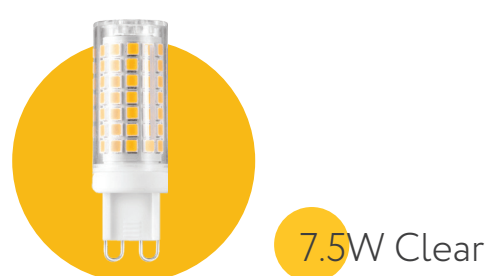

7.5W Clear

ITEM	G-83515	G-83518	G-83516	G-83517
DESCRIPTION	G9/7.5/LED/D/30K	G9/7.5/LED/D/35K	G9/7.5/LED/D/41K	G9/7.5/LED/D/50K
COLOR TEMP	3000K	3500K	4100K	5000K
OUTPUT LUMEN	750	750	750	750
BEAM ANGLE	300	300	300	300
WATTAGE	7.5W	7.5W	7.5W	7.5W
EQUIV. WATTAGE	60W	60W	60W	60W
CRI	>80	>80	>80	>80
DIMMABLE	YES	YES	YES	YES
MOL (IN/MM)	1.75/50	1.75/50	1.75/50	1.75/50
DIAMETER MOL (IN/MM)	0.80/20.00	0.80/20.00	0.80/20.00	0.80/20.00
PACKAGE	20/300	20/300	20/300	20/300



Warranty:
1 years



Lifetime:
25,000 hours



Dimmable:
5%

