

Project: _____

Part#: _____

Type: _____

Round Slim Canopy Light



Light up your parking garage with the EnVision Round Slim Canopy Light. This canopy light is easy to install, offers high efficiency, and is available in tri-color (30K/40K/50K) temperatures. Provide unparalleled lighting for parking structures with unique reverse-throw lighting, which emits light upward as well as down. Optional motion sensor modulates light intensity when nearby vehicles or occupants are detected.

Applications:

- Parking Structures

Detail Specifications

- Operating temperature -4 -- + 124 F°
- PF >0.9 / Input: .85A/ Output: 36-66V DC

Why the EnVision Parking Garage Light?:

- Optic lens provides forward throw light
- Easy installation with universal mounting plate
- 5 year limited warranty.

Product Information:

- IP65-rated, Integrated driver, 100-277VAC
- Dimmable using 0-10V control
- No ultraviolet light emitted
- Easy to install and operate.
- Energy saving, Long lifespan.
- Instant start, NO flickering, NO humming.

LED - RCP - Watts - TRI - WH - Accessories - EMB - Warranty

1 2 3 4 5 6 7

1	Product	2	Watts	3	Color	4	Finish	5	Accessories	6	EMB	7	Warranty
LED-RCP	Round Slim Canopy Light	25W 55W 100W	25W / 3,350ml 55W / 7,423ml 100W / 13,400ml	TRI	30/40/50K	WH	White	(Blank) SBT BMS	None Bluetooth Control Bi-Level Motion Sensor	(Blank) EMB	None Emergency Backup (20W)	(Blank) 10YR	5 Years (incl.) 10 Years

Specs and model numbers are subject to change with or without notice

Product Features

Aluminum Housing

Built with an aluminum housing, this fixture is built to last

Ribbed Lens

Reduces glare to avoid eye discomfort



Integrated Driver

This fixture is dimmable with the IP65-rated, 100-277vac integrated driver

Reverse-Throw Lighting


Provide unparalleled lighting for parking structures with unique reverse-throw lighting, which emits light upward as well as down

10.03in

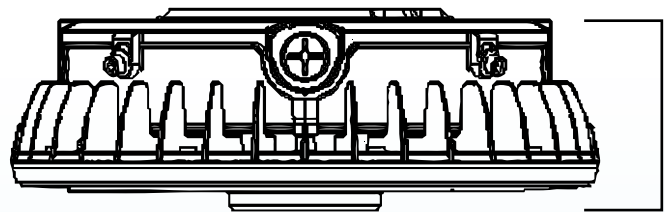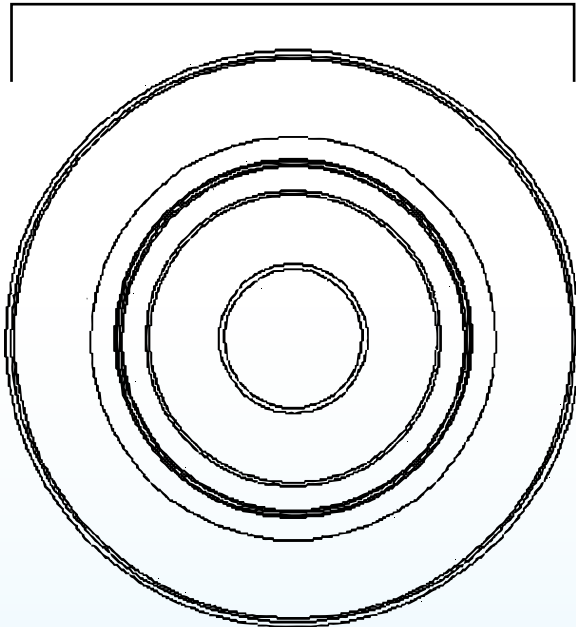


3.11in

Luminous Intensity Distribution Curve

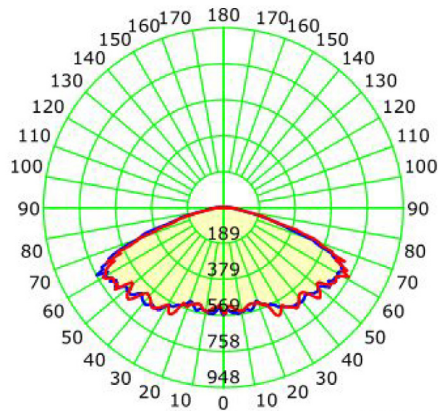


— C0-C180 — C90-C270

Illuminance at a Distance

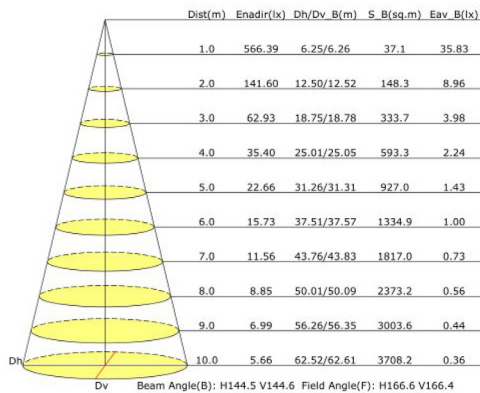


25W

Luminous Intensity Distribution Curve

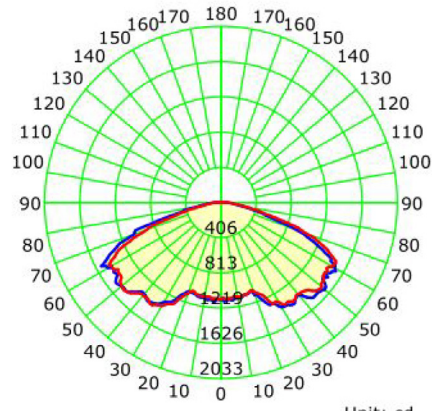


— C0-C180 — C90-C270

Illuminance at a Distance

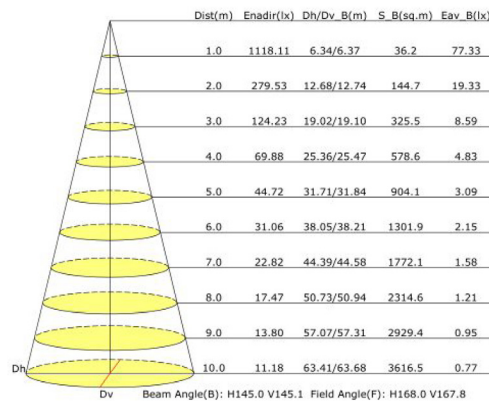


55W

Luminous Intensity Distribution Curve

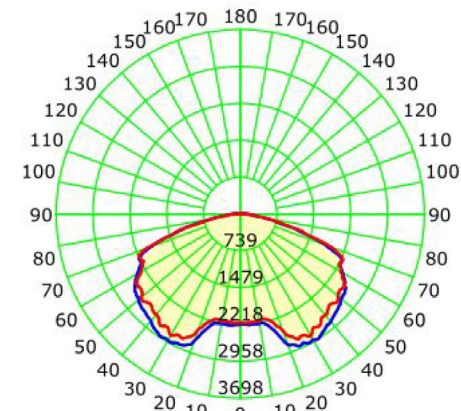


— C0-C180 — C90-C270

Illuminance at a Distance

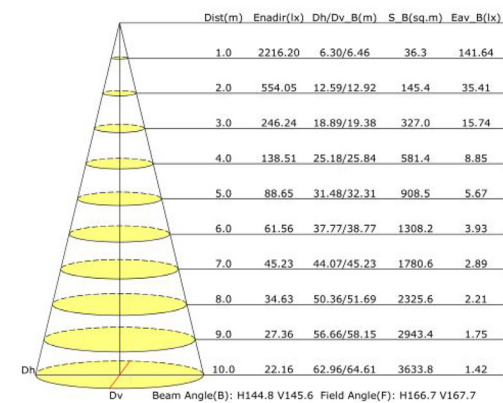


100W


MOTION SENSOR INFORMATION

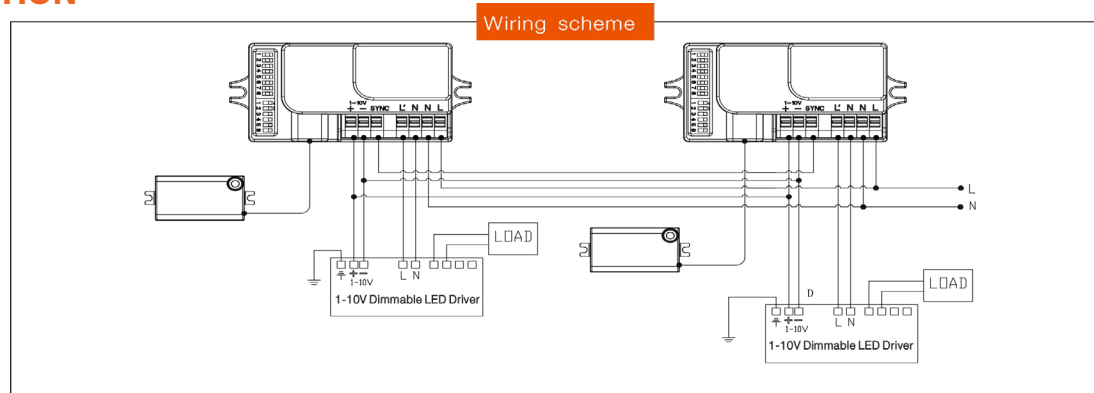


FEATURES

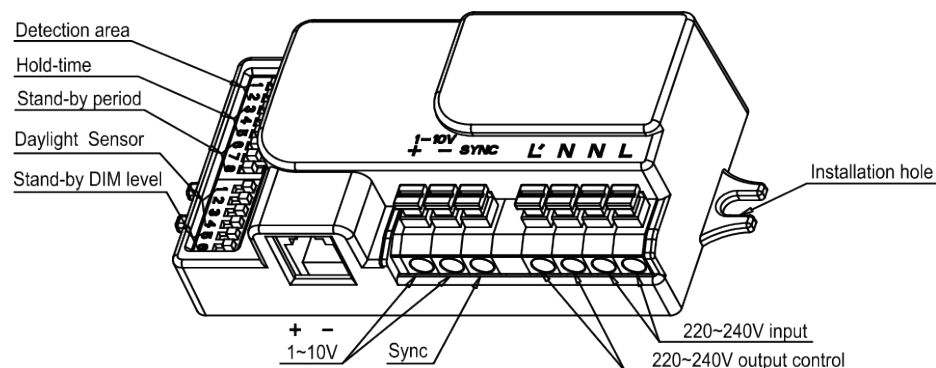

DETECTION PATTERN



Wall mounting pattern (Unit: m)
Suggested installation height: 1-1.8m

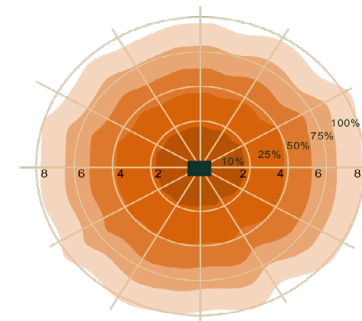

Ceiling mounting pattern (Unit: m)
Suggested installation height: 2.5-8m

DIMENSIONS

